

# 目录

## Catalog

|               |                                                                  |       |
|---------------|------------------------------------------------------------------|-------|
| 目录            | Catalog                                                          | 1     |
| 公司简介          | Company Profile                                                  | 2     |
| 常见软磁材料参数对比    | Comparison of Soft Magnetic Material                             | 3-4   |
| 常见计算公式        | Calculation Formula                                              | 5-6   |
| 铁芯护盒参数及应用     | Protective Housing Specification                                 | 7-8   |
| 铁基纳米晶带材       | Fe-based Nanocrystalline Strip                                   | 9-11  |
| 铁基非晶带材        | Fe-based Amorphous Strip                                         | 12-13 |
| 1K202钴基非晶带材   | 1K202 Co-based Amorphous Strip                                   | 14-15 |
| 1K201钴基非晶带材   | 1K201 Co-based Amorphous Strip                                   | 16-17 |
| 铁基纳米晶共模滤波电感铁芯 | Fe-based Nanocrystalline CMC Core                                | 18-24 |
| 铁基非晶C型铁芯      | Fe-based Amorphous C-Core                                        | 25-29 |
| 铁基纳米晶C型铁芯     | Fe-based Nanocrystalline C Core                                  | 30-32 |
| 三相E型铁芯        | Three Phase E-Core                                               | 33    |
| 铁基非晶块铁芯       | Fe-based Amorphous Blocked Core                                  | 34    |
| 铁基纳米晶环形切割铁芯   | Fe-based Nanocrystalline Toroidal Split Core                     | 35-37 |
| 铁基纳米晶电流互感器铁芯  | Fe-based Nanocrystalline Current Transformer Core                | 38-40 |
| 铁基非晶滤波电感铁芯    | Fe-based Amorphous Core for Filtering Inductor                   | 41-43 |
| 铁基纳米晶高频变压器铁芯  | Fe-based Nanocrystalline High Frequency Voltage Transformer Core | 44-47 |
| CACO-01钴基非晶铁芯 | CACO-01 Co-based Amorphous Core                                  | 48-51 |
| CACO-02钴基非晶铁芯 | CACO-02 Co-based Amorphous Core                                  | 52-54 |

# 公司简介

## Company Profile

We are Hefei Ruyue ElectricTechnology Co., Ltd. We are the leading Company and excellent Supplier & exporter Of magnetic material. Our business involved high-performance amorphous alloy soft magnetic materials and its components etc., Special designs of amorphous nanocrystalline products are available concering Customer’ S Demands.

We, manufacture of soft magnetic alloy core, Amorphous cores, Nanocrystalline cores, CT (Current Transformers), Inductors, Inductors and Transformers. The products are as follows: --Common Mode Filter Chokes -- Split CT -- Current Transformers -- Differential Mode Chokes -- Automotive Chokes (for car audios) -- Magnetic Amplifiers -- PFC Chokes -- Cores and Current Transformers for energy meters (Watt hour meters) -- ELCB (Earth Leakage Circuit Breakers) -- Toroidal transformers -- Magnetic ballasts. Our R&D team, LED by experienced professors and senior engineers, is dedicated to developing new products to satisfy customers’ requirements. We will offer Comprehensive Solutions on magnetic projects to meet your Design Needs.

常用软磁材料参数对比

Comparison of Soft Magnetic Material

|             | 分类<br>Item                           | 名称<br>Name | 饱和磁感应强度<br>T<br>Saturate<br>induction | 初始磁导率<br>Initial<br>permeability | 电阻率<br>μΩ•cm<br>Resistivity | 居里温度℃<br>Curie<br>temperature | 加工形状及性能特点<br>Machining shape and<br>performance characteristics                                                                                                                                                                                                                                                  |
|-------------|--------------------------------------|------------|---------------------------------------|----------------------------------|-----------------------------|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 带状<br>Strip | 铁基非晶<br>Fe-based<br>Amorphous        | 1K101      | 1.56                                  | 0.25k~5k                         | 130                         | 400                           | 仅卷绕、可切割，价格略高于硅钢，用于变压器时工作频率一般不超过20kHz，带材厚度一般在25-29μm。<br>Can be wound and cut, price is slightly higher than silicon steel. Working frequency of transformers generally does not exceed 20kHz, thickness is 25-29μm.                                                                                              |
|             |                                      | 1K107A     | 1.15                                  | 20k~80k                          | 110                         | 570                           | 仅卷绕，一般用于逆变变压器铁芯，用于变压器时工作频率不超过50kHz、通过退火可生产F形B-H回线产品，带材厚度一般在23-30μm，三款牌号纳米晶中成本居中。<br>Winding only, generally used for inverter transformer cores, used for transformers whose working frequency does not exceed 50kHz, can produce F-type B-H loop products through annealing, thickness is 23-30μm, medium cost. |
|             | 铁基纳米晶<br>Fe-based<br>Nanocrystalline | 1K107B     | 1.2                                   | 20k-150k                         | 110                         | 570                           | 仅卷绕，一般用于共模电感或仪表互感器铁芯、通过退火可生产F形、R形或Z形B-H回线产品，带材厚度一般在16-27μm，三款牌号纳米晶中成本最高。<br>Winding only, generally used for EMC common mode inductors or instrument transformer cores. F-shaped, R-shaped or Z-shaped B-H loop products can be produced through annealing, thickness is 16-27μm, highest cost.                  |
|             |                                      | 1K107      | 1.25                                  | 80k-200k                         | 90                          | 570                           | 仅卷绕，一般用于电力或仪表互感器铁芯、通过退火可生产R形或Z形B-H回线产品，带材厚度一般在28-40μm，三款牌号纳米晶中成本最低。<br>Winding only, generally used for power or instrument transformer cores. R-shaped or Z-shaped B-H loop products can be produced through annealing, thickness is 28-40μm ,lowest cost.                                                      |
|             |                                      | 1K202      | 0.55                                  | 60k                              | 140                         | 255                           | 可卷绕、模切，一般用于制作高矩形比Z形B-H回线产品、磁传感器铁芯，GFCI铁芯、磁放大器铁芯，成本高<br>Can be wound and die-cut, generally used to make high square ratio Z-type B-H loop product, magnetic sensor cores, GFCI cores, magnetic amplifier cores, high cost.                                                                                       |
|             | 钴基非晶<br>Amorphous<br>Co-based        | 1K201      | 0.9                                   | 800~3000                         | 140                         | 485                           | 可卷绕、一般用于制作低矩形比F型B-H回线产品，应用于仪表互感器铁芯、变压器铁芯，成本高<br>Can be wound, generally used to make low square ratio F-type B-H loop product, used in instrument transformers cores and transformer cores, high cost.                                                                                                           |
|             |                                      |            |                                       |                                  |                             |                               |                                                                                                                                                                                                                                                                                                                  |
|             |                                      |            |                                       |                                  |                             |                               |                                                                                                                                                                                                                                                                                                                  |
|             |                                      |            |                                       |                                  |                             |                               |                                                                                                                                                                                                                                                                                                                  |
|             |                                      |            |                                       |                                  |                             |                               |                                                                                                                                                                                                                                                                                                                  |

| 分类<br>Type           | 名称<br>Item                                | 名称<br>Name | 饱和磁感应强度<br>T<br>Saturate<br>induction | 初始磁导率<br>Initial<br>permeability | 电阻率<br>μΩ•cm<br>Resistivity      | 居里温度℃<br>Curie<br>temperature | 加工形状及性能特点<br>Machining shape and<br>performance characteristics                                                                                                                                                                                                                       |
|----------------------|-------------------------------------------|------------|---------------------------------------|----------------------------------|----------------------------------|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 带状<br>Strip          | 坡莫合金 FeNi                                 | 1J79、1J85  | 0.7                                   | 10k~100k                         | 45                               | 450                           | 可冲片、叠片、卷绕，价格较高，产量大，使用温度高工作频率一般不超过20kHz,通过退火工艺可生产F形B-H回线产品，价格高。<br>It can be punched,laminated and wound.High price,large output and high operating temperature. The operating frequency generally does not exceed 20kHz. F-shaped B-H loop product can be produced through annealing. |
|                      |                                           | 1J50       | 1.5                                   | 10k~100k                         | 45                               | 450                           | 可冲片、叠片、卷绕，价格较高，产量大，使用温度高工作频率一般不超过20kHz,通过退火工艺可生产Z形B-H回线产品，价格高。<br>It can be punched,laminated and wound.High price,large output and high operating temperature. The operating frequency generally does not exceed 20kHz. Z-shaped B-H loop product can be produced through annealing. |
|                      | 硅钢 FeSi                                   | 硅钢片 FeSi   | 1.8~2.1                               | ~10k                             | 45                               | 750                           | 可冲片、叠片、卷绕，价格便宜，产量大，使用温度高工作频率一般不超过400Hz。<br>It can be punched,laminated and wound.Low price,large output and high operating temperature. The operating frequency generally does not exceed 400Hz.                                                                                      |
| 粉芯<br>Powder<br>core | 铁氧体MnZn                                   | /          | 0.35~0.4                              | 1k-15k                           | 10 <sup>4</sup> ~10 <sup>5</sup> | 150-250                       | 产量大，价格低 Low price, large output.                                                                                                                                                                                                                                                      |
|                      | 铁氧体NiZn                                   | /          | 0.2~0.3                               | 12-2k                            | 10 <sup>6</sup>                  | 110-350                       | 高频损耗小 Low loss at high frequency.                                                                                                                                                                                                                                                     |
|                      | 铁粉芯 Fe                                    | /          | 1.4                                   | 10~75                            | 11                               | 700                           | 价格低，F形B-H回线产品，用于差模电感，高频损耗大，一般用于20kHz以下<br>Low price, F-shaped B-H loop product, used for DMC, high loss at high frequency, generally used below 20kHz.                                                                                                                                |
|                      | 铁硅 FeSi                                   | /          | 1.3                                   | 14~90                            | 50                               | 700                           | 价格低，用于差模电感，Bs高于铁硅铝<br>Low price, normally used in different mode choke, Bs is higher than FeSiAl.                                                                                                                                                                                     |
|                      | 铁硅铝 FeSiAl                                | /          | 1.05                                  | 26~125                           | 80                               | 500                           | 价格低，F形B-H回线产品，用于差模电感，损耗比铁粉芯小约80%<br>Low price, F-shaped B-H loop product, used for DMC, loss is about 80% less than Fe powder core.                                                                                                                                                   |
|                      | MPP<br>铁镍钼 FeNiMo                         | /          | 0.75                                  | 14~550                           | 120                              | 500                           | 粉芯中损耗最低，温度稳定性高，磁致伸缩系数≈0，在粉芯中价格最贵<br>Lowest consumption and highest price in powder core, high temperature stability, magnetostriction coeffi cient≈ 0 .                                                                                                                               |
|                      | 高磁通 HF<br>铁镍50 FeNi50                     | /          | 1.5                                   | 14~200                           | 100                              | 500                           | 价格略低于铁镍钼<br>price is slightly lower than the MPP.                                                                                                                                                                                                                                     |
|                      | 非晶粉末铁芯<br>Amorphous<br>powder core        | /          | 1.56                                  | 60~90                            | 10 <sup>6</sup>                  | 400                           | 环形、柱状、块体，适用于10k-50k，价格接近于铁硅<br>Ring, columnar, block, suitable for 10k-50k, price is close to FeSi.                                                                                                                                                                                   |
|                      | 纳米晶粉末铁芯<br>Nanocrystalline<br>powder core | /          | 1.2                                   | 60~125                           | 10 <sup>6</sup>                  | 570                           | 环形、柱状、块体，适用于20kHz-100kHz，价格远低于高磁通<br>Ring, columnar, block, suitable for 20kHz-100kHz, price is far lower than H-F.                                                                                                                                                                   |

备注：\*表中性能仅供客户初步设计选型用，具体性能参数以承认书为准。      \*可根据客户要求制作各种环形、矩形、钳表形及其它形状的铁芯。  
\* The provided data is for customer's initial design guidelines only, please check the approval data sheet before ordering.    \* Toroidal, Oval, Clamp Shape or other customized designs are available.

# 常见计算公式

## Calculation Formula

有效铁芯截面积 Ae 计算(限环形铁芯)  
Effective Cross Section Area Ae (toroid core)

$$Ae = \frac{OD-ID}{200} \times HT \times K$$

平均磁路长度 Le 计算(限环形铁芯)  
Average Magnetic Path Length Le (toroid core)

$$Le = \frac{OD+ID}{20} \times \pi$$

电感量 L 计算  
Inductance Value L

$$L = AL \times N^2$$

$$Ls = \frac{40\pi\mu'N^2Ae}{Le}$$

$$|\mu| = \sqrt{\mu'^2 + \mu''^2}$$

- OD: 裸铁芯外径 Outer diameter of bare core (mm)
- ID: 裸铁芯内径 Inner diameter of bare core (mm)
- HT: 裸铁芯高度 Height of bare core (mm)
- K: 铁芯叠片系数 Lamination factor
- Ae : 有效铁芯截面积 Effective cross section area (cm²)

- Le : 平均磁路长度 Average magnetic path length (cm)

- L: 电感量 Inductance value (μH)
- AL: 电感系数(单匝电感) Inductance coefficient (μH)
- N: 匝数 Turn

- Ls: 串联电感量 Series Inductance (μH)

- |μ|: 振幅磁导率 Amplitude permeability( 万 -Gs/Oe)
- μ ' : 实部磁导率 Real part permeability( 万 -Gs/Oe)
- μ '' : 虚部磁导率 Imaginary part permeability( 万 -Gs/Oe)

磁通密度 Bmax 计算  
Magnetic Flux Density Bmax Calculation

$$B_{max} = \frac{E_{rms}10^5}{4.44fAeN_2}$$

交流磁场强度 Hsin  
Gnetic Field Strength Hsin

$$H_{sin} = \frac{\sqrt{2}N_1I_{AC}}{Le}$$

交流磁场强度 H1  
AC Magnetic Field Strength H1

$$H_1 = 0.4\pi H_{sin} \times 10^{-3}$$

直流磁场强度  
DC Magnetic Field Strength

$$H_{DC} = \frac{N \cdot I_{DC}}{Le}$$
$$H_{oe} = 0.4\pi H_{DC} \times 10^{-3}$$

相对磁导率μr  
Relative Permeability μ r

$$\mu_r = \frac{B}{H_1}$$

数字电桥综合测试系统  
LCR Testing Device

“ 数字电桥综合测试系统 ”应用于铁芯参数的测试，可快速测量多个磁性能参数、磁导率、模拟铁芯损耗等，满足一些客户需要测量 μ'、μ''、损耗 P 等生产批量测试的要求。

LCR testing device can be used to test the core parameters, it can quickly measure several magnetic performance parameters, permeability, simulated core loss, etc., can meet the requirements of some customers who need to measure parameters u' ,u'', loss P and other production batch tests.

- Bmax : 最大磁通密度 Maximum magnetic flux density (Gauss)
- Erms : 正弦波有效电压值 Sine wave effective voltage value (mV)
- f : 正弦波电压频率 Sine wave voltage frequency (Hz)
- N2 : 次级匝数 Secondary turns

- Hsin : 正弦波磁场强度 Sine wave magnetic field strength (mA/cm)
- N1 : 初级匝数 Primary turns
- IAC : 初级电流 Primary current (mA)

- H1: 交流磁场强度 AC magnetic field strength (Oe)

- Idc : 直流电 DC current(mA)
- Hdc: 直流磁场强度 DC magnetic field strength (mA/cm)
- Hoe: 直流磁场强度 DC magnetic field strength (Oe)

- μr : 相对磁导率 Relative permeability
- B : 磁通密度 Magnetic flux density (Gauss)




铁芯常用护盒参数及应用

Protective Housing Specification

| 护盒材质<br>Protective<br>Housing<br>Material | 材质牌号<br>Mode | 耐温等级<br>Temperature<br>resistance<br>grade | 环保等级<br>Environmental<br>protection grade             | 常用颜色<br>Color         | 应用产品<br>Application                              |
|-------------------------------------------|--------------|--------------------------------------------|-------------------------------------------------------|-----------------------|--------------------------------------------------|
| PBT                                       | 5829F        | 130℃                                       | RoHS 无卤 无红磷<br>RoHS halogen-free<br>no red phosphorus | 白色、黑色<br>White, Black | 各种铁芯外壳<br>Protective Housing<br>of various cores |
|                                           | 4830         | 130℃                                       | RoHS 有卤 无红磷<br>RoHS halogen<br>no red phosphorus      | 白色、黑色<br>White, Black |                                                  |
|                                           | 3080G        | 130℃                                       |                                                       |                       |                                                  |
|                                           | 4130         | 130℃                                       |                                                       |                       |                                                  |
| PA66                                      | FR52G30      | 140℃                                       | RoHS 无卤 无红磷<br>RoHS halogen-free<br>no red phosphorus | 黑色<br>Black           |                                                  |
|                                           | A3X2G5       | 130℃                                       | RoHS 无卤 有红磷<br>RoHS halogen-free<br>red phosphorus    | 棕红色<br>Brown-red      |                                                  |
|                                           | A3X2G7       | 130℃                                       | RoHS 无卤 有红磷<br>RoHS halogen-free<br>red phosphorus    | 棕红色<br>Brown-red      |                                                  |
|                                           | FR50         | 140℃                                       | RoHS 有卤 无红磷<br>RoHS halogen<br>no red phosphorus      | 黑色<br>Black           |                                                  |
| PET                                       | FR530        | 155℃                                       | RoHS 有卤 无红磷<br>RoHS halogen<br>no red phosphorus      | 米黄色<br>Maize-yellow   |                                                  |

| 护盒材质<br>Protective<br>Housing<br>Material   | 材质牌号<br>Mode | 耐温等级<br>Temperature<br>resistance<br>grade | 环保等级<br>Environmental<br>protection grade        | 常用颜色<br>Color                        | 应用产品<br>Application                                                                                        |
|---------------------------------------------|--------------|--------------------------------------------|--------------------------------------------------|--------------------------------------|------------------------------------------------------------------------------------------------------------|
| PPS                                         | GF40         | 180°C                                      | RoHS 有卤 无红磷<br>RoHS halogen<br>no red phosphorus | 黑色<br>Black                          | 各种铁芯外壳<br>Protective Housing<br>of various cores                                                           |
|                                             | A504         |                                            |                                                  |                                      |                                                                                                            |
| LCP                                         | E4008        | 200°C                                      | RoHS 有卤<br>RoHS halogen                          | 黑色<br>Black                          | 护盒壁厚大于 1.2mm<br>Wall thickness<br>of the protective<br>case is > 1.2mm                                     |
| 团状模塑料<br>Dough(Bulk)<br>molding<br>compound | DMC(BMC)     | 150°C                                      | RoHS                                             | 白色、黑色<br>White, Black                | 护盒壁厚大于 1.8mm,<br>尺寸大于 70mm<br>Wall thickness of<br>the protective housing<br>is > 1.8mm,<br>size is > 70mm |
| 不锈钢<br>Stainless<br>steel                   | 201          | 750°C                                      | 达不到 RoHS 标准<br>Not up to RoHS standard           | 本色：金属色<br>Natural color:<br>metallic | 尺寸大于 100mm<br>的电力互感器铁芯<br>Power transformer<br>core with<br>size > 100mm                                   |
|                                             | 304          | 750°C                                      | RoHS                                             | 本色：金属色<br>Natural color:<br>metallic |                                                                                                            |

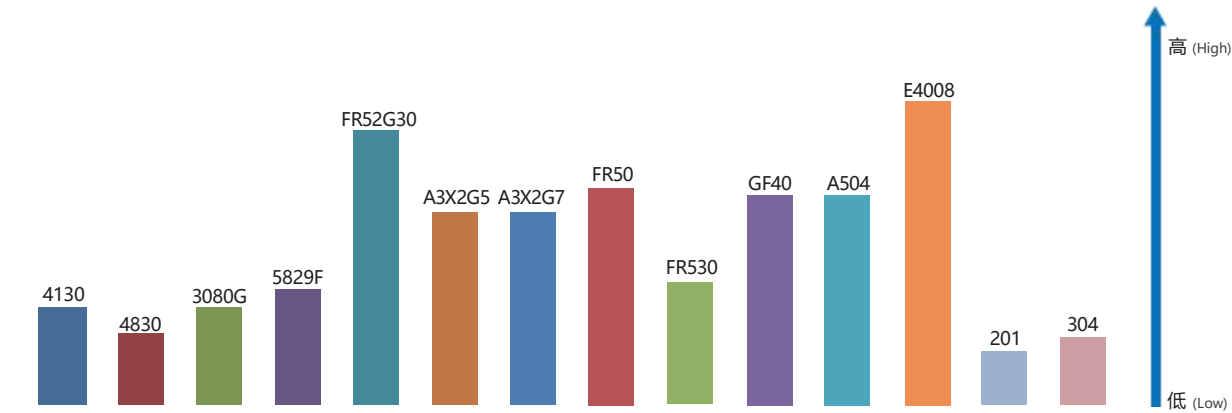

铁芯常用护盒原材料成本对比图表(成本对比仅供参考，不含加工费)

Raw material cost comparison chart of core case (Cost comparison is for reference only, excluding processing fee)

# 铁基纳米晶带材

## Fe-based Nanocrystalline Strip

铁基纳米晶合金由铁、硅、硼、铌、铜等组成。含有 Cu 和 Nb 的铁基非晶合金在晶化温度以上退火时，会形成非常细小的晶粒组织，晶粒尺寸仅有 10—20 纳米，这种非晶合金经过特殊的晶化退火而形成的晶态材料称为纳米晶合金。纳米晶材料具有高饱和磁感应强度、高导磁率、低矫顽力、低损耗及良好的稳定性、高强韧性及耐磨耐蚀等优异特性，作为在金属软磁材料中具有最佳的性价比的纳米晶合金材料，可以替代硅钢、坡莫合金和铁氧体成为中高频变压器、互感器、共模电感元器件的理想材料。

Fe- based Nanocrystalline alloys are based on Fe with Si and B with further additions of Nb and Cu. A subsequent heat treatment at crystallization temperature degree transforms the initially amorphous microstructure of the tape into the desired nanocrystalline state, this being fine crystalline grains (grains diameter of 10 - 20 nm only) .

Nanocrystalline alloys combine high saturation flux density, high permeability, lowest coercivity, low core losses and good stability, high obdurability, and wear corrosion resistance, that make Nanocrystalline material as the best choice of soft magnetic materials and vastly superior in many aspects such as medium high frequency transformer, current transformer, CMC, can replace silicon steel, permalloy and ferrite materials



### 应用领域 Application

- 共模滤波电感铁芯  
EMC Common mode core
- 逆变变压器铁芯  
Inverter transformer core
- 电流互感器(零序、漏保) 铁芯  
Current transformer CT core
- 磁放大器、尖峰抑制器、饱和电感铁芯  
Magnetic amplifier, peak suppressor, saturated inductance core
- 无线充电隔磁片  
Wireless charging electromagnetic shielding foil

### 1K107B 纳米晶薄带性能 Performance of 1K107B Nanocrystalline Strip

| 项目<br>Item                                  | 性能指标(参考值)<br>Performance<br>(Reference) | 项目<br>Item                           | 性能指标(参考值)<br>Performance<br>(Reference) |
|---------------------------------------------|-----------------------------------------|--------------------------------------|-----------------------------------------|
| 饱和磁感应强度 Bs (T)<br>Saturate Induction        | 1.20                                    | 磁致伸缩系数λs<br>Magnetostriction         | 2.0×10 <sup>-6</sup>                    |
| 居里温度 Tc (°C)<br>Curie Temperature           | 570                                     | 密度 ρ (g/cm <sup>3</sup> )<br>Density | 7.3                                     |
| 晶化温度 Tx (°C)<br>Crystallization Temperature | 515                                     | 电阻率δ (μΩ•cm)<br>Resistivity          | 110                                     |
| 硬度 Hv<br>Hardness                           | 880                                     | 矫顽力 Hc (A/m)<br>Coercivity           | <2.0                                    |
| 带材厚度 μm<br>Thickness                        | 14 ~ 27                                 | 铁芯填充系数 K<br>Core filling coefficient | 0.78                                    |
| 磁导率 μ' @1kHz (Gs/Oe)<br>Permeability        | 20k ~ 130k                              | 铁损 P 20kHz/0.5T (W/kg)<br>Core loss  | <20                                     |
| 磁导率 μ' @10kHz (Gs/Oe)<br>Permeability       | 18k ~ 120k                              | 铁损 P 100kHz/0.3T (W/kg)<br>Core loss | 90                                      |
| 磁导率 μ' @100kHz (Gs/Oe)<br>Permeability      | 16k ~ 35k                               | \                                    | \                                       |

### 1K107B 纳米晶薄带产品规格 Specification of 1K107B Nanocrystalline Strip

| 产品规格编码说明        | J                     | 1K107B                             | 030              | 23                    | 2                                 |
|-----------------|-----------------------|------------------------------------|------------------|-----------------------|-----------------------------------|
| P/N Description | 剪切带<br>Slitting Strip | 纳米晶 B 料<br>Nanocrystalline B Strip | 带宽 (mm)<br>Width | 带厚 (μ m)<br>Thickness | 厚度公差 (μ m)<br>Thickness Tolerance |

产品规格编码说明：J1K107B-030-232 铁基纳米晶 1K107B 剪切带，宽度 3.0mm，厚度 23±2.0μm。  
Description: J1K107B-030-232, 1K107B Nanocrystalline slitting strip, width is 3.0mm, thickness is 23±2.0μm.

常用带材规格宽度 Common Strip Width

|                 |     |     |     |     |     |     |     |     |     |     |     |      |
|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|
| 带材宽度 Width (mm) | 2.0 | 3.0 | 3.2 | 3.5 | 4.0 | 4.5 | 5.0 | 6.0 | 6.5 | 7.0 | 8.0 | 10.0 |
| 带材宽度 Width (mm) | 12  | 13  | 15  | 20  | 25  | 30  | 35  | 40  | 45  | 50  | 55  | 60   |

常用带材规格说明 Common Specifications

| 中研产品规格<br>P/N    | 带材宽度 (mm)<br>Width | 带材厚度 (μ m)<br>Thickness |
|------------------|--------------------|-------------------------|
| J1K107B-030-16-2 | 3.0                | 14-16                   |
| J1K107B-030-18-2 |                    | 16-18                   |
| J1K107B-030-182  |                    | 18±2                    |
| J1K107B-030-202  |                    | 20±2                    |
| J1K107B-030-232  |                    | 23±2                    |
| J1K107B-030-252  |                    | 25±2                    |

注 Note:

1、带材最宽为 60mm。  
Max width is 60mm.

2、可以根据用户需求，提供其它规格的带材。  
Other customized size strip is available.

3、规范性引用文件：《GB/T 19345.1-2017》非晶、纳米晶合金 第 2 部分：铁基纳米晶软磁合金带材，纳米晶牌号 1K107B 等同于 GB/T 19345.1-2017 类别 H 型带材。  
Normative reference: 《GB/T 19345.1-2017》Amorphous and Nanocrystalline alloys Part 2: Fe-based nanocrystalline soft magnetic alloy strip.Nanocrystalline grade 1K107B is equivalent to GB/T 19345.1-2017 category H-type strip.

4、1K107B 带材性能等同于日立金属 FT-3, VAC 500F。  
Strip performance of 1K107B is equivalent to Hitachi FT-3, VAC 500F.

# 铁基非晶带材 Fe-based Amorphous Strip

铁基非晶带材具有非晶态结构，以及高的磁导率、高饱和磁感应强度、低铁损和优良的稳定性，满足了当今电子产品向高频化、大电流、小型化、节能化的发展需要，可以替代硅钢、坡莫合金和铁氧体，广泛应用于电力、电子产品中。

非晶是一种新型软磁合金材料，它采用国际先进的超急冷技术将熔融金属以每秒百万度的速度直接冷却，形成厚度为 27±2μm 的非晶体薄带，得到原子排列组合上具有短程有序，长程无序特点的非晶合金组织，在微观结构上完全不同于传统的金属和合金材料。因此，在物理性能、化学性能、机械性能等诸多方面具有传统金属材料无可比拟的优异特性。另外，在制备工艺方面也完全不同于传统的冶金工艺，由钢液一步制成非晶薄带，省去了传统冶金工艺中的铸、锻、中间退火、轧制等多道工序，节省了大量能源，且无污染物排放，非晶合金被誉为环保、节能、高效的新型绿色材料。

Amorphous strip is a new soft magnetic material. It is produced through the advanced technology of rapid solidification of molten metal at a cooling rate of about a million °C/sec. During this process the metal is rapidly quenched as a form of strip with 27±2μm thickness, and the micro-structure of the alloy is the amorphous due to the high quenching rate.

Fe- based amorphous strip has many advantages, such as high permeability, high saturate induction, high electrical resistivity, high density, low core loss and good stability. It can replace the materials of silicon steel, permalloy and ferrite. It is widely used in electronics products that high accuracy and good stability are the most required.



应用领域 Application

- 非晶 C 型、非晶 E 型、非晶块等铁芯  
Amorphous C core, E core, blocked core
- 恒电感铁芯、PFC 电感铁芯  
Constant inductor core, PFC inductor core
- 中频变压器铁芯 / 配电变压器铁芯  
Mid-frequency transformer core, distribution transformer core
- 非晶电磁屏蔽箔片  
Electromagnetic shielding foil
- 非晶粉末铁芯原材料  
Raw materials of amorphous powder core
-

性能指标 Performance Index

| 项目<br>Item                                  | 性能指标(参考值)<br>Performance (Reference) | 项目<br>Item                           | 性能指标(参考值)<br>Performance (Reference) |
|---------------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| 饱和磁感应强度 Bs (T)<br>Saturate Induction        | 1.56                                 | 饱和磁致伸缩系数λs<br>Magnetostriction       | 27×10 <sup>-6</sup>                  |
| 居里温度 Tc (°C)<br>Curie Temperature           | 400                                  | 密度 ρ (g/cm³ )<br>Density             | 7.18                                 |
| 晶化温度 Tx (°C)<br>Crystallization Temperature | 515                                  | 电阻率δ (μΩ•cm)<br>Resistivity          | 130                                  |
| 硬度 Hv<br>Hardness                           | 960                                  | 矫顽力 Hc (A/m)<br>Coercivity           | <4                                   |
| 带材厚度 (μm)<br>Thickness                      | 27±2                                 | 铁芯填充系数 K<br>Core filling coefficient | 0.87                                 |
| 磁导率 μ' @1kHz(Gs/Oe)<br>Permeability         | 245-5000                             | 铁损 P16kHz/37mT (W/kg)<br>Core loss   | 1.0                                  |

|                 |                           |                         |                  |                      |                                  |
|-----------------|---------------------------|-------------------------|------------------|----------------------|----------------------------------|
| 产品规格编码说明        | J                         | 1K101                   | 250              | 27                   | 2                                |
| P/N Description | J- 剪切<br>J-Slitting Strip | 非晶牌号<br>Amorphous Model | 带宽 (mm)<br>Width | 带厚 (μm)<br>Thickness | 厚度公差 (μm)<br>Thickness Tolerance |

产品规格编码说明：J1K101-250-272 铁基非晶 1K101 剪切带，宽度 25.0mm，厚度 27±2μm。

Description: J1K101-250-272, amorphous slitting strip 1K101, width is 25.0mm, thickness is 27±2μm.

常用带材规格宽度 Common Strip Width

|                 |     |     |     |    |    |     |    |    |    |     |     |     |
|-----------------|-----|-----|-----|----|----|-----|----|----|----|-----|-----|-----|
| 带材宽度 Width (mm) | 3.0 | 3.2 | 4.5 | 5  | 6  | 6.5 | 8  | 10 | 15 | 20  | 25  | 30  |
| 带材宽度 Width (mm) | 35  | 40  | 45  | 50 | 55 | 60  | 70 | 80 | 90 | 100 | 110 | 120 |

注 Note:  
1、带材厚度 27±2μm，最宽为 120mm。  
Strip thickness is 27±2μm, Max width is 120mm.  
2、可以根据用户需求，提供其它宽度规格的带材。  
Other customized size strip is available.

3、规范性引用文件：《GB/T 19345.1-2017》非晶、纳米晶合金 第 1 部分：铁基非晶软磁合金带材，非晶牌号 1K101 等同于 GB/T 19345.1-2017 类别 S 型带材。  
Normative reference: 《GB/T 19345.1-2017》Amorphous and Nanocrystalline alloys Part 1: Fe-based amorphous soft magnetic alloy strip.Amorphous grade 1K101 is equivalent to GB/T 19345.1-2017 category S-type strip.

4、1K101 带材等同于日立金属 2605SA-1。  
Strip performance of 1K101 is equivalent to Hitachi 2605SA-1.

钴基非晶带材 1K202  
1K202 Co-based Amorphous Strip



应用领域 Application

- 磁放大器(饱和电感) 铁芯、尖峰抑制器铁芯  
Magnetic amplifier (saturated inductance) , peak suppressor core
- 漏电互感器铁芯、计量互感器铁芯  
Leakage transformer core, metering transformer core
- 传感器铁芯 Current sensor core
- 变压器铁芯 Transformer core

| 项目<br>Item                                  | 性能指标(参考值)<br>Performance (Reference) | 项目<br>Item                           | 性能指标(参考值)<br>Performance (Reference) |
|---------------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| 饱和磁感应强度 Bs (T)<br>Saturate Induction        | 0.55                                 | 饱和磁致伸缩系数λs<br>Magnetostriction       | < 0 .2×10 <sup>-6</sup>              |
| 居里温度 Tc (°C)<br>Curie Temperature           | 255                                  | 密度 ρ (g/cm³ )<br>Density             | 7.6                                  |
| 晶化温度 Tx (°C)<br>Crystallization Temperature | /                                    | 电阻率δ (μΩ•cm)<br>Resistivity          | 140                                  |
| 硬度 Hv<br>Hardness                           | /                                    | 矫顽力 Hc (A/m)<br>Coercivity           | <0.13                                |
| 带材厚度 (μm)<br>Thickness                      | 16 ~ 27                              | 铁芯填充系数 K<br>Core filling coefficient | 0.8                                  |
| 磁导率 μ' @1kHz(Gs/Oe)<br>Permeability         | 60k                                  | 铁损 P16kHz/37mT (W/kg)<br>Core loss   | <65                                  |

|                 |                            |                                      |             |                 |                                |
|-----------------|----------------------------|--------------------------------------|-------------|-----------------|--------------------------------|
| 产品规格编码说明        | J                          | 1k202                                | 038         | 20              | 2                              |
| P/N Description | J- 剪切<br>J- Slitting Strip | 钴基非晶牌号<br>Co-based<br>Amorphous Mode | 带宽<br>Width | 带厚<br>Thickness | 厚度公差<br>Thickness<br>Tolerance |

产品规格编码说明：J1K202-038-202 钴基非晶 1k202，剪切带宽度 3.8mm，厚度 20±2μm。

Description: J1K202-038-202 cobalt-based amorphous slitting strip 1K202, width is 3.8mm, thickness is 20±2μm.

常用钴基带材规格宽度 Common Strip Width

|                 |     |     |     |     |     |     |     |     |     |     |      |    |    |
|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|----|----|
| 带材宽度 Width (mm) | 1.0 | 2.0 | 3.0 | 3.8 | 4.0 | 4.5 | 5.0 | 6.0 | 6.5 | 8.0 | 10.0 | 15 | 20 |
|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|----|----|

常用带材规格说明 Common Specifications

| 产品规格<br>P/N    | 带材宽度 (mm)<br>Width | 带材厚度 (μm)<br>Thickness |
|----------------|--------------------|------------------------|
| J1K202-030-182 | 3.0                | 18±2                   |
| J1K202-030-202 |                    | 20±2                   |
| J1K202-030-232 |                    | 23±2                   |
| J1K202-030-252 |                    | 25±2                   |


注 Note:

1、钴基带材厚度公差 ±2μm，一般最宽为 20mm。  
Strip thickness tolerance is ±2μm, Max width is 20mm.

2、可以根据用户需求，提供其它宽度规格的带材。  
Other customized size strip is available.

3、1K202 带材性能等同于日立金属的 2714A。  
Strip performance of 1K202 is equivalent to Hitachi 2714A.

钴基非晶带材 1K201  
1K201 Co-based Amorphous Strip



应用领域 Application

抗直流互感器铁芯 Anti-DC current transformer core

开关变压器铁芯 Switch transformer core

| 项目<br>Item                                  | 性能指标(参考值)<br>Performance (Reference) | 项目<br>Item                           | 性能指标(参考值)<br>Performance (Reference) |
|---------------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| 饱和磁感应强度 Bs (T)<br>Saturate Induction        | 0.9                                  | 饱和磁致伸缩系数λs<br>Magnetostriction       | < 0 .2×10 <sup>-6</sup>              |
| 居里温度 Tc (°C)<br>Curie Temperature           | 485                                  | 密度 ρ (g/cm³)<br>Density              | 7.6                                  |
| 晶化温度 Tx (°C)<br>Crystallization Temperature | 510                                  | 电阻率δ (μΩ•cm)<br>Resistivity          | 140                                  |
| 硬度 Hv<br>Hardness                           | /                                    | 矫顽力 Hc (A/m)<br>Coercivity           | <1.0                                 |
| 带材厚度 (μm)<br>Thickness                      | 16 ~ 25                              | 铁芯填充系数 K<br>Core filling coefficient | 0.8                                  |
| 磁导率 μ' @1kHz(Gs/Oe)<br>Permeability         | 800 ~ 2500                           | 铁损 P16kHz/37mT (W/kg)<br>Core loss   | /                                    |

|                 |                           |                                       |                          |                 |                                |
|-----------------|---------------------------|---------------------------------------|--------------------------|-----------------|--------------------------------|
| 产品规格编码说明        | J                         | 1K201                                 | 038                      | 20              | 2                              |
| P/N Description | J- 剪切<br>J-Slitting strip | 钴基非晶牌号<br>Co-based<br>Amorphous Model | 带宽<br>Width<br>Thickness | 带厚<br>Thickness | 厚度公差<br>Thickness<br>tolerance |

产品规格编码说明：J1K201-038-202 钴基非晶 1K201，剪切带宽度 3.8mm，厚度 20±2μm。

Description: J1K201-038-202 cobalt-based amorphous slitting strip 1K201, width is 3.8mm, thickness is 20±2μm.

常用钴基带材规格宽度 Common Strip Width

|                 |     |     |     |     |     |     |     |     |     |     |      |      |    |
|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|----|
| 带材宽度 Width (mm) | 1.0 | 2.0 | 3.0 | 3.8 | 4.0 | 4.5 | 5.0 | 6.0 | 6.5 | 8.0 | 10.0 | 15.0 | 20 |
|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|----|

常用带材规格说明 Common Specifications

| 产品规格<br>P/N    | 带材宽度 (mm)<br>Width | 带材厚度 (μm)<br>Thickness |
|----------------|--------------------|------------------------|
| J1K201-030-182 | 3.0                | 18±2                   |
| J1K201-030-202 |                    | 20±2                   |
| J1K201-030-232 |                    | 23±2                   |
| J1K201-030-252 |                    | 25±2                   |

注 Note:

1、钴基带材厚度公差 ±2μm，一般最宽为 20mm;  
Strip thickness tolerance is ±2μm, Max width is 20mm.

2、可以根据用户需求，提供其它宽度规格的带材。  
Other customized size strip is available.

3、1K201 带材性能等同日立金属 2705，VAC 6150。  
Strip performance of 1K201 is equivalent to Hitachi 2705, VAC 6150.

# 铁基纳米晶共模滤波电感铁芯

## Fe-based Nanocrystalline CMC Core

应用领域 Application


- 汽车部件(OBC, DC-DC, 电控, 电池监测, 方向盘电动转向助力, 空调压缩机控制部件等)  
Automotive parts(OBC, DC-DC, electric control, battery monitoring, EPS, AC compressor control components)
- 新能源(光伏逆变器, 风力发电机, 充电桩)  
New energy applications(PV Inverter, wind driven generator, EV charging station)
- 消费电子(平板电视, 空调, 电脑, 游戏机等)  
Consumer Appliance (TV, AC, computer, game machine)
- 医疗器械(核磁共振仪, 呼吸机)  
Medical equipments(MRI machine, ventilator)
- 其他(服务器电源, 不间断电源 UPS, 地铁)  
Other electronics(Server power supply, UPS, subway)



性能特点 Features

|   |                                                               |                                                                                                                                                                             |
|---|---------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | 高 Bs , 高μi 值<br>High Bs, high μi                              | 高 Bs(1.2T) , 高μi 值(>80000) , 具有高的抗饱和能力 , 能有效的降低电感尺寸<br>High Bs (1.2T) , high μi (>80000) , and high anti-saturation ability, that can effectively reduce the core geometry. |
| 2 | 优良的频率特性<br>Excellent frequency                                | 在较宽频率范围内具有出色的磁导率特性<br>Excellent permeability characteristics in a wide frequency range.                                                                                     |
| 3 | 稳定的温度特性<br>Stable temperature characteristic                  | 在 -40℃~150℃温度区间内性能变化率 ±10%<br>The performance change rate is ±10% during temperature -40℃~150℃ .                                                                            |
| 4 | 优良高频阻抗特性<br>Excellent high frequency impedance characteristic | 见 P25 纳米晶共模电感与锰锌铁氧体阻抗性能对比<br>Impedance performance comparison of Nanocrystalline CMC and Mn-Zn ferrite in P25                                                               |
| 5 | 磁滞伸缩系数小 , 噪音低<br>Low magnetostriction coefficient, low noise  | 饱和磁滞伸缩系数接近于零 , λs≈0<br>Saturated magnetostriction coefficient is close to zero, λs≈0                                                                                        |

|                 |                               |                    |               |                                                                                                                                                       |                |
|-----------------|-------------------------------|--------------------|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| 产品规格编码说明        | NC                            | 0001               | L             | W                                                                                                                                                     | 01             |
| P/N Description | 纳米晶铁芯<br>Nanocrystalline Core | 规格序号<br>Serial No. | 低剩磁<br>Low Br | 封装方式 : w- 白色护盒 /b- 黑色护盒<br>c- 喷涂 /t- 不锈钢护盒<br>Encapsulation method: w-white plastic case<br>b-black plastic case, c-coating<br>t-stainless steel case | 特征码<br>Feature |



| 型号<br>P/N                        | 跑道型铁芯尺寸 Oval core dimensions |           |           |           |           |                                  |           |           |           |           | 截面积<br>Cross<br>section<br>area | 磁路<br>长度<br>Magnetic<br>path<br>length | 铁芯<br>重量<br>Weight | 磁导率<br>Permeability ( μ3' at 10 kHz )       |                              | 单匝<br>电感量<br>AL<br>10 kHz<br>nominal<br>μH |
|----------------------------------|------------------------------|-----------|-----------|-----------|-----------|----------------------------------|-----------|-----------|-----------|-----------|---------------------------------|----------------------------------------|--------------------|---------------------------------------------|------------------------------|--------------------------------------------|
|                                  | 铁芯尺寸<br>Bare core dimensions |           |           |           |           | 成品尺寸<br>Finished core dimensions |           |           |           |           |                                 |                                        |                    |                                             |                              |                                            |
|                                  | A<br>(mm)                    | B<br>(mm) | C<br>(mm) | D<br>(mm) | E<br>(mm) | A<br>(mm)                        | B<br>(mm) | C<br>(mm) | D<br>(mm) | E<br>(mm) | Ae<br>(cm²)                     | le<br>(cm)                             | m<br>(g)           | 指定范围值<br>specifi ed value                   | 设计<br>参考值<br>design<br>refer |                                            |
| TSNC-0778-L-b                    | 72.5                         | 44.5      | 58.5      | 30.5      | 15.0      | 77.5                             | 49.5      | 53.5      | 25.5      | 18.5      | 0.82                            | 17.3                                   | 105.0              | 50000 ≤ μ <sub>3</sub> ' ≤ 97000            | 80000                        | 48                                         |
| TSNC-0778-L-b-01                 |                              |           |           |           |           |                                  |           |           |           |           |                                 |                                        |                    | 17850 ≤ μ <sub>3</sub> ' ≤ 34500            | 30000                        | 18                                         |
| TSNC-0778-L-b-02                 |                              |           |           |           |           |                                  |           |           |           |           |                                 |                                        |                    | 11000 ≤μ <sub>3</sub> ' ≤ 23000             | 20000                        | 12                                         |
| TSNC-0778-L-b-03                 |                              |           |           |           |           |                                  |           |           |           |           |                                 |                                        |                    | 2800 ≤μ <sub>3</sub> ' ≤ 5400<br>( 100kHz ) | 4500                         | 2.7                                        |
| TSNC-0800-L-b                    | 88.8                         | 53.3      | 68.0      | 32.5      | 15.0      | 94.0                             | 58.5      | 63.0      | 27.5      | 18.8      | 1.24                            | 20.5                                   | 187.0              | 17850 ≤μ <sub>3</sub> ' ≤ 34500             | 30000                        | 22                                         |
| TSNC-0535-L-b                    | 92.9                         | 41.0      | 80.9      | 29.0      | 15.0      | 96.8                             | 45.0      | 76.8      | 25.0      | 18.0      | 0.70                            | 21.3                                   | 110.0              | 50000 ≤μ <sub>3</sub> ' ≤ 97000             | 80000                        | 28                                         |
| TSNC-0598-L-b<br>( 矩形 rectangle) | 108.8                        | 41.6      | 96.7      | 29.4      | 12.0      | 113.2                            | 46.0      | 91.2      | 24.0      | 16.0      | 0.57                            | 25.8                                   | 109.0              | 45000 ≤μ <sub>3</sub> ' ≤ 95000             | 80000                        | 18                                         |


| 型号<br>P/N       | 环形铁芯尺寸<br>Toroidal core dimensions                  |                                                          | 截面积<br>Cross section area | 磁路长度<br>Magnetic path length | 铁芯重量<br>Weight | 磁导率<br>Permeability ( μ3' at 10kHz) |                       | 单匝电感量<br>AL<br>Nominal<br>μ H |        |
|-----------------|-----------------------------------------------------|----------------------------------------------------------|---------------------------|------------------------------|----------------|-------------------------------------|-----------------------|-------------------------------|--------|
|                 | 铁芯尺寸<br>Bare core dimensions<br>OD * ID * H<br>(mm) | 成品尺寸<br>Finished core dimensions<br>OD * ID * H<br>( mm) |                           |                              |                | 指定范围值<br>Specifi edvalue            | 设计参考值<br>Design refer | 10kHz                         | 100kHz |
|                 |                                                     |                                                          | Ae<br>(cm²)               | le<br>(cm)                   | m<br>(g)       |                                     |                       |                               |        |
| NC-0178-L-w     | 9.8*6.5*4.5                                         | 11.2*4.9*5.9                                             | 0.06                      | 2.6                          | 1.1            | 65600≤μ3 ' ≤127000                  | 87000                 | 25.5                          | 6.4    |
| NC-0010-L-w-03  | 12*8*5                                              | 13.8*6.7*6.4                                             | 0.07                      | 3.1                          | 1.7            | 72000≤μ3 ' ≤139000                  | 97000                 | 30                            | 6.5    |
| NC-0226-L-w     | 12.5*10*5                                           | 14.6*8.2*6.8                                             | 0.05                      | 3.5                          | 1.3            | 42200≤μ3 ' ≤81500                   | 56000                 | 10.0                          | 3.6    |
| NC-0039-L-w     | 15*10*5                                             | 17.0*8.2*6.7                                             | 0.09                      | 3.9                          | 2.6            | 72000≤μ3 ' ≤139000                  | 94000                 | 27.0                          | 6.7    |
| NC-0217-L-w     | 16*10*6                                             | 17.9*8.1*8.1                                             | 0.14                      | 4.1                          | 4              | 72000≤μ3 ' ≤135000                  | 97000                 | 43.0                          | 10.1   |
| NC-0217-L-w-01  |                                                     |                                                          |                           |                              | 4              | 18000≤μ3 ' ≤35000                   | 23700                 | 11.7                          | 6.5    |
| NC-0179-L-w     | 17.5*12.6*6                                         | 19.0*10.8*8.0                                            | 0.12                      | 4.7                          | 4.1            | 72000≤μ3 ' ≤135000                  | 96000                 | 30.0                          | 6.9    |
| NC-0044-L-w-01  | 19*15*10                                            | 21.1*13.3*12.1                                           | 0.16                      | 5.3                          | 6.3            | 72000≤μ3 ' ≤130000                  | 96000                 | 36.1                          | 8.8    |
| NC-0038-L-w-21  | 20*12.5*8                                           | 21.8*10.9*9.8                                            | 0.24                      | 5.1                          | 9              | 72000≤μ3 ' ≤135000                  | 97000                 | 55.2                          | 13.6   |
| NC-0038-L-w-01  |                                                     |                                                          |                           |                              | 9              | 18100≤μ3 ' ≤35000                   | 23700                 | 14.3                          | 9.1    |
| NC-0007-L-w     | 20*12*10                                            | 22.6*10.4*12.3                                           | 0.32                      | 5.0                          | 11.6           | 63000≤μ3 ' ≤122000                  | 85000                 | 68                            | 16.8   |
| NC-0007-L-w-01  |                                                     |                                                          |                           |                              |                | 14300≤μ3 ' ≤30000                   | 20000                 | 16                            | 13.6   |
| NC-0056-L-HF-02 | 22*17*10                                            | 24.5*15.2*12.5                                           | 0.20                      | 6.1                          | 8.8            | 66000≤μ3 ' ≤129000                  | 90000                 | 35.6                          | 8.5    |
| NC-0089-L-w-06  | 28*18*10                                            | 30.5*15.9*12.4                                           | 0.40                      | 7.2                          | 21             | 55000≤μ3 ' ≤122000                  | 106000                | 55                            | 15     |
| NC-0088-L-w-03  | 25*20*10                                            | 27.5*17.2*12.3                                           | 0.20                      | 7.1                          | 10.4           | 60000≤μ3 ' ≤116000                  | 80000                 | 28.4                          | 7.3    |
| NC-0141-L-w-18  | 25*16*10                                            | 27.5*13.8*12.5                                           | 0.36                      | 6.4                          | 17             | 72000≤μ3 ' ≤135000                  | 95000                 | 65.6                          | 15.5   |
| NC-0141-L-w-02  |                                                     |                                                          |                           |                              | 17             | 15000≤μ3 ' ≤35000                   | 24300                 | 17.0                          | 11.5   |
| NC-0141-L-w-04  |                                                     |                                                          |                           |                              | 17             | 3300≤μ3 ' ≤6400(100kHz)             | 4400                  | 3.2                           | 3.1    |

| 型号<br>P/N      | 环形铁芯尺寸<br>Core dimensions                           |                                                         | 截面积<br>Cross section area | 磁路长度<br>Magnetic path length | 铁芯重量<br>Weight | 磁导率<br>Permeability ( $\mu_3$ ' at 10kHz) |                       | 单匝电感量<br>AL<br>Nominal $\mu$ H |        |
|----------------|-----------------------------------------------------|---------------------------------------------------------|---------------------------|------------------------------|----------------|-------------------------------------------|-----------------------|--------------------------------|--------|
|                | 铁芯尺寸<br>Bare core dimensions<br>OD * ID * H<br>(mm) | 成品尺寸<br>Finished core dimensions<br>OD * ID * H<br>(mm) |                           |                              |                | 指定范围值<br>Specifi edvalue                  | 设计参考值<br>Design refer | 10kHz                          | 100kHz |
|                |                                                     |                                                         | Ae<br>(cm <sup>2</sup> )  | le<br>(cm)                   | m<br>(g)       |                                           |                       |                                |        |
| NC-0008-L-w-01 | 30*20*10                                            | 33.2*17.7*13.3                                          | 0.40                      | 7.9                          | 23             | 72000 $\leq\mu_3$ ' $\leq$ 135000         | 103000                | 59.3                           | 14.0   |
| NC-0008-L-w-14 |                                                     |                                                         |                           |                              | 23             | 19500 $\leq\mu_3$ ' $\leq$ 35200          | 25500                 | 15.5                           | 11.1   |
| NC-0008-L-w-11 |                                                     |                                                         |                           |                              | 23             | 3280 $\leq\mu_3$ ' $\leq$ 6400(100kHz)    | 4400                  | 2.9                            | 2.8    |
| NC-0058-L-b    | 30*20*15                                            | 33.5*17.7*17.8                                          | 0.57                      | 7.9                          | 33             | 72000 $\leq\mu_3$ ' $\leq$ 135000         | 96000                 | 88.0                           | 20.0   |
| NC-0071-L-y    | 30*20*20                                            | 33.3*17.9*24.0                                          | 0.80                      | 7.9                          | 45             | 64500 $\leq\mu_3$ ' $\leq$ 125000         | 95000                 | 118.5                          | 30.0   |
| NC-0014-L-b-07 | 32*20*15                                            | 34.6*17.9*17.9                                          | 0.70                      | 8                            | 42             | 66000 $\leq\mu_3$ ' $\leq$ 128000         | 90000                 | 97                             | 23     |
| NC-0187-L-w-04 | 33*23*15                                            | 35.7*21.1*17.9                                          | 0.58                      | 8.79                         | 38             | 58000 $\leq\mu_3$ ' $\leq$ 116000         | 80000                 | 66.8                           | 18.3   |
| NC-0893-L-w    | 33*22*20                                            | 36.2*19*23.8                                            | 0.83                      | 8.6                          | 55             | $\mu_3$ ' $\geq$ 68000                    | 90000                 | 112.3                          | 27.4   |
| NC-0175-L-b-01 | 37.8*24.2*15                                        | 40.7*21.7*18.2                                          | 0.76                      | 9.4                          | 56             | 72000 $\leq\mu_3$ ' $\leq$ 135000         | 94000                 | 96.4                           | 22.5   |
| NC-0015-L-w-03 | 40*32*15                                            | 44.7*28.8*18.7                                          | 0.46                      | 11.3                         | 38             | 72000 $\leq\mu_3$ ' $\leq$ 135000         | 9500                  | 47.2                           | 11.1   |
| NC-0015-L-w-04 |                                                     |                                                         |                           |                              | 38             | 15000 $\leq\mu_3$ ' $\leq$ 29000          | 20000                 | 12.2                           | 7.9    |
| NC-0015-L-w-10 |                                                     |                                                         |                           |                              | 38             | 3160 $\leq\mu_3$ ' $\leq$ 6300(100kHz)    | 4300                  | 2.3                            | 2.2    |
| NC-0023-L-b-02 | 40*25*15                                            | 43.7*21.7*18.8                                          | 0.86                      | 10.2                         | 64             | 72000 $\leq\mu_3$ ' $\leq$ 135000         | 94000                 | 101.0                          | 23.1   |
| NC-0023-L-b-22 |                                                     |                                                         |                           |                              | 64             | 17850 $\leq\mu_3$ ' $\leq$ 34500          | 23700                 | 25.4                           | 17.2   |
| NC-0003-L-b-01 | 40*25*20                                            | 44.7*21.6*24.6                                          | 1.17                      | 10.2                         | 86             | 50000 $\leq\mu_3$ ' $\leq$ 95600          | 66000                 | 95                             | 28     |
| NC-0177-L-b    | 45*30*15                                            | 47.5*27.5*17.8                                          | 0.86                      | 11.8                         | 74             | 72000 $\leq\mu_3$ ' $\leq$ 135000         | 96000                 | 87.5                           | 20.3   |
| NC-0177-L-s-01 |                                                     |                                                         |                           |                              | 74             | 20000 $\leq\mu_3$ ' $\leq$ 38700          | 26700                 | 24.3                           | 15.9   |
| NC-0177-L-b-02 |                                                     |                                                         |                           |                              | 74             | 12900 $\leq\mu_3$ ' $\leq$ 25000          | 17200                 | 15.7                           | 14.3   |
| NC-0070-L-b-03 | 46*27*20                                            | 48.7*24.6*22.3                                          | 1.44                      | 11.5                         | 120            | $\mu_3$ ' $\geq$ 50000                    | 80000                 | 130                            | 32     |
| NC-0078-L-b-04 | 46*27*25                                            | 48.7*24.6*28.3                                          | 1.85                      | 11.5                         | 157            | $\mu_3$ ' $\geq$ 60000                    | 80000                 | 160                            | 39     |


| 型号<br>P/N      | 环形铁芯尺寸<br>Core dimensions                           |                                                         | 截面积<br>Cross section area | 磁路长度<br>Magnetic path length | 铁芯重量<br>Weight | 磁导率<br>Permeability ( $\mu_3$ ' at 10kHz) |                       | 单匝电感量<br>AL<br>Nominal $\mu$ H |        |
|----------------|-----------------------------------------------------|---------------------------------------------------------|---------------------------|------------------------------|----------------|-------------------------------------------|-----------------------|--------------------------------|--------|
|                | 铁芯尺寸<br>Bare core dimensions<br>OD * ID * H<br>(mm) | 成品尺寸<br>Finished core dimensions<br>OD * ID * H<br>(mm) |                           |                              |                | 指定范围值<br>Specifi edvalue                  | 设计参考值<br>Design refer | 10kHz                          | 100kHz |
|                |                                                     |                                                         | Ae<br>(cm )               | le<br>(cm)                   | m<br>(g)       |                                           |                       |                                |        |
| NC-0016-L-w-05 | 50*40*20                                            | 53.5*36.9*23.0                                          | 0.76                      | 14.1                         | 79             | 50000 $\leq\mu_3$ ' $\leq$ 97000          | 66000                 | 45.3                           | 14.0   |
| NC-0016-L-w-08 |                                                     |                                                         |                           |                              | 79             | 20000 $\leq\mu_3$ ' $\leq$ 38700          | 26600                 | 18.0                           | 10.0   |
| NC-0837-L-b    | 54*40*18                                            | 57.1*36.7*21.7                                          | 1.00                      | 14.7                         | 107            | 72000 $\leq\mu_3$ ' $\leq$ 139000         | 97000                 | 81.1                           | 19.2   |
| NC-0017-L-b    | 63*50*25                                            | 67.3*46.5*28.4                                          | 1.24                      | 17.8                         | 161            | 50000 $\leq\mu_3$ ' $\leq$ 97000          | 67000                 | 58.6                           | 18.1   |
| NC-0017-L-b-01 |                                                     |                                                         |                           |                              | 161            | 20000 $\leq\mu_3$ ' $\leq$ 38700          | 26500                 | 23.3                           | 13.5   |
| NC-0017-L-b-02 |                                                     |                                                         |                           |                              | 161            | 2850 $\leq\mu_3$ ' $\leq$ 5510(100kHz)    | 3700                  | 3.3                            | 3.2    |
| NC-0147-L-b    | 80*50*20                                            | 84.0*46.7*25.0                                          | 2.28                      | 20.4                         | 342            | 71250 $\leq\mu_3$ ' $\leq$ 137000         | 95000                 | 94.0                           | 28.0   |
| NC-0147-L-b-02 |                                                     |                                                         |                           |                              | 342            | 18700 $\leq\mu_3$ ' $\leq$ 36300          | 24900                 | 35.0                           | 24.0   |
| NC-0147-L-b-04 |                                                     |                                                         |                           |                              | 342            | $\mu_3$ ' $\geq$ 5170                     | 5170                  | 9.6                            | 9.2    |
| NC-0121-L-b    | 80*50*25                                            | 83.7*47.3*29.0                                          | 2.93                      | 20.4                         | 430            | $\mu_3$ ' $\geq$ 55000                    | 80000                 | 144.0                          | 36.0   |
| NC-0096-L-b-01 | 90*60*20                                            | 94.0*55.2*24.0                                          | 2.28                      | 23.6                         | 395            | 50000 $\leq\mu_3$ ' $\leq$ 97000          | 67000                 | 81.0                           | 25.1   |
| NC-0096-L-b-02 |                                                     |                                                         |                           |                              | 400            | 2800 $\leq\mu_3$ ' $\leq$ 5400(100kHz)    | 3700                  | 4.6                            | 4.5    |
| NC-0188-L-w    | 100*80*25                                           | 107.6*70.2*30.6                                         | 1.90                      | 28.3                         | 379            | 50000 $\leq\mu_3$ ' $\leq$ 97000          | 67000                 | 56.3                           | 16.9   |
| NC-0188-L-w-01 |                                                     |                                                         |                           |                              | 379            | 12900 $\leq\mu_3$ ' $\leq$ 25000          | 17200                 | 14.5                           | 13.1   |
| NC-0144-L-b    | 102*76*25                                           | 108.0*70.0*30.0                                         | 2.47                      | 28.0                         | 508            | 50000 $\leq\mu_3$ ' $\leq$ 97000          | 67000                 | 68.8                           | 21.6   |
| NC-0144-L-b-02 |                                                     |                                                         |                           |                              | 508            | 12900 $\leq\mu_3$ ' $\leq$ 25000          | 17200                 | 19.1                           | 17.2   |
| NC-0144-L-b-01 |                                                     |                                                         |                           |                              | 515            | 2840 $\leq\mu_3$ ' $\leq$ 5480(100kHz)    | 3800                  | 4.3                            | 4.2    |
| NC-0176-L-b    | 120*85*25                                           | 125.9*79.9*30.3                                         | 0.86                      | 11.8                         | 810            | $\mu_3$ ' $\geq$ 60000                    | 80000                 | 120.0                          | 27.0   |
| NC-0176-L-b-01 |                                                     |                                                         |                           |                              |                | 12900 $\leq\mu_3$ ' $\leq$ 25000          | 17200                 | 23                             | 21     |
| NC-0032-L-b-03 | 160*130*25                                          | 165.0*125.0*30.0                                        | 2.74                      | 45.6                         | 917            | 27600 $\leq\mu_3$ ' $\leq$ 59590          | 36000                 | 26.8                           | 13.7   |
| NC-0032-L-b-02 |                                                     |                                                         | 2.74                      | 45.6                         | 917            | 20000 $\leq\mu_3$ ' $\leq$ 38700          | 26500                 | 20.1                           | 13.1   |
| NC-0032-L-b    |                                                     |                                                         | 2.74                      | 45.6                         | 917            | 12900 $\leq\mu_3$ ' $\leq$ 25000          | 17200                 | 12.9                           | 11.7   |
| NC-0032-L-b-04 |                                                     |                                                         | 2.85                      | 45.6                         | 967            | 2800 $\leq\mu_3$ ' $\leq$ 5400(100kHz)    | 3700                  | 3.0                            | 2.9    |

备注：\*表中性能仅供客户初步设计选型用，具体性能参数以承认书为准。      \*可根据客户要求制作各种环形、矩形、钳表形及其它形状的铁芯。  
\* The provided data is for customer's initial design guidelines only, please check the approval data sheet before ordering.    \* Toroidal, Oval, Clamp Shape or other customized designs are available.


性能曲线 Performance Curve

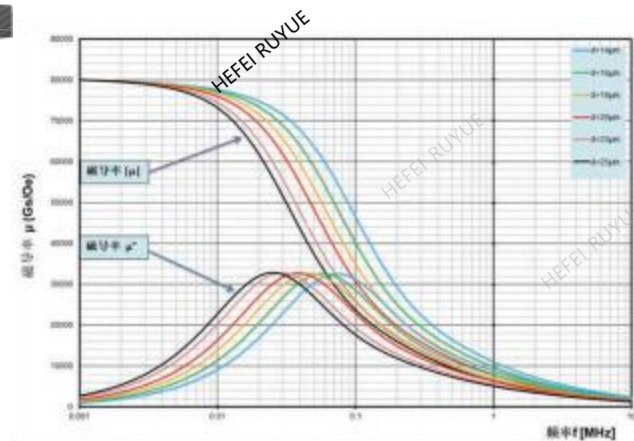

图一： 1K107B 8 万磁导率  $|\mu|$ ，材料厚度 VS 频率特性曲线  
Fig.1 Material Thickness and Permeability  $|\mu|$  VS Frequency of 1K107B Nanocrystalline (Fe-based)

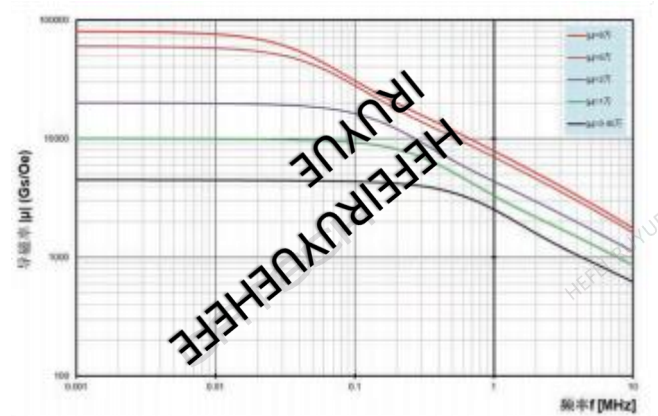


图二： 铁基纳米晶磁导率  $|\mu|$  VS 频率特性曲线  
Fig.2 Permeability  $|\mu|$  VS Frequency of Nanocrystalline (Fe-based)

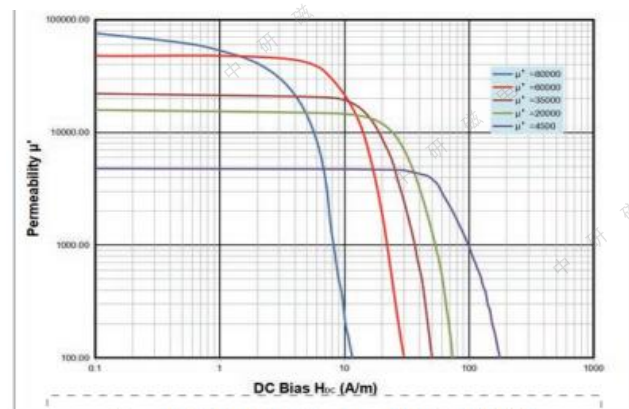


图三： 铁基纳米晶磁导率  $\mu'$  VS 直流偏置特性曲线  
Fig.3 Permeability  $\mu'$  VS DC Bias of Nanocrystalline (Fe-based)


性能曲线 Performance Curve

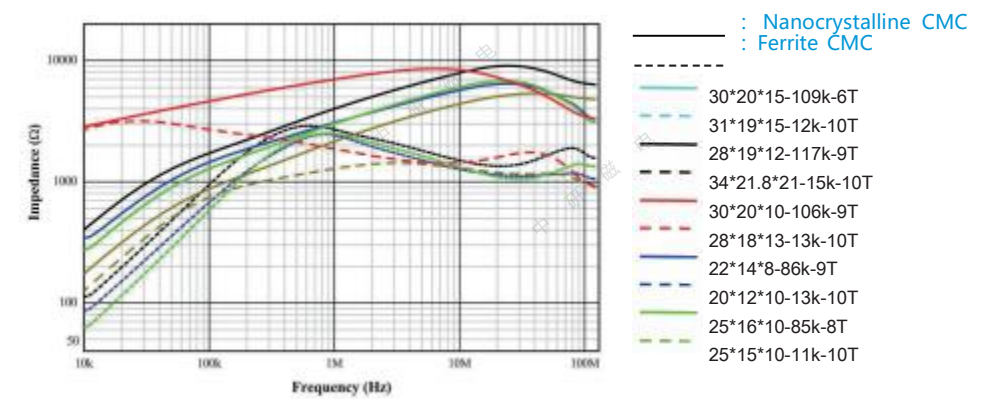

图四： 纳米晶共模电感与锰锌铁氧体的阻抗性能对比  
Fig.4 Comparison of Impedance of Nanocrystalline CMC and Ferrite CMC

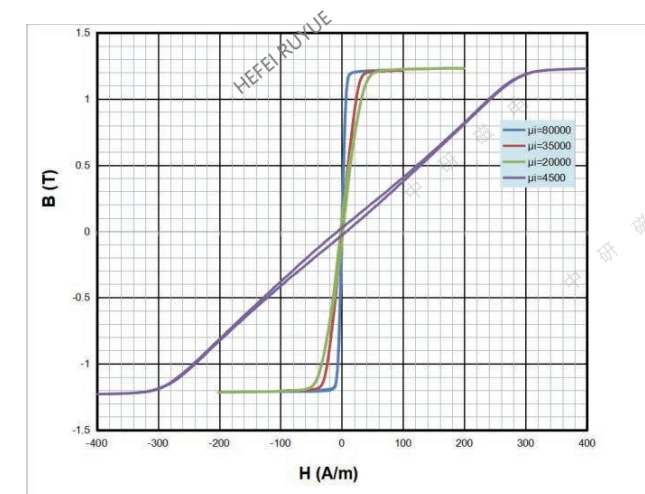

图五： 不同类型磁导率磁滞回线  
Fig.5 Magnetic Hysteresis Loop for Different Permeability

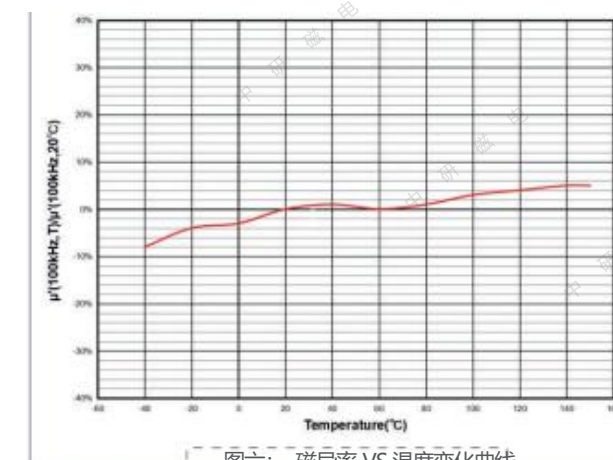

图六： 磁导率 VS 温度变化曲线  
Fig.6 Permeability VS Temperature Variation Curve

铁基非晶C型铁芯
Fe-based Amorphous C-Core

应用领域 Application

- 光伏逆变器用非晶电抗器
Reactor core for PV inverter
- 高频大功率开关电源中的输出滤波电抗器
Filter reactor of high frequency high power switching power supply
- 中高频开关电源变压器
Med-high frequency switching power supply
- 不间断电源中的主变压器
Major transformer of UPS power supply

性能特点 Features

- 高饱和磁感应强度 - 减小铁芯体积
High saturate induction intensity-reduce core volume
- 矩形切割结构 - 便于线圈的装配
Rectangular cutting structure-easy to assemble the coil
- 铁芯分段式 - 优良的抗直流偏置饱和和能力
Magnetic core segmentation-excellent resistance to DC bias saturation
- 低损耗 - 减小温升(16kHz, 37mT P≤1.0 W/kg)
Low loss-reduce temperature rise
- 良好的稳定性 - 可在 -40~130℃长时间工作
Good stability-stable work at -40~130℃
- 磁导率：1000-1500 Gs/Oe
Permeability: 1000-1500 Gs/Oe

Table with 4 columns: Product specification code description, CA, CC, 100. Row 1: P/N Description, 磁电, C型铁芯 C-Core, 规格序列号 Serial No.

a- 铁芯叠厚 b- 铁芯窗宽 c- 铁芯窗高 d- 铁芯高度
e- 铁芯宽度 f- 铁芯长度 Le- 磁路长度 Ae- 铁芯有效截面积
Aw- 铁芯窗口面积 Weight- 重量
a-core build b-window width c-window height d-core height
e-core width f-core length Le-length of magnetic path
Ae-Effective cross section area Aw-window area Weight-Weight in Grams

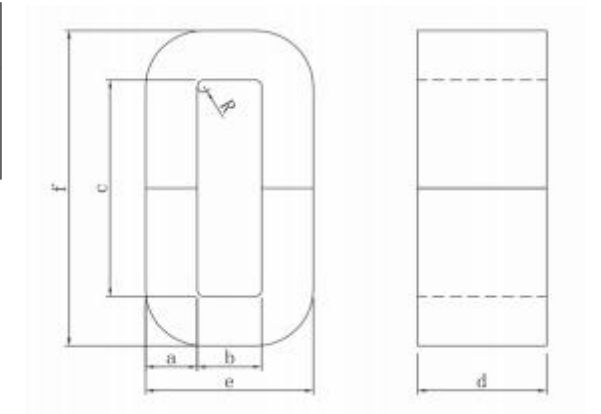


Table with 15 columns: Model P/N, Core build (mm), Window width (mm) ref, Window length (mm) ref, Core height (mm), Core width (mm), Core length (mm), R angle, Magnetic path length (cm), Effective cross section area (cm²), Window area (cm²), Weight (g). Rows include CACC-0.9, CACC-4, and CACC-4B.


Table with 15 columns: Model, a, b, c, d, e, f, g, h, i, j, k, l, m, n, o. Rows include CACC-6.3, CACC-8, CACC-10, CACC-12, CACC-16A, CACC-16B, CACC-20, CACC-20B, CACC-20C, CACC-20D, CACC-20E, CACC-21, CACC-21B, CACC-25, CACC-25B, CACC-26, CACC-26B, CACC-30, CACC-32, CACC-32C, CACC-32D, CACC-32E, CACC-33, CACC-34, CACC-35, CACC-39, CACC-40, CACC-40B, CACC-40C, CACC-40D, CACC-50, CACC-50B, CACC-60, CACC-60B, CACC-62, CACC-62B, CACC-63, CACC-63B, CACC-64, CACC-64B, and CACC-65.

| 型号 P/N          | 叠厚<br>Core build (mm) |     | 窗口宽度<br>Window width (mm)<br>ref | 窗口长度<br>Window length (mm)<br>ref | 铁芯高度<br>Core height (mm) |     | 铁芯宽度<br>Core width (mm) |   | 铁芯长度<br>Core length (mm) |   | 内圆角<br>R angle | 磁路长度<br>Magnetic path length (cm) | 有效截面积<br>Eff ective cross section area( cm <sup>2</sup> ) | 窗口面积<br>Window area | 重量<br>Weight (g) |
|-----------------|-----------------------|-----|----------------------------------|-----------------------------------|--------------------------|-----|-------------------------|---|--------------------------|---|----------------|-----------------------------------|-----------------------------------------------------------|---------------------|------------------|
|                 | a                     | ±   | b                                | c                                 | d                        | ±   | e                       | ± | f                        | ± | R              | Le                                | Ae                                                        | Aw                  | m                |
| CACC-66         | 15                    | 0.8 | 29                               | 60                                | 40                       | 1   | 59                      | 1 | 90                       | 2 | 2              | 22.17                             | 5.34                                                      | 17.40               | 850              |
| CACC-66B        | 14.4                  | 0.8 | 51.2                             | 82                                | 30                       | 0.5 | 80                      | 1 | 110.8                    | 3 | 2              | 30.82                             | 3.84                                                      | 41.98               | 851              |
| CACC-70         | 20                    | 1   | 40                               | 60                                | 30                       | 0.5 | 80                      | 1 | 100                      | 3 | 2              | 25.94                             | 5.34                                                      | 24.00               | 995              |
| CACC-70B        | 10.5                  | 0.8 | 15                               | 125                               | 40                       | 1   | 36                      | 1 | 146                      | 3 | 3              | 30.78                             | 3.74                                                      | 18.75               | 826              |
| CACC-71         | 14.4                  | 0.8 | 31.2                             | 62                                | 30                       | 0.5 | 60                      | 1 | 90.8                     | 2 | 2              | 22.82                             | 3.84                                                      | 19.34               | 630              |
| CACC-74         | 20                    | 1   | 26                               | 63                                | 30                       | 0.5 | 66                      | 1 | 103                      | 3 | 2              | 23.74                             | 5.34                                                      | 16.38               | 910              |
| CACC-75         | 20                    | 1   | 20                               | 85                                | 25                       | 0.5 | 60                      | 1 | 125                      | 3 | 2              | 26.94                             | 4.45                                                      | 17.00               | 861              |
| CACC-76         | 12                    | 0.8 | 45                               | 105                               | 15                       | 0.5 | 69                      | 1 | 129                      | 3 | 2              | 33.43                             | 1.60                                                      | 47.25               | 384              |
| CACC-80         | 16                    | 1   | 20                               | 70                                | 40                       | 1   | 52                      | 1 | 102                      | 3 | 2              | 22.68                             | 5.70                                                      | 14.00               | 928              |
| CACC-80B        | 16                    | 1   | 21                               | 73                                | 40                       | 1   | 53                      | 1 | 105                      | 3 | 2              | 23.48                             | 5.70                                                      | 15.33               | 960              |
| CACC-84         | 12                    | 0.8 | 30                               | 60                                | 20                       | 0.5 | 54                      | 1 | 84                       | 2 | 2              | 21.43                             | 2.14                                                      | 18.00               | 329              |
| CACC-100        | 16                    | 1   | 20                               | 70                                | 45                       | 1   | 52                      | 1 | 102                      | 3 | 2              | 22.68                             | 6.41                                                      | 14.00               | 1044             |
| CACC-100B       | 16                    | 1   | 21                               | 73                                | 45                       | 1   | 53                      | 1 | 105                      | 3 | 2              | 23.48                             | 6.41                                                      | 15.33               | 1080             |
| CACC-100C       | 16                    | 1   | 21.5                             | 70                                | 45                       | 1   | 53.5                    | 1 | 102                      | 3 | 2              | 22.98                             | 6.41                                                      | 15.05               | 1057             |
| CACC-110        | 16                    | 1   | 25                               | 75                                | 45                       | 1   | 57                      | 1 | 107                      | 3 | 2              | 24.68                             | 6.41                                                      | 18.75               | 1136             |
| CACC-117        | 20                    | 1   | 35                               | 77                                | 20                       | 0.5 | 75                      | 1 | 117                      | 3 | 2              | 28.34                             | 3.56                                                      | 26.95               | 724              |
| CACC-117B-3CUT  | 15.5                  | 0.8 | 20                               | 75                                | 55                       | 1   | 51                      | 1 | 106                      | 3 | 2              | 23.53                             | 7.59                                                      | 15.00               | 1282             |
| CACC-119        | 16                    | 1   | 20                               | 70                                | 60                       | 1   | 52                      | 1 | 102                      | 3 | 2              | 22.68                             | 8.54                                                      | 14.00               | 1392             |
| CACC-121-3CUT   | 15                    | 0.8 | 22                               | 75                                | 55                       | 1   | 52                      | 1 | 105                      | 3 | 2              | 23.77                             | 7.34                                                      | 16.50               | 1253             |
| CACC-125        | 19                    | 1   | 25                               | 83                                | 35                       | 1   | 63                      | 1 | 121                      | 3 | 2              | 27.23                             | 5.92                                                      | 20.75               | 1157             |
| CACC-127        | 20                    | 1   | 30                               | 60                                | 40                       | 1   | 70                      | 1 | 100                      | 3 | 2              | 23.94                             | 7.12                                                      | 18.00               | 1224             |
| CACC-128        | 22                    | 1   | 35                               | 84                                | 25                       | 0.5 | 79                      | 1 | 128                      | 3 | 2              | 30.37                             | 4.90                                                      | 29.40               | 1067             |
| CACC-131        | 20                    | 1   | 35                               | 105                               | 20                       | 0.5 | 75                      | 1 | 145                      | 3 | 2              | 33.94                             | 3.56                                                      | 36.75               | 868              |
| CACC-135        | 20                    | 1   | 40                               | 92                                | 30                       | 0.5 | 80                      | 1 | 132                      | 3 | 3              | 32.17                             | 5.34                                                      | 36.80               | 1233             |
| CACC-137        | 10.5                  | 0.8 | 35                               | 105                               | 40                       | 1   | 56                      | 1 | 126                      | 3 | 2              | 30.96                             | 3.74                                                      | 36.75               | 831              |
| CACC-140        | 26                    | 1   | 45                               | 88                                | 30                       | 0.5 | 97                      | 1 | 140                      | 3 | 3              | 34.25                             | 6.94                                                      | 39.60               | 1707             |
| CACC-140A       | 26                    | 1   | 45                               | 88                                | 40                       | 1   | 97                      | 1 | 140                      | 3 | 3              | 34.25                             | 9.26                                                      | 39.60               | 2276             |
| CACC-157-3CUT   | 20                    | 1   | 20                               | 80                                | 55                       | 1   | 60                      | 1 | 120                      | 3 | 2              | 25.94                             | 9.79                                                      | 16.00               | 1823             |
| CACC-160        | 19                    | 1   | 25                               | 83                                | 40                       | 1   | 63                      | 1 | 121                      | 3 | 2              | 27.23                             | 6.76                                                      | 20.75               | 1322             |
| CACC-P160A-2CUT | 19                    | 1   | 25                               | 72                                | 40                       | 1   | 63                      | 1 | 110                      | 3 | 2              | 25.03                             | 6.76                                                      | 18.00               | 1215             |
| CACC-168S       | 20.4                  | 1   | 30                               | 154.2                             | 20                       | 0.5 | 70.8                    | 1 | 195                      | 3 | 2              | 42.91                             | 3.63                                                      | 46.26               | 1119             |
| CACC-169-3CUT   | 20                    | 1   | 21                               | 82                                | 55                       | 1   | 61                      | 1 | 122                      | 3 | 2              | 26.54                             | 9.79                                                      | 17.22               | 1866             |
| CACC-170        | 16.5                  | 1   | 40                               | 72                                | 40                       | 1   | 73                      | 1 | 105                      | 3 | 3              | 27.07                             | 5.87                                                      | 28.80               | 1142             |
| CACC-180        | 25                    | 1   | 35                               | 65                                | 30                       | 0.5 | 85                      | 1 | 115                      | 3 | 2              | 27.51                             | 6.68                                                      | 22.75               | 1318             |
| CACC-193        | 40                    | 1.5 | 50                               | 113                               | 40                       | 1   | 130                     | 2 | 193                      | 3 | 4              | 44.48                             | 14.24                                                     | 56.50               | 4548             |
| CACC-200        | 19                    | 1   | 25                               | 83                                | 50                       | 1   | 63                      | 1 | 121                      | 3 | 2              | 27.23                             | 8.46                                                      | 20.75               | 1653             |
| CACC-200A-2CUT  | 20                    | 1   | 25                               | 82                                | 50                       | 1   | 65                      | 1 | 122                      | 3 | 2              | 27.34                             | 8.90                                                      | 20.50               | 1747             |
| CACC-200B       | 14                    | 0.8 | 35                               | 93                                | 68.3                     | 1   | 63                      | 1 | 121                      | 3 | 2              | 29.65                             | 8.51                                                      | 32.55               | 1812             |
| CACC-210        | 40                    | 1.5 | 50                               | 130                               | 50                       | 1   | 130                     | 2 | 210                      | 3 | 4              | 47.88                             | 17.80                                                     | 65.00               | 6119             |
| CACC-245        | 16.5                  | 1   | 38                               | 74                                | 60                       | 1   | 71                      | 1 | 107                      | 3 | 2              | 27.24                             | 8.81                                                      | 28.12               | 1723             |
| CACC-250        | 19                    | 1   | 25                               | 90                                | 60                       | 1   | 63                      | 1 | 128                      | 3 | 2              | 28.63                             | 10.15                                                     | 22.50               | 2085             |
| CACC-270        | 20                    | 1   | 30                               | 70                                | 60                       | 1   | 70                      | 1 | 110                      | 3 | 2              | 25.94                             | 10.68                                                     | 21.00               | 1989             |
| CACC-275        | 25                    | 1   | 35                               | 78                                | 50                       | 1   | 85                      | 1 | 128                      | 3 | 2              | 30.11                             | 11.13                                                     | 27.30               | 2405             |
| CACC-276        | 21                    | 1   | 35                               | 105                               | 40                       | 1   | 77                      | 1 | 147                      | 3 | 2              | 34.25                             | 7.48                                                      | 36.75               | 1839             |


| 型号<br>P/N  | 叠厚<br>Core build (mm) |     | 窗口宽度<br>Window width (mm)<br>ref | 窗口长度<br>Window length (mm)<br>ref | 铁芯高度<br>Core height (mm) |     | 铁芯宽度<br>Core width (mm) |   | 铁芯长度<br>Core length (mm) |   | 内圆角<br>R angle | 磁路长度<br>Magnetic path length (cm) | 有效截面积<br>Eff ective cross section area( cm <sup>2</sup> ) | 窗口面积<br>Window area | 重量<br>Weight (g) |
|------------|-----------------------|-----|----------------------------------|-----------------------------------|--------------------------|-----|-------------------------|---|--------------------------|---|----------------|-----------------------------------|-----------------------------------------------------------|---------------------|------------------|
|            | a                     | ±   | b                                | c                                 | d                        | ±   | e                       | ± | f                        | ± | R              | Le                                | Ae                                                        | Aw                  | m                |
| CACC-276B  | 13                    | 1   | 35                               | 105                               | 65                       | 1   | 61                      | 1 | 131                      | 3 | 2              | 31.74                             | 7.52                                                      | 36.75               | 1714             |
| CACC-320   | 22                    | 1   | 35                               | 85                                | 50                       | 1   | 79                      | 1 | 129                      | 3 | 3              | 30.40                             | 9.79                                                      | 29.75               | 2137             |
| CACC-320B  | 22                    | 1   | 35                               | 105                               | 50                       | 1   | 79                      | 1 | 149                      | 3 | 3              | 34.40                             | 9.79                                                      | 36.75               | 2418             |
| CACC-327   | 25                    | 1   | 35                               | 105                               | 40                       | 1   | 85                      | 1 | 155                      | 3 | 2              | 35.51                             | 8.90                                                      | 36.75               | 2269             |
| CACC-367S  | 25.8                  | 1   | 67                               | 97.8                              | 25                       | 0.5 | 118.6                   | 2 | 149.4                    | 3 | 3              | 40.55                             | 5.74                                                      | 65.53               | 1671             |
| CACC-385   | 20                    | 1   | 35                               | 90.5                              | 70                       | 1   | 75                      | 1 | 130.5                    | 3 | 3              | 30.87                             | 12.46                                                     | 31.68               | 2762             |
| CACC-400   | 22                    | 1   | 35                               | 85                                | 65                       | 1   | 79                      | 1 | 129                      | 3 | 3              | 30.40                             | 12.73                                                     | 29.75               | 2778             |
| CACC-455   | 17                    | 1   | 40                               | 84                                | 90                       | 1.5 | 74                      | 1 | 118                      | 3 | 2              | 29.80                             | 13.62                                                     | 33.60               | 2913             |
| CACC-465   | 25                    | 1   | 40                               | 105                               | 50                       | 1   | 90                      | 1 | 155                      | 3 | 3              | 36.34                             | 11.13                                                     | 42.00               | 2903             |
| CACC-500   | 25                    | 1   | 40                               | 85                                | 55                       | 1   | 90                      | 1 | 135                      | 3 | 3              | 32.34                             | 12.24                                                     | 34.00               | 2841             |
| CACC-509B  | 23.7                  | 1   | 25                               | 78                                | 40                       | 1   | 72.4                    | 1 | 125.4                    | 3 | 2              | 27.70                             | 8.44                                                      | 19.50               | 1678             |
| CACC-509D  | 24.7                  | 1   | 25                               | 78                                | 40                       | 1   | 74.4                    | 1 | 127.4                    | 2 | 3              | 27.84                             | 8.79                                                      | 19.50               | 1758             |
| CACC-531   | 25                    | 1   | 35                               | 105                               | 65                       | 1   | 85                      | 1 | 155                      | 3 | 2              | 35.51                             | 14.46                                                     | 36.75               | 3687             |
| CACC-549   | 42                    | 1.5 | 35                               | 105                               | 40                       | 1   | 119                     | 2 | 189                      | 3 | 4              | 40.51                             | 14.95                                                     | 36.75               | 4349             |
| CACC-557   | 30                    | 1   | 35                               | 100                               | 60                       | 1   | 95                      | 1 | 160                      | 3 | 3              | 35.91                             | 16.02                                                     | 35.00               | 4130             |
| CACC-570A  | 25                    | 1   | 40                               | 100                               | 45                       | 1   | 90                      | 1 | 150                      | 3 | 3              | 35.34                             | 10.01                                                     | 40.00               | 2541             |
| CACC-570B  | 25                    | 1   | 40                               | 100                               | 50                       | 1   | 90                      | 1 | 150                      | 3 | 3              | 35.34                             | 11.13                                                     | 40.00               | 2823             |
| CACC-630   | 25                    | 1   | 40                               | 85                                | 70                       | 1   | 90                      | 1 | 135                      | 3 | 3              | 32.34                             | 15.58                                                     | 34.00               | 3616             |
| CACC-650   | 40                    | 1.5 | 40                               | 115                               | 40                       | 1   | 120                     | 2 | 195                      | 3 | 4              | 42.88                             | 14.24                                                     | 46.00               | 4384             |
| CACC-660   | 40                    | 1.5 | 80                               | 80                                | 40                       | 1   | 160                     | 2 | 160                      | 3 | 4              | 43.88                             | 14.24                                                     | 64.00               | 4486             |
| CACC-695   | 40                    | 1.5 | 35                               | 94                                | 60                       | 1   | 115                     | 2 | 174                      | 3 | 4              | 37.68                             | 21.36                                                     | 32.90               | 5779             |
| CACC-787   | 40                    | 1.5 | 40                               | 85                                | 65                       | 1   | 120                     | 2 | 165                      | 3 | 4              | 36.88                             | 23.14                                                     | 34.00               | 6127             |
| CACC-800A  | 25                    | 1   | 40                               | 85                                | 85                       | 1.5 | 90                      | 1 | 135                      | 3 | 4              | 32.17                             | 18.91                                                     | 34.00               | 4368             |
| CACC-800B  | 30                    | 1   | 40                               | 95                                | 85                       | 1.5 | 100                     | 2 | 155                      | 3 | 4              | 35.74                             | 22.70                                                     | 38.00               | 5824             |
| CACC-802   | 32                    | 1   | 60                               | 118                               | 40                       | 1   | 124                     | 2 | 182                      | 3 | 4              | 44.97                             | 11.39                                                     | 70.80               | 3678             |
| CACC-836   | 25                    | 1   | 50                               | 126                               | 60                       | 1   | 100                     | 2 | 176                      | 3 | 4              | 42.37                             | 13.35                                                     | 63.00               | 4061             |
| CACC-920   | 21.5                  | 1   | 60                               | 90                                | 90                       | 1.5 | 103                     | 2 | 133                      | 3 | 4              | 36.07                             | 17.22                                                     | 54.00               | 4460             |
| CACC-1000  | 33                    | 1   | 40                               | 105                               | 85                       | 1.5 | 106                     | 2 | 171                      | 3 | 4              | 38.68                             | 24.96                                                     | 42.00               | 6933             |
| CACC-1050  | 40                    | 1.5 | 50                               | 100                               | 70                       | 1   | 130                     | 2 | 180                      | 3 | 4              | 41.88                             | 24.92                                                     | 50.00               | 7493             |
| CACC-1200  | 40                    | 1.5 | 79                               | 130                               | 70                       | 1   | 159                     | 2 | 210                      | 4 | 5              | 53.51                             | 24.92                                                     | 102.70              | 9574             |
| CACC-1300  | 40                    | 1.5 | 86                               | 150                               | 70                       | 1   | 166                     | 2 | 230                      | 4 | 5              | 58.91                             | 24.92                                                     | 129.00              | 10540            |
| CACC-1400  | 40                    | 1.5 | 64                               | 120                               | 80                       | 1.5 | 144                     | 2 | 200                      | 4 | 5              | 48.51                             | 28.48                                                     | 76.80               | 9919             |
| CACC-1500  | 40                    | 1.5 | 64                               | 160                               | 80                       | 1.5 | 144                     | 2 | 240                      | 4 | 5              | 56.51                             | 28.48                                                     | 102.40              | 11555            |
| CACC-1600  | 45                    | 1.5 | 45                               | 145                               | 95                       | 1.5 | 135                     | 2 | 235                      | 4 | 4              | 51.45                             | 38.05                                                     | 65.25               | 14055            |
| CACC-1658  | 50                    | 1.5 | 60                               | 138                               | 45                       | 1   | 160                     | 2 | 238                      | 4 | 5              | 54.45                             | 20.03                                                     | 82.80               | 7829             |
| CACC-1800  | 33                    | 1   | 75                               | 240                               | 60                       | 1   | 141                     | 2 | 306                      | 4 | 5              | 72.51                             | 17.62                                                     | 180.00              | 9174             |
| CACC-2000  | 60                    | 1.5 | 60                               | 150                               | 35                       | 1   | 180                     | 3 | 270                      | 4 | 5              | 59.99                             | 18.69                                                     | 90.00               | 8050             |
| CACC-2950  | 28                    | 1   | 78                               | 128                               | 120                      | 1.5 | 134                     | 2 | 184                      | 4 | 5              | 49.14                             | 29.90                                                     | 99.84               | 10550            |
| CACC-3604  | 40                    | 1.5 | 64                               | 201                               | 80                       | 1   | 144                     | 2 | 281                      | 4 | 5              | 64.71                             | 28.48                                                     | 128.64              | 13232            |
| CACC-10000 | 75                    | 1.5 | 50                               | 150                               | 142                      | 1.5 | 200                     | 3 | 300                      | 4 | 5              | 62.70                             | 94.79                                                     | 75.00               | 42673            |
| CACC-18855 | 80                    | 1.5 | 100                              | 193                               | 142                      | 1.5 | 260                     | 3 | 353                      | 4 | 5              | 82.87                             | 101.10                                                    | 193.00              | 60161            |
| CACC-25000 | 80                    | 1.5 | 60                               | 180                               | 80                       | 1.5 | 220                     | 3 | 340                      | 4 | 5              | 72.27                             | 56.96                                                     | 108.00              | 29558            |
| CACC-30000 | 75                    | 1.5 | 72                               | 385                               | 75                       | 1   | 222                     | 3 | 535                      | 4 | 5              | 114.10                            | 50.06                                                     | 277.20              | 41014            |

备注：\*表中性能仅供客户初步设计选型用，具体性能参数以承认书为准。      \*可根据客户要求制作各种环形、矩形、钳表形及其它形状的铁芯。  
\*The provided data is for customer's initial design guidelines only, please check the approval data sheet before ordering.    \*Toroidal, Oval, Clamp Shape or other customized designs are available.


非晶 CACC 系列铁芯典型电磁性能曲线 Typical electromagnetic performance curve for CACC core in Iron-based Amorphous

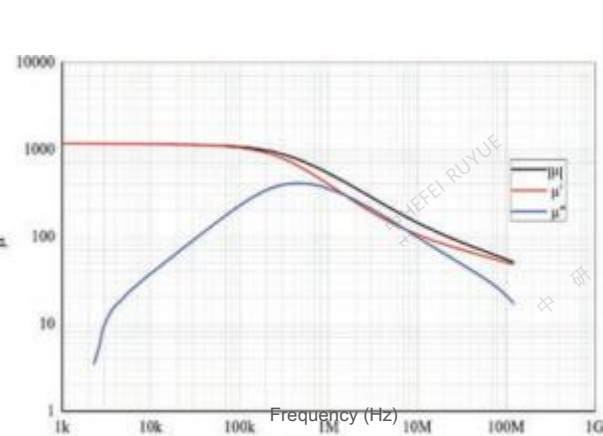


图一：非晶 CACC 系列铁芯磁导率与频率曲线的关系  
The Permeability Curve With Frequency Of Amorphous CACC Core

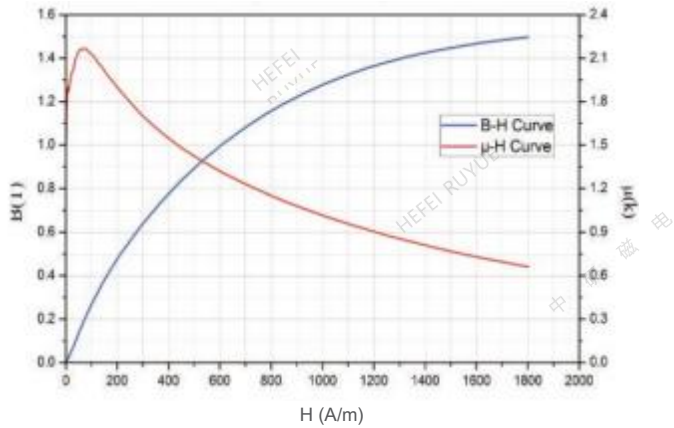


图二：非晶 CACC 系列铁芯静态磁化曲线与磁导率曲线  
The B-H Curve And μ-H Curve Of Amorphous CACC Core

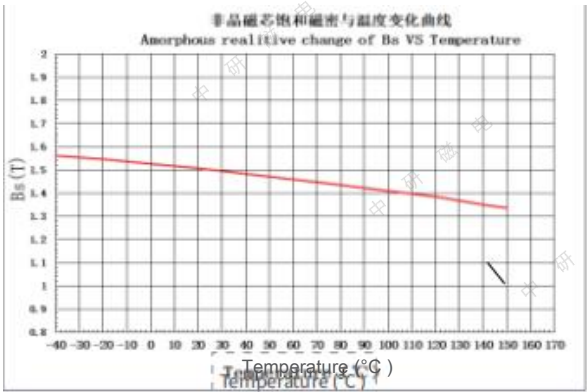


图三：非晶 CACC 系列铁芯饱和磁密与温度变化曲线  
The Relative Change For Bs VS Temperature Of Amorphous CACC Core

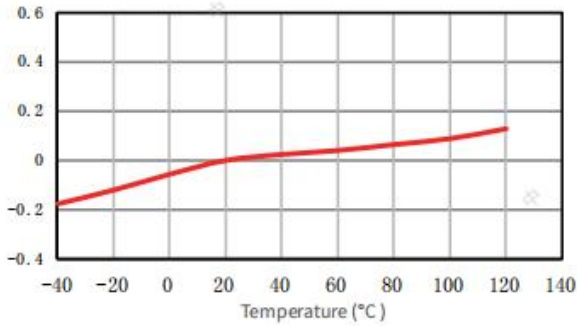

图四：非晶 CACC 系列铁芯的磁导率与温度的曲线变化  
The Relative Change For μ vs Temperature Of Amorphous CACC Core  
( Test @ 1K101 10K )

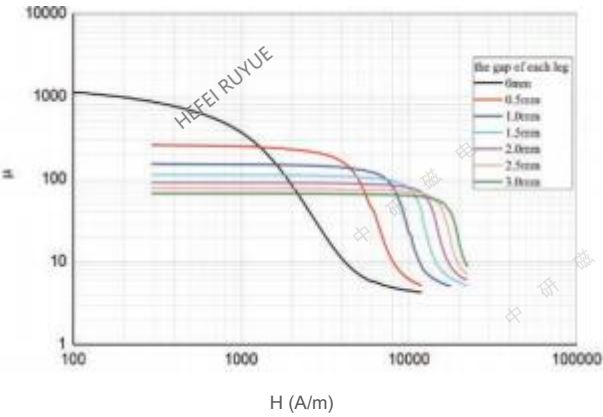

图五：非晶 CACC 系列铁芯直流偏置特性曲线  
The DC-Bias Curve Of Amorphous CACC Core

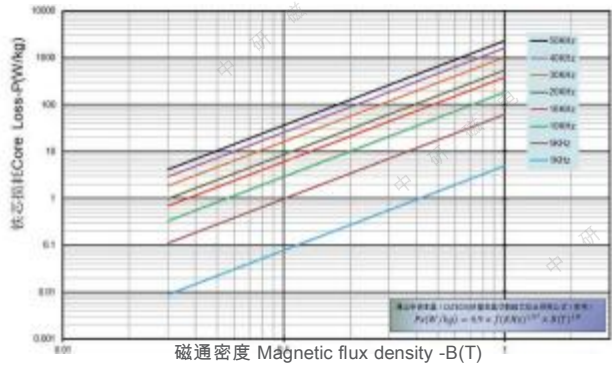

图六：非晶 CACC 系列铁芯损耗曲线  
The Core Loss Of Amorphous CACC Core

# 铁基纳米晶C型铁芯 Fe-based Nanocrystalline C Core

## 应用领域 Application

- 中频变压器  
Ntermediate frequency transformer
- 轨道交通的辅助电源变压器  
Auxiliary power transformer for rail transit
- 新能源汽车中的电感  
Inductor for new energy vehicles
- 取电变压器  
Power transformer

## 性能特点 Features

- 低损耗(20kHz , 0.05T P≤0.5w/kg)  
Low core loss (20kHz , 0.05T P≤0.5w/kg)
- 高磁导率(10000-15000 Gs/Oe)  
High permeability (10000-15000 Gs/Oe)
- 低磁滞噪音  
Low hysteresis noise

| 产品规格编码说明        | CA | CC              | 100                 | NR                     |
|-----------------|----|-----------------|---------------------|------------------------|
| P/N Description | /  | C 型铁芯<br>C-core | 规格序列号<br>Serial No. | 纳米晶<br>Nanocrystalline |


| 型号<br>P/N  | 叠厚<br>Core build<br>(mm) |     | 窗口宽度<br>Window width<br>(mm)<br>ref | 窗口长度<br>Window length<br>(mm)<br>ref | 铁芯高度<br>Core height<br>(mm) |     | 铁芯宽度<br>Core width<br>(mm) |   | 铁芯长度<br>Core length<br>(mm) |     | 内圆角<br>R angle | 磁路长度<br>Magnetic path<br>length<br>(cm) | 有效截面积<br>Eff ective cross<br>section<br>area(cm <sup>2</sup> ) | 窗口面积<br>Window area | 重量<br>Weight<br>(g) |
|------------|--------------------------|-----|-------------------------------------|--------------------------------------|-----------------------------|-----|----------------------------|---|-----------------------------|-----|----------------|-----------------------------------------|----------------------------------------------------------------|---------------------|---------------------|
|            | a                        | ±   |                                     |                                      | d                           | ±   | e                          | ± | f                           | ±   |                |                                         |                                                                |                     |                     |
| CACC-4NR   | 9                        | 0.5 | 10                                  | 32.8                                 | 15                          | 0.5 | 28                         | 1 | 50.8                        | 1.5 | 1              | 11.22                                   | 1.07                                                           | 3.28                | 87                  |
| CACC-6.3NR | 10                       | 0.5 | 11                                  | 33                                   | 20                          | 0.5 | 31                         | 1 | 53                          | 2   | 1              | 11.77                                   | 1.58                                                           | 3.63                | 135                 |
| CACC-8NR   | 11                       | 0.8 | 13                                  | 30                                   | 20                          | 0.5 | 35                         | 1 | 52                          | 2   | 1              | 11.88                                   | 1.74                                                           | 3.90                | 150                 |
| CACC-10NR  | 11                       | 0.8 | 13                                  | 40                                   | 20                          | 0.5 | 35                         | 1 | 62                          | 2   | 2              | 13.71                                   | 1.74                                                           | 5.20                | 173                 |
| CACC-12NR  | 8                        | 0.5 | 14                                  | 31                                   | 40                          | 1   | 30                         | 1 | 47                          | 1.5 | 2              | 11.17                                   | 2.53                                                           | 4.34                | 205                 |
| CACC-16ANR | 11                       | 0.8 | 13                                  | 40                                   | 25                          | 0.5 | 35                         | 1 | 62                          | 2   | 2              | 13.71                                   | 2.17                                                           | 5.20                | 216                 |
| CACC-16BNR | 11                       | 0.8 | 13                                  | 50                                   | 25                          | 0.5 | 35                         | 1 | 72                          | 2   | 2              | 15.71                                   | 2.17                                                           | 6.50                | 247                 |
| CACC-20NR  | 11                       | 0.8 | 13                                  | 50                                   | 30                          | 0.5 | 35                         | 1 | 72                          | 2   | 2              | 15.71                                   | 2.61                                                           | 6.50                | 297                 |
| CACC-25NR  | 13                       | 0.8 | 15                                  | 56                                   | 25                          | 0.5 | 41                         | 1 | 82                          | 2   | 2              | 17.94                                   | 2.57                                                           | 8.40                | 334                 |
| CACC-26NR  | 16                       | 1   | 40                                  | 45                                   | 20                          | 0.5 | 72                         | 1 | 77                          | 2   | 2              | 21.68                                   | 2.53                                                           | 18.00               | 397                 |
| CACC-32NR  | 13                       | 0.8 | 15                                  | 56                                   | 30                          | 0.5 | 41                         | 1 | 82                          | 2   | 2              | 17.94                                   | 3.08                                                           | 8.40                | 401                 |
| CACC-40NR  | 13                       | 0.8 | 15                                  | 56                                   | 35                          | 1   | 41                         | 1 | 82                          | 2   | 2              | 17.94                                   | 3.59                                                           | 8.40                | 468                 |
| CACC-50NR  | 16                       | 1   | 20                                  | 70                                   | 25                          | 0.5 | 52                         | 1 | 102                         | 3   | 2              | 22.68                                   | 3.16                                                           | 14.00               | 520                 |
| CACC-63NR  | 16                       | 1   | 20                                  | 70                                   | 30                          | 0.5 | 52                         | 1 | 102                         | 3   | 2              | 22.68                                   | 3.79                                                           | 14.00               | 624                 |
| CACC-64NR  | 16                       | 1   | 20                                  | 43                                   | 45                          | 1   | 52                         | 1 | 75                          | 2   | 2              | 17.28                                   | 5.69                                                           | 8.60                | 713                 |
| CACC-65NR  | 16                       | 1   | 20                                  | 58                                   | 45                          | 1   | 52                         | 1 | 90                          | 2   | 2              | 20.28                                   | 5.69                                                           | 11.60               | 836                 |
| CACC-66NR  | 15                       | 0.8 | 29                                  | 60                                   | 40                          | 1   | 59                         | 1 | 90                          | 2   | 2              | 22.17                                   | 4.74                                                           | 17.40               | 762                 |

| 型号<br>P/N   | 叠厚<br>Core build<br>(mm) |     | 窗口宽度<br>Window width<br>(mm)<br>ref |  | 窗口长度<br>Window length<br>(mm)<br>ref |  | 铁芯高度<br>Core height<br>(mm) |     | 铁芯宽度<br>Core width<br>(mm) |   | 铁芯长度<br>Core length<br>(mm) |   | 内圆角<br>R angle | 磁路长度<br>Magnetic path length<br>(cm) | 有效截面积<br>Eff ective cross section area(cm² ) | 窗口面积<br>Window area | 重量<br>Weight (g) |
|-------------|--------------------------|-----|-------------------------------------|--|--------------------------------------|--|-----------------------------|-----|----------------------------|---|-----------------------------|---|----------------|--------------------------------------|----------------------------------------------|---------------------|------------------|
|             | a                        | ±   | b                                   |  | c                                    |  | d                           | ±   | e                          | ± | f                           | ± |                |                                      |                                              |                     |                  |
| CACC-70NR   | 20                       | 1   | 40                                  |  | 60                                   |  | 30                          | 0.5 | 80                         | 1 | 100                         | 3 | 2              | 25.94                                | 4.74                                         | 24.00               | 891              |
| CACC-80NR   | 16                       | 1   | 20                                  |  | 70                                   |  | 40                          | 1   | 52                         | 1 | 102                         | 3 | 2              | 22.68                                | 5.06                                         | 14.00               | 831              |
| CACC-84NR   | 12                       | 0.8 | 30                                  |  | 60                                   |  | 20                          | 0.5 | 54                         | 1 | 84                          | 2 | 2              | 21.43                                | 1.90                                         | 18.00               | 295              |
| CACC-100NR  | 16                       | 1   | 20                                  |  | 70                                   |  | 45                          | 1   | 52                         | 1 | 102                         | 3 | 2              | 22.68                                | 5.69                                         | 14.00               | 935              |
| CACC-110NR  | 16                       | 1   | 25                                  |  | 75                                   |  | 45                          | 1   | 57                         | 1 | 107                         | 3 | 2              | 24.68                                | 5.69                                         | 18.75               | 1018             |
| CACC-117NR  | 20                       | 1   | 35                                  |  | 77                                   |  | 20                          | 0.5 | 75                         | 1 | 117                         | 3 | 2              | 28.34                                | 3.16                                         | 26.95               | 649              |
| CACC-125NR  | 19                       | 1   | 25                                  |  | 83                                   |  | 35                          | 1   | 63                         | 1 | 121                         | 3 | 2              | 27.23                                | 5.25                                         | 20.75               | 1037             |
| CACC-128NR  | 22                       | 1   | 35                                  |  | 84                                   |  | 25                          | 0.5 | 79                         | 1 | 128                         | 3 | 2              | 30.37                                | 4.35                                         | 29.40               | 957              |
| CACC-140NR  | 26                       | 1   | 45                                  |  | 88                                   |  | 30                          | 0.5 | 97                         | 1 | 140                         | 3 | 3              | 34.25                                | 6.16                                         | 39.60               | 1530             |
| CACC-140ANR | 26                       | 1   | 45                                  |  | 88                                   |  | 40                          | 1   | 97                         | 1 | 140                         | 3 | 3              | 34.25                                | 8.22                                         | 39.60               | 2040             |
| CACC-160NR  | 19                       | 1   | 25                                  |  | 83                                   |  | 40                          | 1   | 63                         | 1 | 121                         | 3 | 2              | 27.23                                | 6.00                                         | 20.75               | 1185             |
| CACC-200NR  | 19                       | 1   | 25                                  |  | 83                                   |  | 50                          | 1   | 63                         | 1 | 121                         | 3 | 2              | 27.23                                | 7.51                                         | 20.75               | 1481             |
| CACC-210NR  | 40                       | 1.5 | 50                                  |  | 130                                  |  | 50                          | 1   | 130                        | 2 | 210                         | 3 | 4              | 47.88                                | 15.80                                        | 65.00               | 5485             |
| CACC-250NR  | 19                       | 1   | 25                                  |  | 90                                   |  | 60                          | 1   | 63                         | 1 | 128                         | 3 | 2              | 28.63                                | 9.01                                         | 22.50               | 1869             |
| CACC-275NR  | 25                       | 1   | 35                                  |  | 78                                   |  | 50                          | 1   | 85                         | 1 | 128                         | 3 | 2              | 30.11                                | 9.88                                         | 27.30               | 2156             |
| CACC-320NR  | 22                       | 1   | 35                                  |  | 85                                   |  | 50                          | 1   | 79                         | 1 | 129                         | 3 | 3              | 30.40                                | 8.69                                         | 29.75               | 1915             |
| CACC-320BNR | 22                       | 1   | 35                                  |  | 105                                  |  | 50                          | 1   | 79                         | 1 | 149                         | 3 | 3              | 34.40                                | 8.69                                         | 36.75               | 2167             |
| CACC-327NR  | 25                       | 1   | 35                                  |  | 105                                  |  | 40                          | 1   | 85                         | 1 | 155                         | 3 | 2              | 35.51                                | 7.90                                         | 36.75               | 2034             |
| CACC-385NR  | 20                       | 1   | 35                                  |  | 90.5                                 |  | 70                          | 1   | 75                         | 1 | 130.5                       | 3 | 3              | 30.87                                | 11.06                                        | 31.68               | 2475             |
| CACC-400NR  | 22                       | 1   | 35                                  |  | 85                                   |  | 65                          | 1   | 79                         | 1 | 129                         | 3 | 3              | 30.40                                | 11.30                                        | 29.75               | 2490             |
| CACC-455NR  | 17                       | 1   | 40                                  |  | 84                                   |  | 90                          | 1.5 | 74                         | 1 | 118                         | 3 | 2              | 29.80                                | 12.09                                        | 33.60               | 2611             |
| CACC-465NR  | 25                       | 1   | 40                                  |  | 105                                  |  | 50                          | 1   | 90                         | 1 | 155                         | 3 | 3              | 36.34                                | 9.88                                         | 42.00               | 2602             |
| CACC-500NR  | 25                       | 1   | 40                                  |  | 85                                   |  | 55                          | 1   | 90                         | 1 | 135                         | 3 | 3              | 32.34                                | 10.86                                        | 34.00               | 2547             |
| CACC-509BNR | 23.7                     | 1   | 25                                  |  | 78                                   |  | 40                          | 1   | 72.4                       | 1 | 125.4                       | 3 | 2              | 27.70                                | 7.49                                         | 19.50               | 1504             |
| CACC-509DNR | 24.7                     | 1   | 25                                  |  | 78                                   |  | 40                          | 1   | 74.4                       | 1 | 127.4                       | 2 | 3              | 27.84                                | 7.81                                         | 19.50               | 1576             |
| CACC-531NR  | 25                       | 1   | 35                                  |  | 105                                  |  | 65                          | 1   | 85                         | 1 | 155                         | 3 | 2              | 35.51                                | 12.84                                        | 36.75               | 3305             |
| CACC-549NR  | 42                       | 1.5 | 35                                  |  | 105                                  |  | 40                          | 1   | 119                        | 2 | 189                         | 3 | 4              | 40.51                                | 13.27                                        | 36.75               | 3898             |
| CACC-557NR  | 30                       | 1   | 35                                  |  | 100                                  |  | 60                          | 1   | 95                         | 1 | 160                         | 3 | 3              | 35.91                                | 14.22                                        | 35.00               | 3702             |
| CACC-570ANR | 25                       | 1   | 40                                  |  | 100                                  |  | 45                          | 1   | 90                         | 1 | 150                         | 3 | 3              | 35.34                                | 8.89                                         | 40.00               | 2277             |
| CACC-570BNR | 25                       | 1   | 40                                  |  | 100                                  |  | 50                          | 1   | 90                         | 1 | 150                         | 3 | 3              | 35.34                                | 9.88                                         | 40.00               | 2530             |
| CACC-630NR  | 25                       | 1   | 40                                  |  | 85                                   |  | 70                          | 1   | 90                         | 1 | 135                         | 3 | 3              | 32.34                                | 13.83                                        | 34.00               | 3241             |
| CACC-650NR  | 40                       | 1.5 | 40                                  |  | 115                                  |  | 40                          | 1   | 120                        | 2 | 195                         | 3 | 4              | 42.88                                | 12.64                                        | 46.00               | 3929             |
| CACC-660NR  | 40                       | 1.5 | 80                                  |  | 80                                   |  | 40                          | 1   | 160                        | 2 | 160                         | 3 | 4              | 43.88                                | 12.64                                        | 64.00               | 4021             |
| CACC-695NR  | 40                       | 1.5 | 35                                  |  | 94                                   |  | 60                          | 1   | 115                        | 2 | 174                         | 3 | 4              | 37.68                                | 18.96                                        | 32.90               | 5179             |
| CACC-787NR  | 40                       | 1.5 | 40                                  |  | 85                                   |  | 65                          | 1   | 120                        | 2 | 165                         | 3 | 4              | 36.88                                | 20.54                                        | 34.00               | 5492             |
| CACC-800ANR | 25                       | 1   | 40                                  |  | 85                                   |  | 85                          | 1.5 | 90                         | 1 | 135                         | 3 | 4              | 32.17                                | 16.79                                        | 34.00               | 3915             |
| CACC-800BNR | 30                       | 1   | 40                                  |  | 95                                   |  | 85                          | 1.5 | 100                        | 2 | 155                         | 3 | 4              | 35.74                                | 20.15                                        | 38.00               | 5220             |
| CACC-802NR  | 32                       | 1   | 60                                  |  | 118                                  |  | 40                          | 1   | 124                        | 2 | 182                         | 3 | 4              | 44.97                                | 10.11                                        | 70.80               | 3297             |
| CACC-836NR  | 25                       | 1   | 50                                  |  | 126                                  |  | 60                          | 1   | 100                        | 2 | 176                         | 3 | 4              | 42.37                                | 11.85                                        | 63.00               | 3640             |
| CACC-920NR  | 21.5                     | 1   | 60                                  |  | 90                                   |  | 90                          | 1.5 | 103                        | 2 | 133                         | 3 | 4              | 36.07                                | 15.29                                        | 54.00               | 3997             |
| CACC-1000NR | 33                       | 1   | 40                                  |  | 105                                  |  | 85                          | 1.5 | 106                        | 2 | 171                         | 3 | 4              | 38.68                                | 22.16                                        | 42.00               | 6214             |
| CACC-1050NR | 40                       | 1.5 | 50                                  |  | 100                                  |  | 70                          | 1   | 130                        | 2 | 180                         | 3 | 4              | 41.88                                | 22.12                                        | 50.00               | 6716             |
| CACC-1200NR | 40                       | 1.5 | 79                                  |  | 130                                  |  | 70                          | 1   | 159                        | 2 | 210                         | 4 | 5              | 53.51                                | 22.12                                        | 102.70              | 8581             |

| 型号<br>P/N    | 叠厚<br>Core build<br>(mm) |     | 窗口宽度<br>Window width<br>(mm)<br>ref |  | 窗口长度<br>Window length<br>(mm)<br>ref |  | 铁芯高度<br>Core height<br>(mm) |     | 铁芯宽度<br>Core width<br>(mm) |   | 铁芯长度<br>Core length<br>(mm) |   | 内圆角<br>R angle | 磁路长度<br>Magnetic path length<br>(cm) | 有效截面积<br>Eff ective cross section area(cm² ) | 窗口面积<br>Window area | 重量<br>Weight (g) |
|--------------|--------------------------|-----|-------------------------------------|--|--------------------------------------|--|-----------------------------|-----|----------------------------|---|-----------------------------|---|----------------|--------------------------------------|----------------------------------------------|---------------------|------------------|
|              | a                        | ±   | b                                   |  | c                                    |  | d                           | ±   | e                          | ± | f                           | ± |                |                                      |                                              |                     |                  |
| CACC-1300NR  | 40                       | 1.5 | 86                                  |  | 150                                  |  | 70                          | 1   | 166                        | 2 | 230                         | 4 | 5              | 58.91                                | 22.12                                        | 129.00              | 9447             |
| CACC-1400NR  | 40                       | 1.5 | 64                                  |  | 120                                  |  | 80                          | 1.5 | 144                        | 2 | 200                         | 4 | 5              | 48.51                                | 25.28                                        | 76.80               | 8891             |
| CACC-1500NR  | 40                       | 1.5 | 64                                  |  | 160                                  |  | 80                          | 1.5 | 144                        | 2 | 240                         | 4 | 5              | 56.51                                | 25.28                                        | 102.40              | 10357            |
| CACC-1600NR  | 45                       | 1.5 | 45                                  |  | 145                                  |  | 95                          | 1.5 | 135                        | 2 | 235                         | 4 | 4              | 51.45                                | 33.77                                        | 65.25               | 12598            |
| CACC-1658NR  | 50                       | 1.5 | 60                                  |  | 138                                  |  | 45                          | 1   | 160                        | 2 | 238                         | 4 | 5              | 54.45                                | 17.78                                        | 82.80               | 7017             |
| CACC-1800NR  | 33                       | 1   | 75                                  |  | 240                                  |  | 60                          | 1   | 141                        | 2 | 306                         | 4 | 5              | 72.51                                | 15.64                                        | 180.00              | 8223             |
| CACC-2000NR  | 60                       | 1.5 | 60                                  |  | 150                                  |  | 35                          | 1   | 180                        | 3 | 270                         | 4 | 5              | 59.99                                | 16.59                                        | 90.00               | 7216             |
| CACC-2950NR  | 28                       | 1   | 78                                  |  | 128                                  |  | 120                         | 1.5 | 134                        | 2 | 184                         | 4 | 5              | 49.14                                | 26.54                                        | 99.84               | 9456             |
| CACC-3604NR  | 40                       | 1.5 | 64                                  |  | 201                                  |  | 80                          | 1   | 144                        | 2 | 281                         | 4 | 5              | 64.71                                | 25.28                                        | 128.64              | 11860            |
| CACC-25000NR | 80                       | 1.5 | 60                                  |  | 180                                  |  | 80                          | 1.5 | 220                        | 3 | 340                         | 4 | 5              | 72.27                                | 50.56                                        | 108.00              | 26493            |
| CACC-30000NR | 75                       | 1.5 | 72                                  |  | 385                                  |  | 75                          | 1   | 222                        | 3 | 535                         | 4 | 5              | 114.10                               | 44.44                                        | 277.20              | 36761            |

备注：\*表中性能仅供客户初步设计选型用，具体性能参数以承诺书为准。 \*可根据客户要求制作各种环形、矩形、钳表形及其它形状的铁芯。  
\* The provided data is for customer's initial design guidelines only, please check the approval data sheet before ordering. \* Toroidal, Oval, Clamp Shape or other customized designs are available.

典型损耗曲线 Typical core loss curve

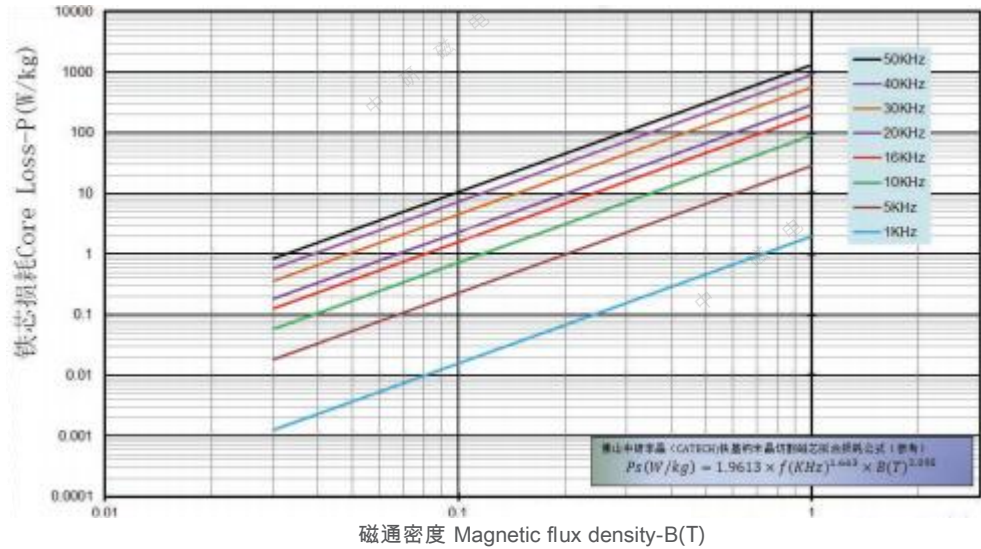


纳米晶 CACC 系列铁芯损耗曲线  
The Core Loss Curve of Nano-crystalline Cacc Cores

三相E型铁芯
Three Phase E-core

|                 |    |                 |                 |                     |
|-----------------|----|-----------------|-----------------|---------------------|
| 产品规格编码说明        | CA | CC              | (E)             | 47                  |
| P/N Description | P/ | C 型铁芯<br>C-core | E 型铁芯<br>E core | 规格序列号<br>Serial No. |

a- 铁芯叠厚    b- 铁芯窗宽    c- 铁芯窗高    d- 铁芯高度  
e- 铁芯外宽    f- 铁芯外长    Weight- 重量  
  
a-core build    b-window width    c-window height    d-core height  
e-core width    f-core length    Weight-weight in grams

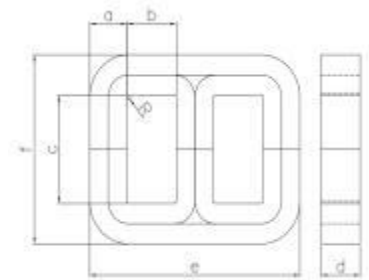


| 型号 P/N       | 叠厚<br>Core build<br>(mm) |     | 窗口宽度<br>Window width<br>(mm)<br>ref | 窗口长度<br>Window length<br>(mm)<br>ref | 铁芯高度<br>Core height<br>(mm) |     | 铁芯宽度<br>Core width<br>(mm) |   | 铁芯长度<br>Core length<br>(mm) |   | 内圆角<br>R angle | 有效截面积<br>Eff ective cross section area(cm²) | 重量<br>Weight (g) |
|--------------|--------------------------|-----|-------------------------------------|--------------------------------------|-----------------------------|-----|----------------------------|---|-----------------------------|---|----------------|---------------------------------------------|------------------|
|              | a                        | ±   | b                                   | c                                    | d                           | ±   | e                          | ± | f                           | ± | R              | Ae                                          | m                |
| CACC(E)-51   | 12                       | 0.8 | 20                                  | 36                                   | 25                          | 0.5 | 76                         | 1 | 60                          | 2 | 2              | 2.67                                        | 464              |
| CACC(E)-200  | 22                       | 1   | 25                                  | 70                                   | 30                          | 0.5 | 116                        | 2 | 114                         | 3 | 2              | 5.87                                        | 1743             |
| CACC(E)-300  | 25                       | 1   | 25                                  | 78                                   | 40                          | 1   | 125                        | 2 | 128                         | 3 | 2              | 8.9                                         | 2889             |
| CACC(E)-330  | 25                       | 1   | 30                                  | 86                                   | 30                          | 0.5 | 135                        | 2 | 136                         | 3 | 2              | 6.67                                        | 2365             |
| CACC(E)-350  | 22                       | 1   | 30                                  | 60                                   | 50                          | 1   | 126                        | 2 | 104                         | 2 | 2              | 9.79                                        | 2834             |
| CACC(E)-418  | 29                       | 1   | 30                                  | 95                                   | 30                          | 0.5 | 147                        | 2 | 153                         | 3 | 2              | 7.74                                        | 3017             |
| CACC(E)-552  | 25                       | 1   | 30                                  | 86                                   | 50                          | 1   | 135                        | 2 | 136                         | 3 | 2              | 11.12                                       | 3942             |
| CACC(E)-703  | 38                       | 1   | 34                                  | 68                                   | 40                          | 1   | 182                        | 2 | 144                         | 3 | 3              | 13.52                                       | 5046             |
| CACC(E)-879  | 38                       | 1   | 42                                  | 100                                  | 40                          | 1   | 198                        | 2 | 176                         | 3 | 3              | 13.52                                       | 6314             |
| CACC(E)-950  | 32                       | 1   | 40                                  | 64                                   | 50                          | 1   | 176                        | 2 | 128                         | 3 | 3              | 14.24                                       | 5132             |
| CACC(E)-1395 | 40                       | 1.5 | 90                                  | 130                                  | 40                          | 1   | 300                        | 2 | 210                         | 3 | 5              | 14.24                                       | 9604             |
| CACC(E)-2800 | 56                       | 2   | 56                                  | 172                                  | 55                          | 1   | 280                        | 3 | 284                         | 3 | 5              | 27.41                                       | 19843            |
| CACC(E)-5000 | 60                       | 2   | 60                                  | 184                                  | 60                          | 1   | 300                        | 3 | 304                         | 3 | 5              | 32.04                                       | 24843            |

铁基非晶块铁芯
Fe-based Amorphous Blocked Core

|                 |                |                      |             |                   |                  |
|-----------------|----------------|----------------------|-------------|-------------------|------------------|
| 产品规格编码说明        | CA             | BC                   | 0000        | 0000              | 0000             |
| P/N Description | 中研磁电<br>CATECH | 块状铁芯<br>Blocked core | 长<br>length | 带宽<br>strip width | 叠厚<br>core build |

a- 铁芯长度    b- 铁芯宽度    c- 铁芯叠厚  
Ae- 有效截面积    Weight- 重量  
  
a-core length    b-core width    c-core build  
Ae-Effective cross section area

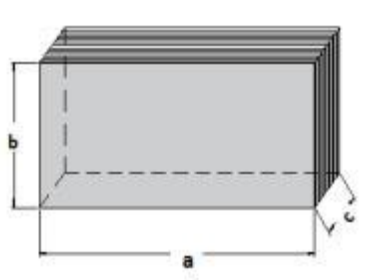

| 型号 P/N            | 铁芯尺寸<br>Bare core dimension<br>Length- Width- Core build<br>(mm) |     |     |     |     |     | 有效截面积<br>Eff ective cross section area<br>(cm²) | 重量<br>Weight (g) |
|-------------------|------------------------------------------------------------------|-----|-----|-----|-----|-----|-------------------------------------------------|------------------|
|                   | a                                                                | ±   | b   | ±   | c   | ±   | Ae                                              | m                |
| CABC-090002000300 | 90                                                               | 1   | 20  | 0.5 | 30  | 0.5 | 5.4                                             | 349              |
| CABC-098002800660 | 98                                                               | 1   | 28  | 0.3 | 66  | 1   | 16.63                                           | 1170             |
| CABC-082502500250 | 82.5                                                             | 0.5 | 25  | 0.5 | 25  | 0.5 | 5.62                                            | 333              |
| CABC-127002500250 | 127                                                              | 1   | 25  | 0.5 | 25  | 0.5 | 5.62                                            | 513              |
| CABC-130002500250 | 130                                                              | 1.5 | 25  | 0.5 | 25  | 0.5 | 5.62                                            | 525              |
| CABC-160002500600 | 160                                                              | 1.5 | 25  | 0.5 | 60  | 1   | 13.5                                            | 1551             |
| CABC-085003000700 | 85                                                               | 1   | 30  | 0.5 | 70  | 1   | 18.9                                            | 1153             |
| CABC-090003000800 | 90                                                               | 1   | 30  | 0.5 | 80  | 1   | 21.6                                            | 1396             |
| CABC-100003000850 | 100                                                              | 1   | 30  | 0.5 | 85  | 1   | 22.95                                           | 1648             |
| CABC-050802000480 | 50.8                                                             | 0.5 | 20  | 0.5 | 48  | 0.5 | 8.64                                            | 315              |
| CABC-110003000290 | 110                                                              | 1   | 30  | 0.5 | 29  | 0.5 | 7.83                                            | 618              |
| CABC-110003000350 | 110                                                              | 1   | 30  | 0.5 | 35  | 0.5 | 9.45                                            | 746              |
| CABC-110003000850 | 110                                                              | 1   | 30  | 0.5 | 85  | 1   | 22.95                                           | 1813             |
| CABC-140003000350 | 140                                                              | 1.5 | 30  | 0.5 | 35  | 0.5 | 9.45                                            | 950              |
| CABC-160003000850 | 160                                                              | 1.5 | 30  | 0.5 | 85  | 1   | 22.95                                           | 2636             |
| CABC-180003000700 | 180                                                              | 1.5 | 30  | 0.5 | 70  | 1   | 18.9                                            | 2443             |
| CABC-150035000950 | 150                                                              | 1.5 | 35  | 0.5 | 95  | 1   | 29.92                                           | 3223             |
| CABC-285003500850 | 285                                                              | 1.5 | 35  | 0.5 | 85  | 1   | 26.77                                           | 5479             |
| CABC-230005000700 | 230                                                              | 1.5 | 50  | 1   | 70  | 1   | 31.5                                            | 5202             |
| CABC-360008001300 | 360                                                              | 1.5 | 80  | 1   | 130 | 1.5 | 93.6                                            | 24194            |
| CABC-029008001300 | 29                                                               | 0.5 | 80  | 1   | 130 | 1.5 | 93.6                                            | 1949             |
| CABC-048002500850 | 48                                                               | 0.5 | 25  | 0.5 | 85  | 1   | 19.12                                           | 659              |
| CABC-036002500850 | 36                                                               | 0.5 | 25  | 0.5 | 85  | 1   | 19.12                                           | 494              |
| CABC-239001500550 | 239                                                              | 1.5 | 15  | 0.5 | 55  | 1   | 7.42                                            | 1274             |
| CABC-110002500600 | 110                                                              | 1   | 25  | 0.5 | 60  | 1   | 13.5                                            | 1066             |
| CABC-020002500600 | 20                                                               | 0.5 | 25  | 0.5 | 60  | 1   | 13.5                                            | 194              |
| CABC-032005000320 | 32                                                               | 0.5 | 50  | 1   | 32  | 0.5 | 14.4                                            | 331              |
| CABC-025002500250 | 25                                                               | 0.5 | 25  | 0.5 | 25  | 0.5 | 5.62                                            | 101              |
| CABC-380012002000 | 380                                                              | 1.5 | 120 | 1   | 200 | 1.5 | 216                                             | 58933            |
| CABC-320006000650 | 320                                                              | 1.5 | 60  | 1   | 65  | 1   | 35.1                                            | 8065             |
| CABC-630007000700 | 630                                                              | 2   | 70  | 1   | 70  | 1   | 44.1                                            | 19948            |

铁基纳米晶环形切割铁芯


Fe-based Nanocrystalline Toroidal Split Core

应用领域 Application

- 开启式电流互感器  
Current Transformer
- 传感器  
Current Sensor
- 功率电感及变压器  
Power Inductor and Transformer core

性能特点

- 切割后磁导率可达到 10000 以上，有效提高开启式互感器的精度  
The permeability can reach more than 10000 After cutting，Effectively improve the precision of the current transformer
- 低损耗，减少电感的发热量及提高使用寿命  
Low loss，Reduce the heat of the component and prolong the life time
- 优异的线性度，比相同规格的硅钢片铁芯线性提高 20%  
Excellent Linearity，20% higher than the same size of silicon steel core
- 优异的性价比，价格比坡莫合金低  
Excellent cost-effective，half price compare with permalloy core

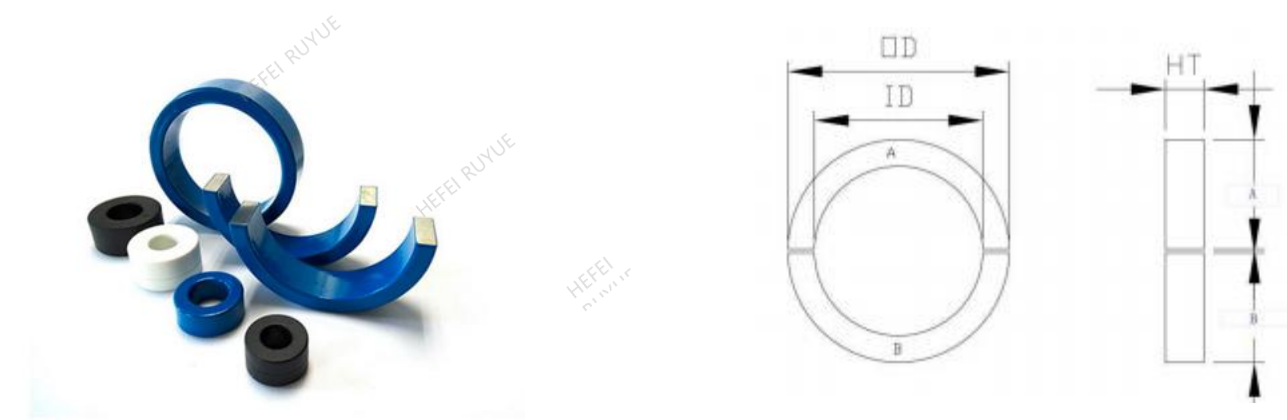

|                 |                                |                    |                 |                    |
|-----------------|--------------------------------|--------------------|-----------------|--------------------|
| 产品规格编码说明        | NF                             | 0000               | c               | 01                 |
| P/N Description | 开启式互感器<br>Split CT Core Series | 规格序号<br>Serial No. | 喷涂产品<br>Coating | 特征码<br>Feature No. |

| 型号<br>P/N | 铁芯尺寸<br>Bare core dimension<br>(mm) |      |    | 成品尺寸<br>Finished core dimension<br>(mm) |      |    | 磁路长度<br>Magnetic<br>path<br>length<br>(cm) | 截面积<br>Cross<br>section<br>area<br>(cm²) | 体积<br>Volume<br>(cm³) | 铁芯重量<br>Weight<br>(g) |
|-----------|-------------------------------------|------|----|-----------------------------------------|------|----|--------------------------------------------|------------------------------------------|-----------------------|-----------------------|
|           | OD                                  | ID   | HT | OD                                      | ID   | HT | Le                                         | Ae                                       | Ve                    | m                     |
| NF-0001-C | 40                                  | 20   | 15 | 42                                      | 18   | 16 | 9.42                                       | 1.20                                     | 11.30                 | 82                    |
| NF-0002-C | 115                                 | 80   | 35 | 117                                     | 78   | 36 | 30.62                                      | 4.90                                     | 150.01                | 1088                  |
| NF-0004-C | 70                                  | 50   | 10 | 72                                      | 48   | 11 | 18.84                                      | 0.80                                     | 15.07                 | 109                   |
| NF-0019-C | 58                                  | 46   | 10 | 60                                      | 44   | 11 | 16.33                                      | 0.48                                     | 7.84                  | 57                    |
| NF-0032-C | 74                                  | 50   | 35 | 76                                      | 48   | 36 | 19.49                                      | 3.36                                     | 65.41                 | 474                   |
| NF-0035-C | 86                                  | 60   | 20 | 88                                      | 58   | 21 | 22.92                                      | 2.08                                     | 47.68                 | 346                   |
| NF-0044-C | 44                                  | 32   | 10 | 46                                      | 30   | 11 | 11.93                                      | 0.48                                     | 5.73                  | 42                    |
| NF-0047-C | 73                                  | 53   | 5  | 75                                      | 51   | 6  | 19.78                                      | 0.40                                     | 7.91                  | 57                    |
| NF-0048   | 173                                 | 143  | 35 | 175                                     | 141  | 36 | 49.61                                      | 4.20                                     | 208.37                | 1511                  |
| NF-0049   | 173                                 | 143  | 50 | 175                                     | 141  | 51 | 49.61                                      | 6.00                                     | 297.67                | 2158                  |
| NF-0051-C | 45                                  | 33   | 10 | 47                                      | 31   | 11 | 12.25                                      | 0.48                                     | 5.88                  | 43                    |
| NF-0054   | 102                                 | 70   | 40 | 104                                     | 68   | 41 | 27.00                                      | 5.12                                     | 138.26                | 1002                  |
| NF-0060   | 120                                 | 105  | 10 | 122                                     | 103  | 11 | 35.33                                      | 0.60                                     | 21.20                 | 154                   |
| NF-0063-C | 86                                  | 66.5 | 15 | 88                                      | 64.5 | 16 | 23.94                                      | 1.17                                     | 28.01                 | 203                   |
| NF-0064-C | 45                                  | 33   | 5  | 47                                      | 31   | 6  | 12.25                                      | 0.24                                     | 2.94                  | 21                    |
| NF-0065-C | 59                                  | 47   | 5  | 61                                      | 45   | 6  | 16.64                                      | 0.24                                     | 3.99                  | 29                    |
| NF-0067-C | 70                                  | 58   | 5  | 72                                      | 56   | 6  | 20.10                                      | 0.24                                     | 4.82                  | 35                    |
| NF-0071-C | 142                                 | 122  | 12 | 144                                     | 120  | 13 | 41.45                                      | 0.96                                     | 39.79                 | 288                   |
| NF-0072-C | 116                                 | 96   | 10 | 118                                     | 94   | 11 | 33.29                                      | 0.80                                     | 26.63                 | 193                   |
| NF-0079   | 145                                 | 75   | 35 | 147                                     | 73   | 36 | 34.54                                      | 9.80                                     | 338.49                | 2454                  |
| NF-0081-C | 136                                 | 120  | 10 | 138                                     | 118  | 11 | 40.19                                      | 0.64                                     | 25.72                 | 186                   |
| NF-0083-C | 71                                  | 57   | 8  | 73                                      | 55   | 9  | 20.10                                      | 0.45                                     | 9.00                  | 65                    |
| NF-0084-C | 92                                  | 78   | 8  | 94                                      | 76   | 9  | 26.69                                      | 0.45                                     | 11.96                 | 87                    |
| NF-0090-C | 34                                  | 18   | 12 | 36                                      | 16   | 13 | 8.16                                       | 0.77                                     | 6.27                  | 45                    |
| NF-0092-C | 53                                  | 43   | 5  | 55                                      | 41   | 6  | 15.07                                      | 0.20                                     | 3.01                  | 22                    |
| NF-0094   | 65                                  | 25   | 25 | 67                                      | 23   | 26 | 14.13                                      | 4.00                                     | 56.52                 | 410                   |
| NF-0096-C | 75                                  | 55   | 10 | 77                                      | 53   | 11 | 20.41                                      | 0.80                                     | 16.33                 | 118                   |
| NF-0099   | 48                                  | 38   | 10 | 50                                      | 36   | 11 | 13.50                                      | 0.40                                     | 5.40                  | 39                    |
| NF-0101-C | 90                                  | 75   | 30 | 92                                      | 73   | 31 | 25.91                                      | 1.80                                     | 46.63                 | 338                   |
| NF-0105-C | 24                                  | 15   | 8  | 26                                      | 13   | 9  | 6.12                                       | 0.29                                     | 1.76                  | 13                    |
| NF-0107-C | 208                                 | 178  | 20 | 210                                     | 176  | 21 | 60.60                                      | 2.40                                     | 145.44                | 1054                  |
| NF-0109-C | 111                                 | 102  | 10 | 113                                     | 100  | 11 | 33.44                                      | 0.36                                     | 12.04                 | 87                    |
| NF-0110-C | 119                                 | 101  | 15 | 121                                     | 99   | 16 | 34.54                                      | 1.08                                     | 37.30                 | 270                   |
| NF-0113-C | 145                                 | 123  | 15 | 147                                     | 121  | 16 | 42.08                                      | 1.32                                     | 55.54                 | 403                   |
| NF-0114-C | 98                                  | 80   | 12 | 100                                     | 78   | 13 | 27.94                                      | 0.86                                     | 24.15                 | 175                   |
| NF-0116-C | 74                                  | 53   | 12 | 76                                      | 51   | 13 | 19.94                                      | 1.01                                     | 20.10                 | 146                   |
| NF-0119-C | 80                                  | 60   | 20 | 82                                      | 58   | 21 | 21.98                                      | 1.60                                     | 35.17                 | 255                   |
| NF-0124-C | 120                                 | 90   | 15 | 122                                     | 88   | 16 | 32.97                                      | 1.80                                     | 59.35                 | 430                   |

备注：\*表中性能仅供客户初步设计选型用，具体性能参数以承认书为准。      \*可根据客户要求制作各种环形、矩形、钳表形及其它形状的铁芯。

\* The provided data is for customer's initial design guidelines only, please check the approval data sheet before ordering.      \* Toroidal, Oval, Clamp Shape or other customized designs are available.

| 型号<br>P/N | 铁芯尺寸<br>Bare core dimension<br>(mm) |      |     | 成品尺寸<br>Finished core dimension<br>(mm) |      |     | 磁路长度<br>Magnetic<br>path<br>length<br>(cm) | 截面积<br>Cross<br>section<br>area<br>(cm²) | 体积<br>Volume<br>(cm³) | 铁芯重量<br>Weight<br>(g) |
|-----------|-------------------------------------|------|-----|-----------------------------------------|------|-----|--------------------------------------------|------------------------------------------|-----------------------|-----------------------|
|           | OD                                  | ID   | HT  | OD                                      | ID   | HT  | Le                                         | Ae                                       | Ve                    | m                     |
| NF-0131-C | 70                                  | 40   | 25  | 72                                      | 38   | 26  | 17.27                                      | 3.00                                     | 51.81                 | 376                   |
| NF-0134-C | 47                                  | 33   | 7   | 49                                      | 31   | 8   | 12.56                                      | 0.39                                     | 4.92                  | 36                    |
| NF-0141-C | 138                                 | 118  | 10  | 140                                     | 116  | 11  | 40.19                                      | 0.80                                     | 32.15                 | 233                   |
| NF-0142-C | 161                                 | 137  | 12  | 163                                     | 135  | 13  | 46.78                                      | 1.15                                     | 53.90                 | 391                   |
| NF-0146-C | 127                                 | 116  | 10  | 129                                     | 114  | 11  | 38.15                                      | 0.44                                     | 16.79                 | 122                   |
| NF-0149-C | 65                                  | 40   | 45  | 67                                      | 38   | 46  | 16.48                                      | 4.50                                     | 74.18                 | 538                   |
| NF-0152-C | 85                                  | 68   | 18  | 87                                      | 66   | 19  | 24.02                                      | 1.22                                     | 29.40                 | 213                   |
| NF-0137   | 80                                  | 50   | 20  | 82                                      | 48   | 21  | 20.41                                      | 2.40                                     | 48.98                 | 355                   |
| NF-0158   | 44.6                                | 34.8 | 6.5 | 46.6                                    | 32.8 | 7.5 | 12.46                                      | 0.25                                     | 3.18                  | 23                    |
| NF-0162-C | 90                                  | 70   | 10  | 92                                      | 68   | 11  | 25.12                                      | 0.80                                     | 20.10                 | 146                   |
| NF-0164   | 100                                 | 74   | 35  | 102                                     | 72   | 36  | 27.31                                      | 3.64                                     | 99.44                 | 721                   |
| NF-0185-C | 86                                  | 61   | 12  | 88                                      | 59   | 13  | 23.07                                      | 1.20                                     | 27.69                 | 201                   |
| NF-0192   | 125                                 | 113  | 10  | 127                                     | 111  | 11  | 37.36                                      | 0.48                                     | 17.94                 | 130                   |
| NF-0194   | 107                                 | 70   | 45  | 109                                     | 68   | 46  | 27.78                                      | 6.66                                     | 185.07                | 1342                  |
| NF-0200-C | 42                                  | 28   | 18  | 44                                      | 26   | 19  | 10.99                                      | 1.01                                     | 11.08                 | 80                    |
| NF-0202   | 106                                 | 86   | 15  | 108                                     | 84   | 16  | 30.14                                      | 1.20                                     | 36.17                 | 262                   |
| NF-0204-C | 50                                  | 30   | 20  | 52                                      | 28   | 21  | 12.56                                      | 1.60                                     | 20.10                 | 146                   |
| NF-0207-C | 89                                  | 79   | 15  | 91                                      | 77   | 16  | 26.37                                      | 0.60                                     | 15.83                 | 115                   |
| NF-0211   | 74                                  | 57   | 18  | 76                                      | 55   | 19  | 20.56                                      | 1.22                                     | 25.17                 | 183                   |
| NF-0213-C | 80                                  | 40   | 30  | 82                                      | 38   | 31  | 18.84                                      | 4.80                                     | 90.43                 | 656                   |
| NF-0215-C | 83                                  | 59   | 13  | 85                                      | 57   | 14  | 22.29                                      | 1.25                                     | 27.82                 | 202                   |
| NF-0217   | 110                                 | 78   | 35  | 112                                     | 76   | 36  | 29.51                                      | 4.48                                     | 132.23                | 959                   |
| NF-0219-C | 85                                  | 68   | 18  | 87                                      | 66   | 19  | 24.02                                      | 1.22                                     | 29.40                 | 213                   |
| NF-0220-C | 62                                  | 52   | 8   | 64                                      | 50   | 9   | 17.89                                      | 0.32                                     | 5.73                  | 42                    |
| NF-0232-C | 107                                 | 80   | 30  | 109                                     | 78   | 31  | 29.35                                      | 3.24                                     | 95.12                 | 690                   |
| NF-0233-C | 112                                 | 80   | 25  | 114                                     | 78   | 26  | 30.14                                      | 3.20                                     | 96.46                 | 699                   |
| NF-0237-C | 86                                  | 58   | 15  | 88                                      | 56   | 16  | 22.60                                      | 1.68                                     | 37.98                 | 275                   |
| NF-0238-C | 100                                 | 50   | 35  | 102                                     | 48   | 36  | 23.55                                      | 7.00                                     | 164.85                | 1195                  |

备注：\*表中性能仅供客户初步设计选型用，具体性能参数以承认书为准。      \*可根据客户要求制作各种环形、矩形、钳表形及其它形状的铁芯。  
\*The provided data is for customer's initial design guidelines only, please check the approval data sheet before ordering.    \*Toroidal, Oval, Clamp Shape or other customized designs are available.

# 铁基纳米晶电流互感器铁芯

## Fe-based Nanocrystalline Current Transformer Core




### Application

- 精密电流互感器  
Precision Current Transformer
- 零序电流互感器 ZCT  
Zero Sequence Current Transformer
- 高中低压电器测量互感器  
Measuring transformers for high and low voltage appliances
- A型、AC型、B型漏电开关  
Leakage switch for Type A, Type AC, Type B
- 新能源汽车充电桩  
Charging piles for EV
- 新能源汽车(OBC、BMS 系统)  
OBC and BMS applications for EV system

### 性能特点 Features

- 高饱和磁感应强度、体积小  
High saturation magnetic induction — Small in size
- 高磁导率、低剩磁、互感器精度高、线性度好  
High permeability and low remanence — Excellent in precision and linearity of the transformer performance

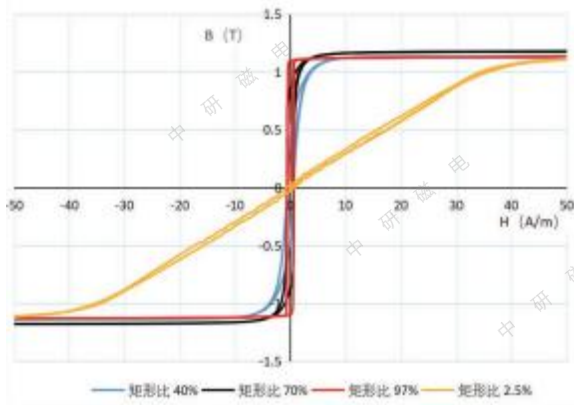

不同矩形比产品磁滞回线图  
Hysteresis loop diagram of products with different squareness ratios

|                 |                         |                    |                                                                                                                                                      |                    |
|-----------------|-------------------------|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| 产品规格编码说明        | NR                      | 0001               | w                                                                                                                                                    | 01                 |
| P/N Description | 互感器铁芯<br>CT Core Series | 规格序号<br>Serial No. | 封装方式: w- 白色护盒 /b- 黑色护盒<br>c- 喷涂 /t- 不锈钢护盒<br>Encapsulation method: w-white plastic case<br>b-black plastic case, c-coating<br>t-stainless steel case | 特征码<br>Feature No. |

| 型号<br>P/N    | 铁芯尺寸<br>Bare core dimension<br>(mm) |      |     | 成品尺寸<br>Finished core dimension<br>(mm) |      |      | 磁路长度<br>Magnetic<br>path<br>length<br>(cm) | 截面积<br>Cross<br>section area<br>(cm²) | 铁芯重量<br>Weight<br>(g) | 电感<br>AL<br>(μH)<br>Min |
|--------------|-------------------------------------|------|-----|-----------------------------------------|------|------|--------------------------------------------|---------------------------------------|-----------------------|-------------------------|
|              | OD                                  | ID   | HT  | OD                                      | ID   | HT   | Le                                         | Ae                                    | m                     | 1kHz/0.25V              |
| NR-0863-c    | 13                                  | 9    | 5   | 13.9                                    | 8.5  | 5.5  | 3.46                                       | 0.08                                  | 2.00                  | 25                      |
| NR-1779-w    | 13.5                                | 10   | 2.5 | 14.96                                   | 8.75 | 4.2  | 3.69                                       | 0.04                                  | 0.94                  | 9.2                     |
| NR-0664-w    | 17.5                                | 12.7 | 6.5 | 19                                      | 11   | 7.8  | 4.74                                       | 0.12                                  | 4.29                  | 50                      |
| NR-1461-w    | 17.5                                | 13   | 6.5 | 19                                      | 11   | 7.8  | 4.79                                       | 0.12                                  | 4.06                  | 20.4                    |
| NR-0083-w-04 | 17.8                                | 13   | 5   | 20.2                                    | 11.5 | 6.9  | 4.84                                       | 0.10                                  | 3.37                  | 30                      |
| NR-0731-c    | 18.5                                | 13.8 | 4.2 | 19                                      | 13.3 | 4.7  | 5.07                                       | 0.08                                  | 2.90                  | 1.5                     |
| NR-0555-w    | 19                                  | 14   | 6.5 | 22.2                                    | 12   | 9    | 5.18                                       | 0.13                                  | 4.89                  | 23                      |
| NR-1543-c    | 20.5                                | 16   | 10  | 21.5                                    | 15   | 11   | 5.73                                       | 0.18                                  | 7.48                  | 30                      |
| NR-0600-w    | 21                                  | 16   | 10  | 23.5                                    | 13   | 13   | 5.81                                       | 0.20                                  | 8.43                  | 69                      |
| NR-0604-L-b  | 21                                  | 15   | 10  | 23.8                                    | 12.5 | 12.7 | 5.65                                       | 0.24                                  | 9.84                  | 38                      |
| NR-1213-w    | 23                                  | 16   | 8   | 25                                      | 14   | 11   | 6.13                                       | 0.22                                  | 9.95                  | 35                      |
| NR-0384-b    | 26                                  | 19.5 | 6.5 | 28.5                                    | 17.4 | 8.5  | 7.15                                       | 0.17                                  | 8.76                  | 21                      |
| NR-0007-w    | 21                                  | 16   | 10  | 23.8                                    | 14.5 | 12.5 | 5.81                                       | 0.20                                  | 8.43                  | 55                      |
| NR-0006-w-02 | 20                                  | 14   | 5   | 22.5                                    | 12.5 | 6.5  | 5.34                                       | 0.12                                  | 4.65                  | 20                      |
| NR-0008-w    | 20                                  | 14   | 10  | 23.5                                    | 12.5 | 12.5 | 5.34                                       | 0.24                                  | 9.29                  | 40                      |
| NR-0704-w-02 | 34                                  | 28   | 5   | 36.8                                    | 25   | 7.5  | 9.74                                       | 0.12                                  | 8.47                  | 13                      |
| TSNR-1630-b  | 36.8                                | 35.8 | 3.2 | 39.6                                    | 33   | 5.4  | 11.40                                      | 0.01                                  | 1.06                  | /                       |
| NR-0631-b    | 37.6                                | 32   | 6.5 | 39.8                                    | 29.9 | 8.5  | 10.93                                      | 0.15                                  | 11.54                 | 12                      |
| NR-0565-w-01 | 39.5                                | 34   | 9   | 41.2                                    | 32.4 | 10.7 | 11.55                                      | 0.20                                  | 16.57                 | 20                      |
| NR-0084-w    | 40                                  | 30   | 10  | 43                                      | 27   | 13.5 | 11.00                                      | 0.38                                  | 29.89                 | 32                      |
| NR-0027-b    | 70                                  | 40   | 25  | 75                                      | 35   | 30   | 17.28                                      | 2.81                                  | 352                   | 154                     |
| NR-0028-w    | 82                                  | 45   | 50  | 87                                      | 40   | 55   | 19.95                                      | 6.94                                  | 1003                  | 327                     |
| NR-1288      | 82                                  | 60   | 35  | 87                                      | 55   | 40   | 22.31                                      | 2.89                                  | 467                   | 122                     |
| NR-0688-w    | 90                                  | 80   | 10  | 95                                      | 75   | 15   | 26.70                                      | 0.38                                  | 73                    | 13.5                    |
| NR-0131-w    | 100                                 | 75   | 20  | 105                                     | 70   | 25   | 27.49                                      | 1.88                                  | 374                   | 64                      |
| NR-0231-w    | 105                                 | 75   | 25  | 110                                     | 70   | 30   | 28.27                                      | 2.81                                  | 577                   | 94                      |
| NR-0130-w    | 110                                 | 90   | 45  | 115                                     | 85   | 50   | 31.42                                      | 3.38                                  | 769                   | 101                     |
| NR-0715-w    | 110                                 | 70   | 18  | 115                                     | 65   | 23   | 28.27                                      | 2.70                                  | 553                   | 90                      |
| NR-1201-t    | 110                                 | 70   | 30  | 115                                     | 65   | 35   | 28.27                                      | 4.50                                  | 922                   | 150                     |
| NR-1229-w    | 110                                 | 91   | 45  | 115                                     | 86   | 50   | 31.57                                      | 3.21                                  | 734                   | 96                      |
| NR-0038-w-01 | 115                                 | 85   | 20  | 120                                     | 80   | 25   | 31.42                                      | 2.25                                  | 512                   | 68                      |
| NR-0810-t    | 115                                 | 80   | 55  | 120                                     | 75   | 60   | 30.63                                      | 7.22                                  | 1603                  | 185                     |
| NR-1136-w    | 115                                 | 80   | 30  | 120                                     | 75   | 35   | 30.63                                      | 3.94                                  | 874                   | 122                     |
| NR-1137-w    | 115                                 | 80   | 35  | 120                                     | 75   | 40   | 30.63                                      | 4.59                                  | 1020                  | 141                     |
| NR-0062-w    | 120                                 | 90   | 30  | 125                                     | 85   | 35   | 32.99                                      | 3.38                                  | 807                   | 96                      |
| NR-0121-w    | 120                                 | 95   | 20  | 125                                     | 90   | 25   | 33.77                                      | 1.88                                  | 459                   | 53                      |
| NR-0138-w    | 120                                 | 95   | 15  | 125                                     | 90   | 20   | 33.77                                      | 1.41                                  | 344                   | 40                      |
| NR-0139-w    | 120                                 | 85   | 20  | 125                                     | 80   | 25   | 32.20                                      | 2.63                                  | 613                   | 77                      |
| NR-0164-w    | 120                                 | 90   | 25  | 125                                     | 85   | 30   | 32.99                                      | 2.81                                  | 673                   | 80                      |
| NR-1200-t    | 125                                 | 80   | 30  | 130                                     | 75   | 35   | 32.20                                      | 5.06                                  | 1182                  | 149                     |
| NR-1287-t    | 125                                 | 105  | 8   | 130                                     | 100  | 13   | 36.13                                      | 0.60                                  | 157                   | 14.7                    |
| NR-0852-t    | 127                                 | 110  | 35  | 132                                     | 105  | 40   | 37.23                                      | 2.23                                  | 602                   | 53                      |
| NR-0046-c    | 130                                 | 115  | 15  | 133                                     | 112  | 18   | 38.48                                      | 0.84                                  | 235                   | 19.5                    |
| NR-0063-b    | 130                                 | 100  | 30  | 135                                     | 95   | 35   | 36.13                                      | 3.38                                  | 884                   | 83                      |
| NR-1314-t    | 135                                 | 95   | 25  | 140                                     | 90   | 30   | 36.13                                      | 3.75                                  | 982                   | 92                      |
| NR-0906-w    | 140                                 | 100  | 20  | 145                                     | 95   | 25   | 37.70                                      | 3.00                                  | 820                   | 70                      |
| NR-1048-c    | 140                                 | 100  | 30  | 143                                     | 97   | 33   | 37.70                                      | 4.50                                  | 1230                  | 105                     |
| NR-0165-w-01 | 145                                 | 105  | 15  | 150                                     | 100  | 20   | 39.27                                      | 2.25                                  | 641                   | 51                      |
| NR-0451-w    | 149                                 | 105  | 25  | 154                                     | 100  | 30   | 39.90                                      | 4.13                                  | 1193                  | 91                      |
| NR-0985-w    | 160                                 | 115  | 10  | 165                                     | 110  | 15   | 43.20                                      | 1.69                                  | 528                   | 34.5                    |
| NR-0986-w    | 160                                 | 130  | 10  | 165                                     | 125  | 15   | 45.55                                      | 1.13                                  | 372                   | 21.8                    |
| NR-0831-t    | 180                                 | 100  | 40  | 185                                     | 95   | 45   | 43.98                                      | 12.00                                 | 3826                  | 240                     |
| NR-1154-w    | 200                                 | 175  | 15  | 206                                     | 170  | 20   | 58.90                                      | 1.41                                  | 601                   | 21                      |
| NR-1207-t    | 365                                 | 305  | 10  | 372                                     | 298  | 18   | 105.24                                     | 2.25                                  | 1717                  | 19                      |
| NR-1006-t    | 374                                 | 286  | 10  | 381                                     | 279  | 18   | 103.67                                     | 3.30                                  | 2480                  | 28                      |
| NR-1310-t    | 424                                 | 368  | 10  | 431                                     | 360  | 18   | 124.41                                     | 2.10                                  | 1894                  | 15                      |
| NR-1299-t    | 756                                 | 667  | 40  | 766                                     | 657  | 50   | 223.52                                     | 13.35                                 | 21634                 | 53                      |
| NR-1301-t    | 867                                 | 707  | 95  | 877                                     | 697  | 105  | 247.24                                     | 57.00                                 | 102173                | 203                     |

备注：\*表中性能仅供客户初步设计选型用，具体性能参数以承认书为准。 \*可根据客户要求制作各种环形、矩形、钳表形及其它形状的铁芯。  
\*The provided data is for customer's initial design guidelines only, please check the approval data sheet before ordering. \*Toroidal, Oval, Clamp Shape or other customized designs are available.

纳米晶互感器铁芯 BH 磁化曲线数据参考表 Nanocrystalline CT Core BH magnetization cuves data sheet

| H(mA/cm) | B(Gs) | °     | H(mA/cm) | B(Gs) | °     |
|----------|-------|-------|----------|-------|-------|
| 0.39     | 50    | 1.01  | 11.97    | 6800  | 42.75 |
| 0.77     | 100   | 1.13  | 12.51    | 7100  | 42.81 |
| 1.39     | 200   | 2.34  | 12.85    | 7200  | 42.81 |
| 1.85     | 300   | 4.4   | 13.31    | 7400  | 42.73 |
| 2.27     | 400   | 6.05  | 13.79    | 7600  | 42.59 |
| 2.62     | 500   | 7.7   | 14.36    | 7800  | 42.33 |
| 2.87     | 600   | 8.82  | 14.98    | 8000  | 41.96 |
| 3.16     | 700   | 10.1  | 15.66    | 8200  | 41.46 |
| 3.38     | 800   | 11.1  | 16.43    | 8400  | 40.79 |
| 3.61     | 900   | 12.31 | 17.2     | 8600  | 40.03 |
| 3.81     | 1000  | 13.21 | 18.31    | 8800  | 38.83 |
| 4.01     | 1100  | 14.16 | 19.47    | 9000  | 37.49 |
| 4.38     | 1300  | 16.34 | 20.15    | 9100  | 36.68 |
| 4.75     | 1500  | 18.51 | 20.98    | 9200  | 35.69 |
| 5.06     | 1700  | 20.1  | 21.8     | 9300  | 34.72 |
| 5.35     | 1900  | 22.01 | 22.74    | 9400  | 33.64 |
| 5.57     | 2100  | 22.92 | 23.68    | 9500  | 32.59 |
| 5.86     | 2300  | 24.65 | 24.73    | 9600  | 31.50 |
| 6.11     | 2500  | 25.37 | 25.95    | 9700  | 30.32 |
| 6.34     | 2700  | 26.4  | 27.43    | 9800  | 29.05 |
| 6.57     | 2900  | 27.42 | 29       | 9900  | 27.89 |
| 6.82     | 3100  | 29.02 | 30.7     | 10000 | 26.85 |
| 7.05     | 3300  | 29.83 | 32.63    | 10100 | 25.89 |
| 7.28     | 3500  | 30.78 | 35.3     | 10200 | 24.86 |
| 7.56     | 3700  | 31.99 | 38.17    | 10300 | 23.96 |
| 7.85     | 4000  | 33.12 | 41.47    | 10400 | 22.97 |
| 8.22     | 4300  | 35.02 | 45.36    | 10500 | 21.68 |
| 8.64     | 4600  | 36.34 | 50.25    | 10600 | 19.88 |
| 9.04     | 4900  | 38.15 | 53.67    | 10700 | 18.71 |
| 9.41     | 5200  | 39.89 | 58.59    | 10800 | 17.37 |
| 9.84     | 5500  | 41.28 | 62.5     | 10900 | 16.55 |
| 10.29    | 5800  | 41.99 | 68       | 11000 | 15.39 |
| 10.74    | 6100  | 42.3  | 75       | 11080 | 14.00 |
| 11.06    | 6300  | 42.37 | 80       | 11150 | 13.00 |
| 11.43    | 6500  | 42.56 | 85       | 11208 | 12.00 |


铁基非晶滤波电感铁芯
Fe-based Amorphous Core for Filtering Inductor

应用领域 Application

- 汽车音响用扼流圈
Chokes for car audio
- PFC 校正电感
PFC correction inductor
- 差模滤波器及平滑输出滤波器
Differential mode filter and out-put smoother
- DC/DC 转换器滤波线圈
DC/DC converter filter coil
- 常规滤波线圈及适配器滤波线圈
General filter coil and adapter filter coil

性能特点 Features

- 高饱和磁感应强度、低矫顽力、低损耗
High saturation magnetic induction, low coercivity, low loss
- 优良的抗直流偏置特性
Excellent in anti-DC bias
- 导磁率范围 40~2000
Permeability range 40~2000

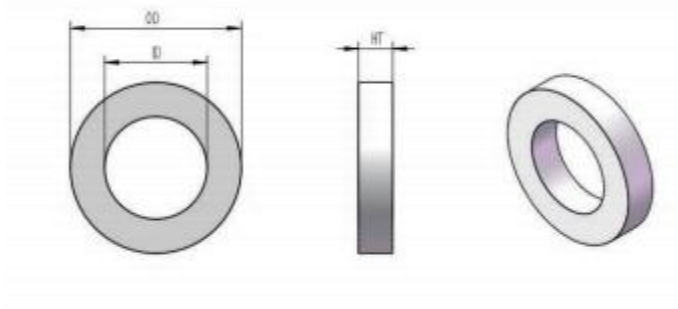


|                 |                                                                                |                    |                                                                                                                                              |                    |
|-----------------|--------------------------------------------------------------------------------|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| 产品规格编码说明        | AC/PFC                                                                         | 0001               | w                                                                                                                                            | 01                 |
| P/N Description | 非晶恒电感（无气隙）<br>功率因数校正（有气隙）磁芯系列<br>AC(without gap)<br>PFC(with gap ) Core Series | 规格序号<br>Serial No. | 封装方式：w- 白色护盒 /b- 黑色护盒<br>c- 喷涂 /t- 不锈钢护盒<br>Encapsulation method: w-white plastic case b-black plastic case, c-coatingt-stainless steel case | 特征码<br>Feature No. |


| 料号<br>P/N     | 铁芯尺寸<br>Bare core dimension<br>(mm) |      |     | 成品尺寸<br>Finished core dimension<br>(mm) |       |      | 截面积<br>Cross<br>section<br>area<br>(cm²) | 磁路长度<br>Magnetic<br>path<br>length<br>(cm) | 铁芯重量<br>Weight<br>(g) | 磁导率<br>Perme<br>ability<br>(μ) | 额定安<br>匝数<br>Rated<br>ampere<br>turns<br>(ref) |
|---------------|-------------------------------------|------|-----|-----------------------------------------|-------|------|------------------------------------------|--------------------------------------------|-----------------------|--------------------------------|------------------------------------------------|
|               | OD                                  | ID   | HT  | OD                                      | ID    | HT   | Ae                                       | Le                                         | m                     | 10KHz                          | AT                                             |
| AC-0109-c     | 6                                   | 3    | 3   | 6.5                                     | 2.5   | 3.5  | 0.04                                     | 1.41                                       | 0.39                  | 1600                           | 7                                              |
| AC-0232-c     | 6.5                                 | 3.5  | 3.2 | 7.3                                     | 2.7   | 3.8  | 0.04                                     | 1.57                                       | 0.47                  | 1600                           | 7                                              |
| AC-0036-w     | 13                                  | 8    | 8   | 15                                      | 6     | 10   | 0.17                                     | 3.30                                       | 4.07                  | 1000                           | 22                                             |
| AC-0093-w     | 15                                  | 9    | 5   | 17.5                                    | 7.5   | 7    | 0.13                                     | 3.77                                       | 3.49                  | 300                            | 65                                             |
| AC-0142-w     | 15                                  | 9.5  | 8   | 17                                      | 7.5   | 10   | 0.19                                     | 3.85                                       | 5.23                  | 800                            | 36                                             |
| AC-0091-w     | 16                                  | 10   | 8   | 18.5                                    | 8     | 10.5 | 0.21                                     | 4.08                                       | 6.05                  | 950                            | 25                                             |
| AC-0152-w     | 18                                  | 11   | 8   | 20.8                                    | 8.3   | 10.7 | 0.24                                     | 4.56                                       | 7.88                  | 600                            | 47                                             |
| AC-0082-w     | 18                                  | 11   | 10  | 21                                      | 8.3   | 13   | 0.30                                     | 4.56                                       | 9.84                  | 300                            | 85                                             |
| AC-0167-w     | 20                                  | 10   | 5   | 24                                      | 7.5   | 7.5  | 0.22                                     | 4.71                                       | 7.27                  | 1050                           | 26                                             |
| AC-0163-w     | 20                                  | 12   | 10  | 23                                      | 10.2  | 12.6 | 0.34                                     | 5.03                                       | 12.42                 | 800                            | 41                                             |
| AC-0014-w     | 22                                  | 13   | 10  | 26                                      | 9.5   | 14   | 0.39                                     | 5.50                                       | 15.28                 | 170                            | 200                                            |
| AC-0181-b     | 28                                  | 16   | 25  | 33                                      | 12    | 29   | 1.29                                     | 6.91                                       | 64                    | 600                            | 70                                             |
| TSAC-0218-w   | 28                                  | 19   | 12  | 30.5                                    | 16.5  | 13.5 | 0.46                                     | 7.38                                       | 25                    | 550                            | 110                                            |
| AC-0240-b     | 35                                  | 20   | 30  | 39                                      | 17    | 34   | 1.94                                     | 8.64                                       | 120                   | 400                            | 130                                            |
| AC-0225-c     | 37                                  | 25.5 | 15  | 38.5                                    | 24    | 16.2 | 0.74                                     | 9.82                                       | 52                    | 250                            | 220                                            |
| AC-0259-b     | 40                                  | 25   | 15  | 44                                      | 21    | 19   | 0.97                                     | 10.21                                      | 71                    | 550                            | 110                                            |
| AC-0154-b     | 50                                  | 32   | 20  | 54                                      | 27.5  | 24   | 1.55                                     | 12.88                                      | 143                   | 250                            | 300                                            |
| AC-0062-b     | 58                                  | 38   | 20  | 62.5                                    | 34    | 24   | 1.72                                     | 15.08                                      | 186                   | 5000                           | 17                                             |
| AC-0260       | 120                                 | 30   | 40  | 123                                     | 28    | 43   | 15.48                                    | 23.56                                      | 2619                  | 400                            | 250                                            |
| AC-0256       | 150                                 | 40   | 40  | 153                                     | 37    | 42   | 18.92                                    | 29.85                                      | 4054                  | 600                            | 500                                            |
| AC-0203-b     | 160                                 | 130  | 25  | 165.5                                   | 124.5 | 30.5 | 3.23                                     | 45.55                                      | 1055                  | 4000                           | 65                                             |
| PFC-0011-w    | 18                                  | 11   | 10  | 21                                      | 9     | 13   | 0.30                                     | 4.56                                       | 10                    | 100                            | 290                                            |
| PFC-0054-w    | 25                                  | 15   | 10  | 28                                      | 13    | 13   | 0.43                                     | 6.28                                       | 19                    | 100                            | 400                                            |
| PFC-0009-b    | 26                                  | 16   | 10  | 29                                      | 14    | 13   | 0.43                                     | 6.60                                       | 20                    | 100                            | 420                                            |
| PFC-0131-w    | 26                                  | 16   | 10  | 29                                      | 14    | 13   | 0.43                                     | 6.60                                       | 20                    | 100                            | 420                                            |
| PFC-0030-b    | 30                                  | 20   | 15  | 35                                      | 17    | 18   | 0.65                                     | 7.85                                       | 36                    | 100                            | 500                                            |
| PFC-0019-b    | 40                                  | 25   | 15  | 44                                      | 21    | 19   | 0.97                                     | 10.21                                      | 71                    | 100                            | 650                                            |
| PFC-0027-b    | 40                                  | 25   | 10  | 45                                      | 21    | 13   | 0.65                                     | 10.21                                      | 47                    | 100                            | 650                                            |
| PFC-0043-b-02 | 46                                  | 27   | 20  | 50                                      | 23    | 23   | 1.63                                     | 11.47                                      | 135                   | 210                            | 348                                            |
| PFC-0020-b    | 50                                  | 32   | 15  | 53                                      | 28    | 19   | 1.16                                     | 12.88                                      | 107                   | 100                            | 820                                            |
| PFC-0003-b    | 50                                  | 32   | 20  | 54                                      | 28    | 24   | 1.55                                     | 12.88                                      | 143                   | 100                            | 820                                            |
| PFC-0128-b    | 58                                  | 38   | 20  | 63                                      | 34    | 24   | 1.72                                     | 15.08                                      | 186                   | 100                            | 960                                            |
| PFC-0143-b    | 60                                  | 32   | 25  | 65                                      | 30    | 30   | 3.01                                     | 14.45                                      | 312                   | 100                            | 920                                            |
| PFC-0146-b-02 | 64                                  | 40   | 20  | 68                                      | 36    | 25   | 2.06                                     | 16.34                                      | 242                   | 120                            | 867                                            |
| PFC-0130-b    | 68                                  | 40   | 25  | 73                                      | 34    | 31   | 3.01                                     | 16.96                                      | 367                   | 120                            | 900                                            |
| PFC-0061-b    | 70                                  | 40   | 25  | 74                                      | 37    | 29   | 3.23                                     | 17.28                                      | 400                   | 100                            | 1100                                           |
| PFC-0004-b    | 80                                  | 50   | 25  | 84                                      | 47    | 29   | 3.23                                     | 20.42                                      | 473                   | 100                            | 1300                                           |
| PFC-0002-b-03 | 80                                  | 50   | 40  | 85                                      | 46    | 45   | 5.16                                     | 20.42                                      | 757                   | 100                            | 1300                                           |
| PFC-0017-b-02 | 100                                 | 60   | 20  | 105                                     | 53    | 27   | 3.44                                     | 25.13                                      | 621                   | 120                            | 1311                                           |
| PFC-0210      | 100                                 | 50   | 40  | 102                                     | 48    | 42   | 8.60                                     | 23.56                                      | 1455                  | 100                            | 1500                                           |
| PFC-0038      | 120                                 | 82   | 100 | 122                                     | 80    | 102  | 16.34                                    | 31.73                                      | 3723                  | 160                            | 1303                                           |
| PFC-0127      | 123                                 | 80   | 130 | 125                                     | 78    | 132  | 24.04                                    | 31.89                                      | 5503                  | 60                             | 3383                                           |

备注：\*表中性能仅供客户初步设计选型用，具体性能参数以承认书为准。 \*可根据客户要求制作各种环形、矩形、钳表形及其它形状的铁芯。  
\* The provided data is for customer's initial design guidelines only, please check the approval data sheet before ordering. \* Toroidal, Oval, Clamp Shape or other customized designs are available.


图一：铁基非晶铁芯磁导率直流偏置曲线

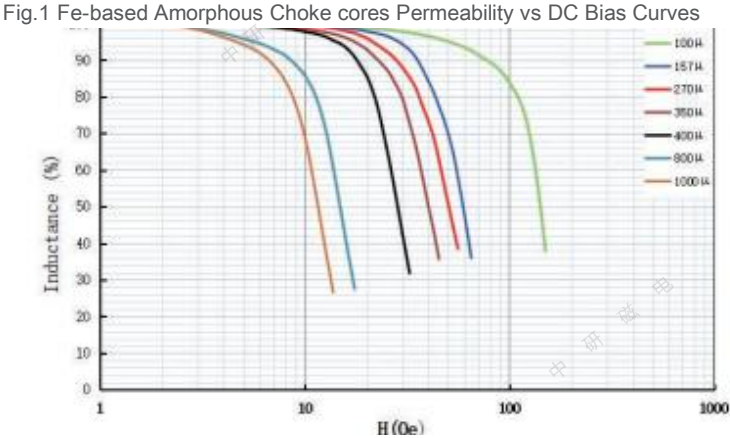

图二：磁导率频率特性曲线

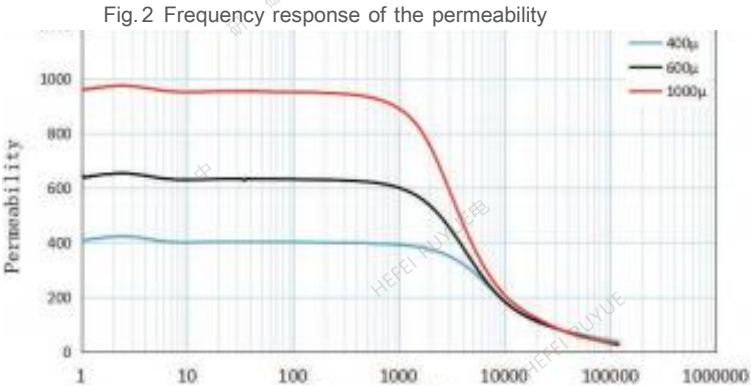

图三：铁基非晶磁导率与温度曲线

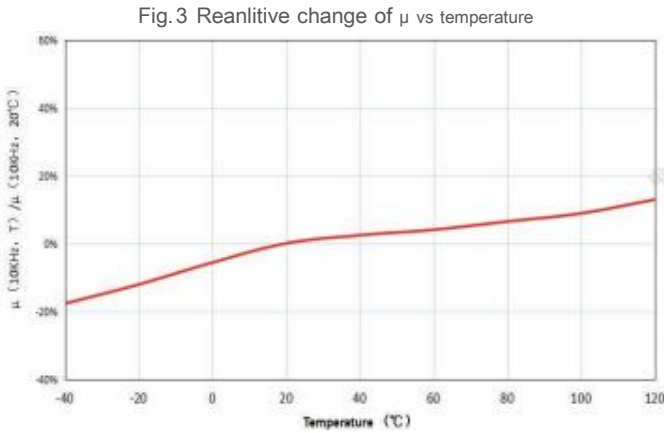

# 铁基纳米晶高频变压器铁芯

## Fe-based Nanocrystalline High Frequency Voltage Transformer Core


### 应用领域 Application

- 逆变焊机电源变压器  
Inverter welding power transformer
- X 光电源变压器、激光电源变压器、通讯设备电源变压器 PFC  
X ray power transformer, laser power transformer, communication equipment power transformer
- 不间断电源 (UPS) 和高频感应加热电源变压器  
UPS and high frequency induction heating power transformer
- 充电电源变压器  
Charging power transformer
- 电解电镀电源变压器  
Power plus transformer
- 变频调速电源变压器  
Frequency control transformer
- 等离子切割机变压器  
Cutting machine transformer



### 性能特点 Features


- 高饱和磁感应强度及高导磁性—有效缩小器件体积，减轻器件质量  
High saturation magnetic induction intensity and high magnetic conductivity: effectively helps to reduce the size and the weight of the components.
- 高导磁率低矫顽力—提高变压器效率，减少激磁功率  
High permeability and low coercivity: helps to improve transformer efficiency and reduce excitation power.
- 低剩磁—获得更大的磁感应增量，得到更大的输出功率  
Low remanence: obtain greater magnetic induction increment, resulting in greater output power.
- 低损耗—降低变压器温升，提高变压器效率  
Low loss: reduce transformer temperature rise, improve transformer efficiency
- 良好的温度稳定性—可在 -40°C~130°C 工作  
Good temperature stability: -40°C~130°C



|                 |                                    |                    |                                                                                                                                                         |                    |
|-----------------|------------------------------------|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| 产品规格编码说明        | NH                                 | 0001               | w                                                                                                                                                       |                    |
| P/N Description | 逆变器铁芯系列<br>Transformer core series | 规格序号<br>Serial No. | 封装方式：w- 白色护盒 /b- 黑色护盒<br>c- 喷涂 /t- 不锈钢护盒<br>Encapsulation method: w- white plastic case<br>b- black plastic case, c- coating<br>t- stainless steel case | 特征码<br>Feature No. |


| 料号<br>P/N | 铁芯尺寸<br>Bare core dimension<br>(mm) |     |    | 成品尺寸<br>Finished core dimension<br>(mm) |      |      | 截面积<br>Cross<br>section<br>area<br>(cm²) | 磁路长度<br>Magnetic<br>path<br>length<br>(cm) | 铁芯重量<br>Weight<br>(g) | 电感<br>AL<br>nominal<br>(μH) | 损耗<br>Core<br>loss<br>P<br>(W/kg) |
|-----------|-------------------------------------|-----|----|-----------------------------------------|------|------|------------------------------------------|--------------------------------------------|-----------------------|-----------------------------|-----------------------------------|
|           | OD                                  | ID  | HT | OD                                      | ID   | HT   | Ae                                       | Le                                         | m                     | 1kHz/0.3V                   | 20kHz,0.5T                        |
| NH0577-w  | 30                                  | 20  | 10 | 32.5                                    | 18.3 | 14.5 | 0.40                                     | 7.85                                       | 23                    | AL=34-65<br>@ 20kHz         | /                                 |
| NH0449-C  | 35                                  | 22  | 15 | 37                                      | 20.5 | 17   | 0.74                                     | 8.95                                       | 48                    | 22-65                       | ≤30                               |
| NH0002-b  | 50                                  | 32  | 20 | 55                                      | 27   | 25   | 1.37                                     | 12.87                                      | 128                   | 34-62                       | ≤25                               |
| NH0456    | 50                                  | 32  | 30 | 51                                      | 31   | 31   | 2.05                                     | 12.87                                      | 191                   | ≥48                         | ≤30                               |
| NH0586-C  | 54                                  | 39  | 55 | 57                                      | 36   | 58   | 3.14                                     | 14.61                                      | 333                   | ≥67                         | ≤30                               |
| NH0004-b  | 70                                  | 40  | 20 | 68                                      | 37   | 29   | 2.28                                     | 17.27                                      | 285                   | ≥44                         | ≤25                               |
| NH0286-f  | 70                                  | 40  | 25 | 76                                      | 39   | 26   | 2.85                                     | 17.27                                      | 357                   | ≥42                         | ≤25                               |
| NH0309-f  | 80                                  | 50  | 25 | 73                                      | 37   | 28   | 2.85                                     | 20.41                                      | 422                   | ≥52                         | ≤25                               |
| NH0637    | 85.5                                | 51  | 15 | 83                                      | 47   | 28   | 2.23                                     | 21.43                                      | 346                   | ≥52                         | ≤25                               |
| NH0393-f  | 90                                  | 60  | 50 | 93                                      | 57   | 53   | 5.71                                     | 23.55                                      | 975                   | ≥75                         | ≤30                               |
| NH0008-f  | 93                                  | 60  | 20 | 96                                      | 57   | 23   | 2.28                                     | 23.55                                      | 389                   | ≥34                         | ≤25                               |
| NH0009    | 93                                  | 60  | 25 | 96                                      | 57   | 28   | 2.85                                     | 23.55                                      | 487                   | ≥40                         | ≤25                               |
| NH0099-f  | 93                                  | 60  | 45 | 96                                      | 57   | 48   | 5.13                                     | 23.55                                      | 876                   | ≥70                         | ≤25                               |
| NH0648-f  | 93                                  | 60  | 70 | 96                                      | 57   | 73   | 7.98                                     | 23.55                                      | 1362                  | 80-140                      | ≤25                               |
| NH0011-b2 | 100                                 | 60  | 20 | 107                                     | 52   | 28   | 3.04                                     | 25.12                                      | 554                   | 38-68                       | ≤25                               |
| NH0475-f  | 100                                 | 75  | 45 | 103                                     | 72   | 48   | 4.28                                     | 27.48                                      | 853                   | ≥50                         | ≤30                               |
| NH0493-b  | 103                                 | 75  | 30 | 108                                     | 70   | 35   | 3.19                                     | 27.95                                      | 646                   | ≥35                         | ≤25                               |
| NH0017    | 107                                 | 70  | 25 | 109                                     | 68   | 27   | 3.52                                     | 27.79                                      | 709                   | ≥40                         | ≤25                               |
| NH0685-f  | 107                                 | 70  | 45 | 110                                     | 67   | 28   | 6.33                                     | 27.79                                      | 1275                  | 70-120                      | ≤25                               |
| NH0706-f  | 108                                 | 80  | 95 | 110                                     | 78   | 97   | 10.11                                    | 29.52                                      | 2164                  | 110-220                     | ≤30                               |
| NH0414-f  | 115                                 | 72  | 55 | 118                                     | 69   | 58   | 8.99                                     | 29.36                                      | 1914                  | ≥210                        | ≤30                               |
| NH0021-b4 | 120                                 | 60  | 30 | 126                                     | 55   | 36   | 6.84                                     | 28.26                                      | 1401                  | ≥72                         | ≤25                               |
| NH0733-b4 | 120                                 | 70  | 20 | 126                                     | 65   | 26   | 3.80                                     | 29.83                                      | 822                   | AL≥35 @10kHz                | ≤25                               |
| NH0284-b4 | 120                                 | 70  | 30 | 126                                     | 65   | 36   | 5.71                                     | 29.83                                      | 1235                  | ≥80                         | ≤25                               |
| NH0042-f  | 120                                 | 80  | 45 | 123                                     | 77   | 48   | 6.84                                     | 31.42                                      | 1558                  | ≥63                         | ≤25                               |
| NH0026-b8 | 130                                 | 80  | 40 | 137                                     | 75   | 47   | 7.61                                     | 32.97                                      | 1819                  | ≥72                         | ≤25                               |
| NH0027-b8 | 130                                 | 80  | 50 | 138                                     | 77   | 56   | 9.51                                     | 32.97                                      | 2273                  | ≥90                         | ≤25                               |
| NH0037-b8 | 130                                 | 80  | 60 | 138                                     | 76   | 71   | 11.41                                    | 32.97                                      | 2727                  | ≥108                        | ≤25                               |
| NH0029-b  | 130                                 | 90  | 50 | 137                                     | 84   | 56   | 7.62                                     | 34.54                                      | 1908                  | ≥69                         | ≤25                               |
| NH0448-f  | 154                                 | 105 | 45 | 157                                     | 102  | 48   | 8.38                                     | 40.66                                      | 2470                  | ≥104                        | ≤30                               |

备注：\*表中性能仅供客户初步设计选型用，具体性能参数以承认书为准。      \*可根据客户要求制作各种环形、矩形、钳表形及其它形状的铁芯。  
\*The provided data is for customer's initial design guidelines only, please check the approval data sheet before ordering. \*Toroidal, Oval, Clamp Shape or other customized designs are available.

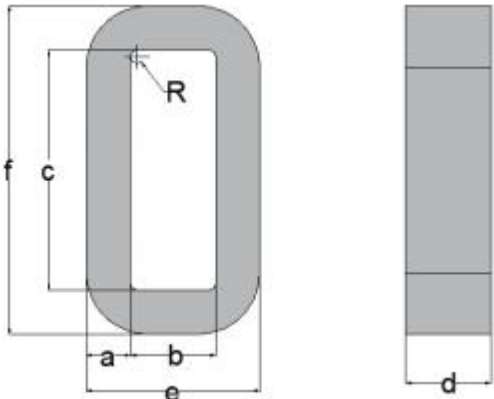


| 料号<br>P/N | 铁芯尺寸<br>Bare core dimension | 叠厚<br>Stacked<br>thickness<br>(mm) | 窗口宽度<br>Window<br>Width<br>(mm) | 窗口长度<br>Window<br>Length<br>(mm) | 铁芯高度<br>Core<br>Height<br>(mm) | 铁芯宽度<br>Core<br>width<br>(mm) | 铁芯长度<br>Core<br>Length<br>(mm) | 内圆角<br>R Angle | 截面积<br>Cross<br>section<br>area<br>(cm²) | 磁路长度<br>Magnetic<br>path<br>length<br>(cm) | 重量<br>Weight<br>(g) | 电感<br>AL<br>nominal<br>(μH) | 损耗<br>Core<br>loss<br>P<br>(W/kg)     |
|-----------|-----------------------------|------------------------------------|---------------------------------|----------------------------------|--------------------------------|-------------------------------|--------------------------------|----------------|------------------------------------------|--------------------------------------------|---------------------|-----------------------------|---------------------------------------|
|           | c * b / a * d               | a                                  | b                               | c                                | d                              | e                             | f                              | R              | Ae                                       | Le                                         | m                   | 1kHz/0.3V                   | 20kHz,0.5T                            |
| NH0666-f  | 76*55/10*60                 | 10                                 | 55                              | 76                               | 60                             | 75                            | 96                             | 10             | 4.80                                     | 27.79                                      | 973                 | 58-130                      | ≤30                                   |
| NH0635-f  | 76*55/16*50                 | 16                                 | 55                              | 76                               | 50                             | 87                            | 108                            | 5              | 6.40                                     | 30.77                                      | 1440                | 50-150                      | ≤30                                   |
| NH0619-f  | 76*55/16*70                 | 16                                 | 55                              | 76                               | 70                             | 87                            | 108                            | 5              | 8.96                                     | 30.77                                      | 2010                | 85-180                      | ≤30                                   |
| NH0804-f  | 95*55/12*60                 | 12                                 | 55                              | 95                               | 60                             | 79                            | 119                            | 10             | 5.76                                     | 32.34                                      | 1360                | 50-140                      | ≤30                                   |
| NH0567    | 130*50/20*25                | 20                                 | 50                              | 130                              | 25                             | 90                            | 170                            | 10             | 4.00                                     | 40.89                                      | 1210                | ≥88                         | ≤30                                   |
| NH0779    | 160*60/15*90                | 15                                 | 60                              | 160                              | 90                             | 90                            | 190                            | 30             | 10.80                                    | 43.96                                      | 3466                | 50kHz/0.3V, Al≥80           | 50kHz/0.23T, P≤35                     |
| NH0782    | 146*66/27*35                | 27                                 | 66                              | 146                              | 35                             | 120                           | 200                            | 2              | 7.56                                     | 51.13                                      | 2846                | ≥135                        | 15kHz/0.36T, P≤35                     |
| NH0588    | 130*50/40*50                | 40                                 | 50                              | 130                              | 50                             | 130                           | 210                            | 3              | 16.00                                    | 48.67                                      | 5685                | ≥280                        | 20kHz/0.2T, P≤2.5                     |
| NH0712    | 140*95/45*30                | 45                                 | 95                              | 140                              | 30                             | 185                           | 230                            | 10             | 10.80                                    | 57.97                                      | 4780                | ≥160                        | ≤30                                   |
| NH0715    | 184*47/25*80                | 25                                 | 47                              | 184                              | 80                             | 97                            | 234                            | 5              | 16.00                                    | 53.85                                      | 6465                | 100-170                     | 20kHz/0.3T, P≤10                      |
| NH0795    | 155*60/40*40                | 40                                 | 60                              | 155                              | 40                             | 140                           | 235                            | 2              | 12.80                                    | 55.65                                      | 5300                | ≥200                        | 15kHz/0.4T, P≤15                      |
| NH0679    | 160*35/40*75                | 40                                 | 35                              | 160                              | 75                             | 115                           | 240                            | 3              | 24.00                                    | 51.57                                      | 9095                | ≥420                        | 40kHz/0.3T, P≤35                      |
| NH0410    | 168*90/40*40                | 40                                 | 90                              | 168                              | 40                             | 170                           | 248                            | 10             | 12.80                                    | 63.11                                      | 5925                | ≥180                        | ≤20                                   |
| NH0450    | 160*60/45*50                | 45                                 | 60                              | 160                              | 50                             | 150                           | 250                            | 10             | 18.00                                    | 57.93                                      | 7700                | 20kHz/0.3V, Al≥120          | ≤30                                   |
| NH0780    | 200*150/45*50               | 45                                 | 150                             | 200                              | 50                             | 240                           | 290                            | 20             | 18.00                                    | 81.49                                      | 10825               | ≥65                         | 40kHz/0.3T, P≤35                      |
| NH0674    | 210*115/45*50               | 45                                 | 115                             | 210                              | 50                             | 205                           | 300                            | 20             | 18.00                                    | 76.15                                      | 10000               | ≥210                        | 40kHz/0.3T, P≤28                      |
| NH0725    | 234*170/35*30               | 35                                 | 170                             | 234                              | 30                             | 240                           | 304                            | 15             | 8.40                                     | 90.03                                      | 5560                | ≥82                         | ≤30                                   |
| NH0599-f  | 215*195/50*60               | 50                                 | 195                             | 215                              | 60                             | 295                           | 315                            | 15             | 24.00                                    | 95.93                                      | 16975               | ≥240                        | ≤30                                   |
| NH0694    | 230*115/50*40               | 50                                 | 115                             | 230                              | 40                             | 215                           | 330                            | 10             | 16.00                                    | 83.83                                      | 9890                | ≥170                        | 7.4kHz/0.7T, P≤9<br>7.4kHz/0.8T, P≤11 |
| NH0761    | 240*120/50*50               | 50                                 | 120                             | 240                              | 50                             | 220                           | 340                            | 20             | 20.00                                    | 85.09                                      | 12548               | ≥210                        | ≤35                                   |
| NH0697    | 240*140/50*50               | 50                                 | 140                             | 240                              | 50                             | 240                           | 340                            | 20             | 20.00                                    | 89.01                                      | 13126               | ≥200                        | 7.4kHz/0.63T, P≤11                    |
| NH0430    | 260*160/50*50               | 50                                 | 160                             | 260                              | 50                             | 260                           | 360                            | 20             | 20.00                                    | 98.91                                      | 14440               | ≥180                        | ≤30                                   |
| NH0246    | 280*150/45*50               | 45                                 | 150                             | 280                              | 50                             | 240                           | 370                            | 20             | 18.00                                    | 97.02                                      | 13050               | ≥165                        | 40kHz/0.3T, P≤35                      |
| NH0354-f  | 250*250/70*70               | 70                                 | 250                             | 250                              | 70                             | 390                           | 390                            | 20             | 39.20                                    | 119.79                                     | 34525               | ≥290                        | ≤30                                   |
| NH0486-02 | 273*170/60*60               | 60                                 | 170                             | 273                              | 60                             | 290                           | 393                            | 20             | 28.80                                    | 105.19                                     | 22300               | ≥245                        | 20kHz/50mT, P≤0.26                    |
| NH0771    | 330*150/45*50               | 45                                 | 150                             | 330                              | 50                             | 240                           | 420                            | 20             | 18.00                                    | 107.86                                     | 14330               | ≥150                        | 40kHz/0.3T, P≤35                      |
| NH0702    | 320*170/60*60               | 60                                 | 170                             | 320                              | 60                             | 290                           | 440                            | 10             | 28.80                                    | 116.33                                     | 24665               | ≥220                        | 20kHz/0.34T, P≤20<br>50kHz/0.1T, P≤12 |
| NH0486-01 | 360*210/50*50               | 50                                 | 210                             | 360                              | 50                             | 310                           | 460                            | 15             | 20.00                                    | 127.79                                     | 18660               | 65-125                      | 20kHz/50mT, P≤0.26                    |


备注：\*表中性能仅供客户初步设计选型用，具体性能参数以承认书为准。      \*可根据客户要求制作各种环形、矩形、钳表形及其它形状的铁芯。  
\*The provided data is for customer's initial design guidelines only, please check the approval data sheet before ordering. \*Toroidal, Oval, Clamp Shape or other customized designs are available.

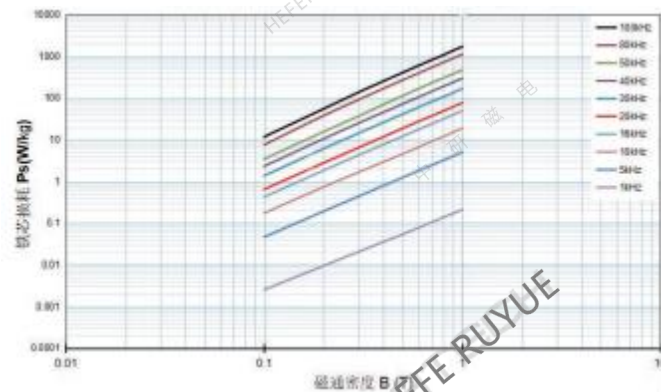

图一：逆变变压器磁心损耗参考曲线图  
Fig1 LOSS curve diagram of transformer magnetic core

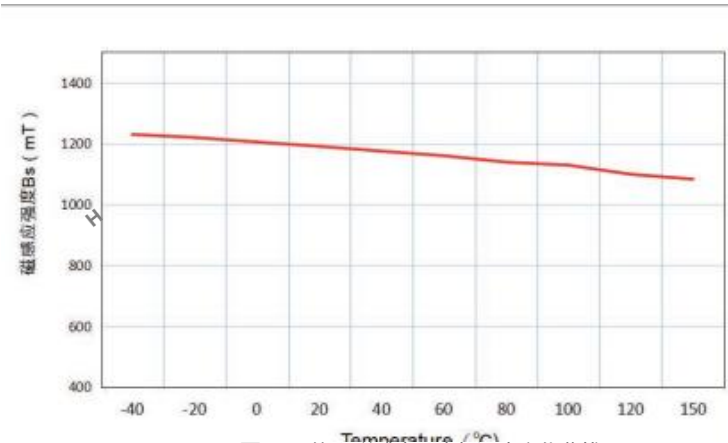

图二：饱和磁感应强度与温度变化曲线  
Fig2 Realitive change of Bs vs Temperature

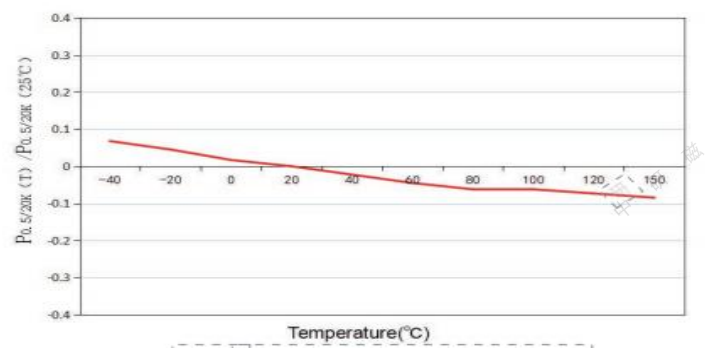

图三：逆变变压器磁心损耗与温度变化曲线图  
Fig3 Realitive change of Ps vs Temperature

# 钴基非晶铁芯 CACO-01


## CACO-01 Co-based Amorphous Core

### 应用领域 Application

- 磁放大器 Magnetic Amplifier
- 漏电流互感器 Leakage Current Transformer
- 磁传感器 Magnetic Sensor
- 尖峰抑制器 Spike Suppressor

### 性能特点 Features

- 低矫顽力，低损耗，高矩形比  
Low Hc, low loss, high squareness ratio
- 当电流为零时具有非常大的电感量，有效的阻挡了由二极管产生的反向复位电流，可用于尖峰抑制器具有非常高的矩形比，在很小的电流下就可以达到饱和，可用于漏电保护非常低的磁致伸缩系数，可在极端条件下稳定工作  
When the current is zero, it has a very large inductance, effectively blocking the reverse reset current generated by the diode, it can be used as peak suppressor With a very high squareness ratio, it can reach saturation at a very small current and can be used for leakage protection Very low magnetostriction coefficient, stable work under extreme conditions

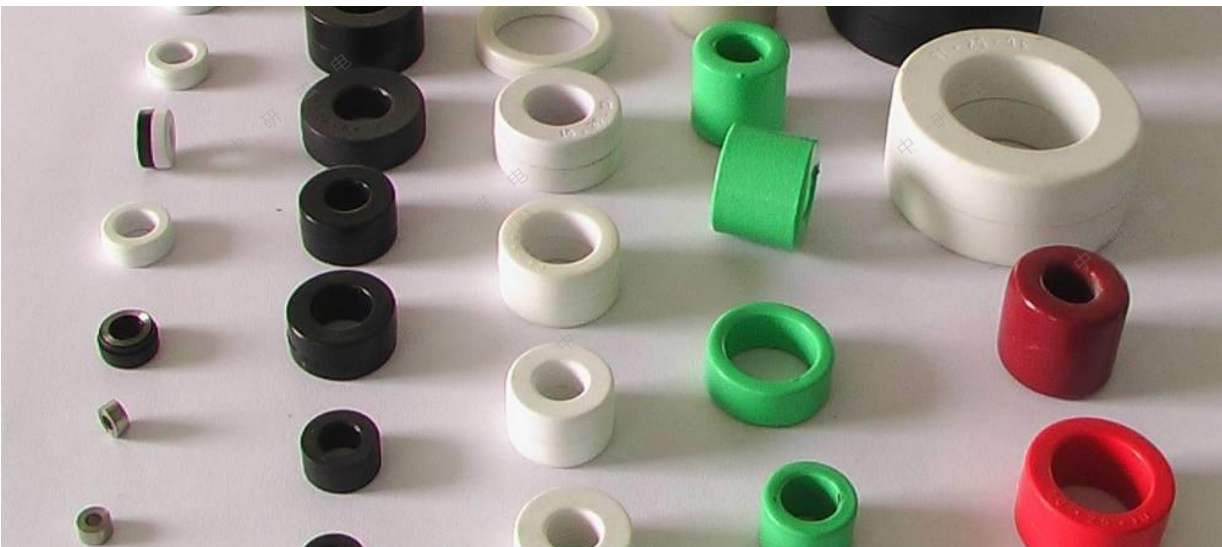


性能指标 performance index

| 项目 Description                                                  | 项目符号 Item-symbol | 参考值 Refer Value         |
|-----------------------------------------------------------------|------------------|-------------------------|
| 饱和磁通密度(25℃)<br>Saturate Magnetic Flux Density(25℃)              | T                | 0.55                    |
| 饱和磁致伸缩(25℃)<br>Saturate Magnetostriction (25℃)                  | λs               | < 0 .2×10 <sup>-6</sup> |
| 居里温度 (℃)<br>Curie Temperature                                   | Tc               | 256                     |
| 双级磁通密度△Bss(25℃)<br>Two-stage Magnetic Flux Density △Bss (25℃)   | T                | 1.14                    |
| 双级磁通密度△Bss(90℃)<br>Two-stage Magnetic Flux Density △Bss (90℃)   | T                | 1.0                     |
| 双级磁通密度△Bss(120℃)<br>Two-stage Magnetic Flux Density △Bss (120℃) | T                | 0.8                     |
| 矩形比<br>Square Ratio Br/Bm                                       | %                | 94                      |
| 连续工作温度 (℃)<br>Continuous Working Temperature                    | /                | 90                      |


|                 |                                               |                              |                    |                           |                    |
|-----------------|-----------------------------------------------|------------------------------|--------------------|---------------------------|--------------------|
| 产品规格编码说明        | CACO                                          | 01                           | 0001               | H                         | 47                 |
| P/N Description | 钴基非晶铁芯代号<br>Co-based<br>Amorphous Core Series | 钴基类别<br>Co-based<br>Category | 规格序号<br>Serial No. | 高矩形比<br>High Square Ratio | 特征码<br>Feature No. |

| 型号<br>P/N      | 铁芯尺寸<br>Core Dimension                                 |                                 |                 |                | 截面积<br>Cross section<br>area | 平均磁路长度<br>Magnetic<br>Iron Path<br>Length | 铁芯<br>重量<br>Weight |
|----------------|--------------------------------------------------------|---------------------------------|-----------------|----------------|------------------------------|-------------------------------------------|--------------------|
|                | 铁芯规格<br>Bare Core<br>Dimension<br>OD X ID X H<br>(mm ) | 成品尺寸<br>Finished Core Dimension |                 |                |                              |                                           |                    |
|                |                                                        | OD(mm)<br>(max)                 | ID(mm)<br>(min) | H(mm)<br>(max) | Ae<br>(cm²)                  | Le<br>(cm)                                | m<br>(g)           |
| CACO-01-0001-H | 10x8x4                                                 | 12.1                            | 5.9             | 6.1            | 0.032                        | 2.83                                      | 0.69               |
| CACO-01-0002-H | 10.1x6.9x4.5                                           | 12.1                            | 4.8             | 6.6            | 0.057                        | 2.67                                      | 1.17               |
| CACO-01-0004-H | 12x8x4                                                 | 14.1                            | 5.9             | 6.1            | 0.064                        | 3.14                                      | 1.53               |
| CACO-01-0005-H | 12.5x10x5                                              | 14.6                            | 7.9             | 7.1            | 0.05                         | 3.5                                       | 1.34               |
| CACO-01-0003-H | 12.8x9.5x3.2                                           | 14.9                            | 7.4             | 5.5            | 0.042                        | 3.5                                       | 1.12               |
| CACO-01-0006-H | 14x8x4.5                                               | 16.1                            | 5.9             | 6.6            | 0.11                         | 3.45                                      | 2.84               |
| CACO-01-0023-H | 14x10x4.5                                              | 16.1                            | 7.9             | 6.6            | 0.072                        | 3.77                                      | 2.06               |
| CACO-01-0028-H | 14.7x13x3.2                                            | 16.8                            | 10.9            | 5.3            | 0.022                        | 4.35                                      | 0.72               |
| CACO-01-0007-H | 15x10x4.5                                              | 17.1                            | 7.9             | 6.6            | 0.09                         | 3.92                                      | 2.68               |
| CACO-01-0008-H | 15x10x6                                                | 17.1                            | 7.9             | 8.1            | 0.12                         | 3.92                                      | 3.58               |
| CACO-01-0009-H | 16x10x6                                                | 18.1                            | 7.9             | 8.1            | 0.144                        | 4.01                                      | 4.47               |
| CACO-01-0010-H | 17.5x12.5x6                                            | 19.6                            | 10.4            | 8.1            | 0.12                         | 4.67                                      | 4.3                |
| CACO-01-0024-H | 18.4x17x5                                              | 20.5                            | 14.9            | 7.1            | 0.028                        | 5.56                                      | 1.18               |
| CACO-01-0011-H | 19x15x5                                                | 21.1                            | 12.9            | 7.1            | 0.08                         | 5.34                                      | 3.25               |
| CACO-01-0012-H | 19x15x10                                               | 21.1                            | 12.9            | 12.1           | 0.16                         | 5.34                                      | 6.49               |
| CACO-01-0027-H | 19x17x5                                                | 21.1                            | 12.9            | 7.1            | 0.044                        | 5.64                                      | 1.72               |
| CACO-01-0013-H | 20x12.5x8                                              | 22.1                            | 10.4            | 10.1           | 0.24                         | 5.1                                       | 9.31               |
| CACO-01-0039-H | 20x14x5                                                | 22.1                            | 11.9            | 7.1            | 0.12                         | 5.34                                      | 4.87               |
| CACO-01-0060-H | 21x19x3                                                | 23.1                            | 16.9            | 5.1            | 0.024                        | 6.28                                      | 1.15               |
| CACO-01-0029-H | 22x14x5                                                | 24.1                            | 11.9            | 7.1            | 0.16                         | 5.65                                      | 6.87               |
| CACO-01-0017-H | 23x16.5x3                                              | 25.1                            | 14.4            | 5.1            | 0.078                        | 6.2                                       | 3.68               |
| CACO-01-0053-H | 23x17x3                                                | 25.1                            | 14.9            | 5.1            | 0.072                        | 6.28                                      | 3.44               |
| CACO-01-0025-H | 24.4x23x5                                              | 26.5                            | 20.9            | 7.1            | 0.028                        | 7.44                                      | 1.58               |
| CACO-01-0014-H | 25x20x10                                               | 27.1                            | 17.9            | 12.1           | 0.2                          | 7.03                                      | 10.74              |
| CACO-01-0015-H | 25x16x10                                               | 27.1                            | 13.9            | 12.1           | 0.36                         | 6.44                                      | 17.61              |
| CACO-01-0026-H | 25x23x5                                                | 27.1                            | 20.9            | 7.1            | 0.04                         | 7.54                                      | 2.29               |
| CACO-01-0016-H | 30x20x10                                               | 32.1                            | 17.9            | 12.1           | 0.4                          | 7.85                                      | 23.86              |
| CACO-01-0018-H | 45x36x15                                               | 47.1                            | 33.9            | 17.1           | 0.54                         | 12.72                                     | 52.19              |
| CACO-01-0019-H | 45x30x15                                               | 47.1                            | 27.9            | 17.1           | 0.9                          | 11.77                                     | 80.54              |
| CACO-01-0021-H | 45x32x15                                               | 47.1                            | 29.9            | 17.1           | 0.78                         | 12.09                                     | 71.66              |
| CACO-01-0022-H | 49x41x6.5                                              | 51.1                            | 38.9            | 8.6            | 0.208                        | 14.13                                     | 22.34              |


备注：\*表中性能仅供客户初步设计选型用，具体性能参数以承认书为准。      \*可根据客户要求制作各种环形、矩形、钳表形及其它形状的铁芯。  
\*The provided data is for customer's initial design guidelines only, please check the approval data sheet before ordering.    \*Toroidal, Oval, Clamp Shape or other customized designs are available.

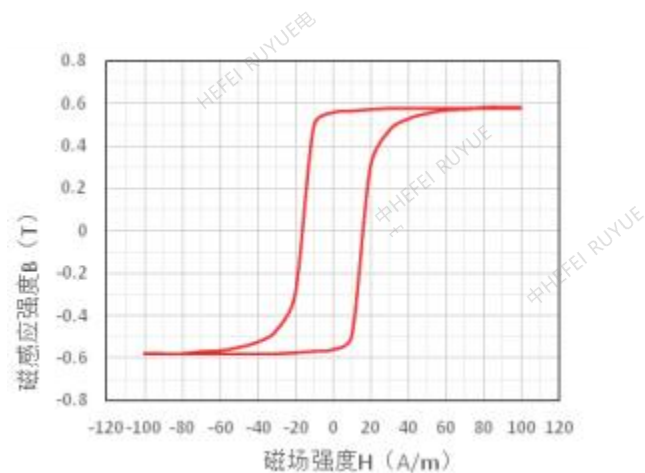


图一：交流 B-H 磁滞回线  
fig1 AC B-H Magnetic Hysteresis Loop

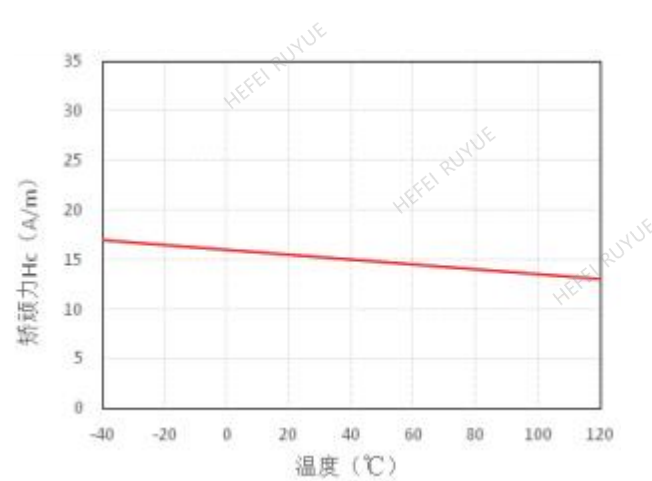

图二：矫顽力  $H_c$  与温度的关系  
fig2 Realitive Change of Coercivity  $H_c$  vs Temperature

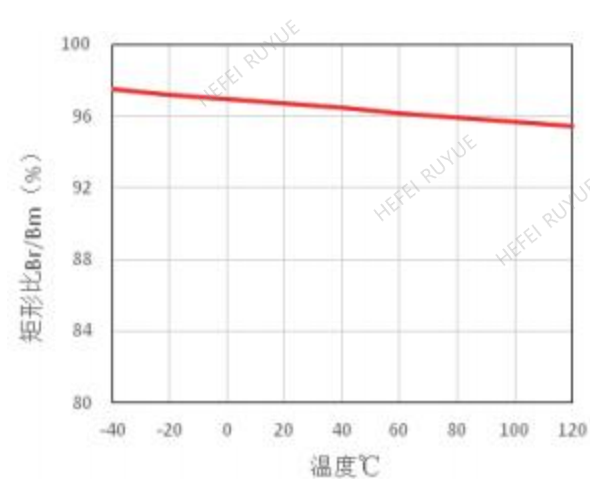

图三：矩形比  $(Br/B_m)$  与温度的关系  
fig3 Realitive Change of Squareness Ratio  
 $(Br/B_m)$  vs Temperature

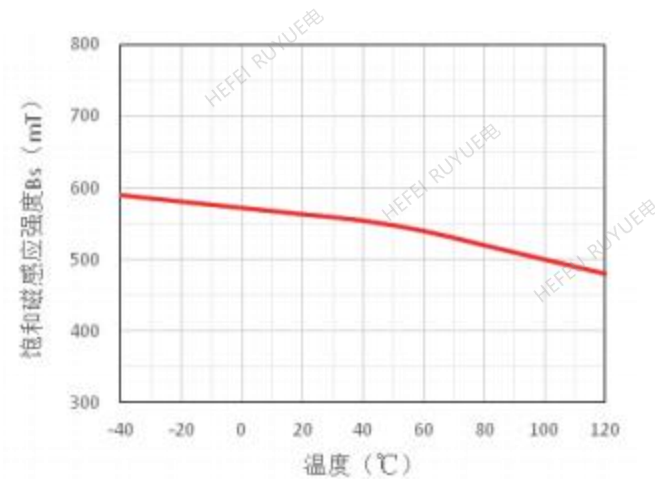

图四：饱和磁感应强度  $(B_s)$  与温度的关系  
fig4 Realitive Change of Saturate Magnetic  
Flux Density  $(B_s)$  vs Temperature

## 钴基非晶铁芯 CACO-02 CACO-02 Co-based Amorphous Core

### 应用领域 Application

- 单体抗直流分量互感器  
DC Immune Single CT Core
- 网络变压器  
Network Transformer
- 栅极驱动变压器  
Gate Drive Transformer

### 性能特点 Features

- 闭环磁路：对干扰源的低灵敏性，通常不需要屏蔽罩  
Closed loop magnetic circuit: low sensitivity to interference sources, no shield required in generally.
- 极低的线性相位误差，高线性度易于补偿  
Very low linear phase error, high linearity and easy to compensate
- 特别低的温度依赖性  
Very low temperature dependence



| 项目 Description                                                 | 项目符号 Item-symbol | 参考值 Refer Value         |
|----------------------------------------------------------------|------------------|-------------------------|
| 性能指标 Performance Index<br>Saturate Magnetic Flux Density(25°C) | T                | 0.9                     |
| 饱和磁致伸缩(25°C)<br>Saturate Magnetostriction (25°C)               | λs               | < 0 .2×10 <sup>-6</sup> |
| 居里温度(°C)<br>Curie Temperature                                  | Tc               | 485                     |
| 双级磁通密度(25°C)<br>Two-stage Magnetic Flux Density (25°C)         | △ Bss            | 1.8                     |
| 双级磁通密度(90°C)<br>Two-stage Magnetic Flux Density (90°C)         | △ Bss            | 1.7                     |
| 双级磁通密度(120°C)<br>Two-stage Magnetic Flux Density (120°C)       | △ Bss            | 1.35                    |
| 连续最高工作温度(°C)<br>Continuous maximum working temperature         | /                | 90                      |

|                 |                                               |                              |                    |                          |                    |
|-----------------|-----------------------------------------------|------------------------------|--------------------|--------------------------|--------------------|
| 产品规格编码说明        | CACO                                          | 02                           | 0001               | f                        | 01                 |
| P/N Description | 钴基非晶铁芯代号<br>Co-based<br>Amorphous Core Series | 钴基类别<br>Co-based<br>Category | 规格序号<br>Serial No. | 高线性<br>High Square Ratio | 特征码<br>Feature No. |

| 型号<br>P/N      | 铁芯尺寸<br>Core Dimension                                 |                                 |                 |                | 截面积<br>Cross<br>section<br>area | 磁路长度<br>Magnetic<br>Iron<br>Path<br>Length | 铁芯<br>重量<br>Weight | 电感<br>Inductance<br>10kHz/<br>0.1V, 1Ts |
|----------------|--------------------------------------------------------|---------------------------------|-----------------|----------------|---------------------------------|--------------------------------------------|--------------------|-----------------------------------------|
|                | 铁芯规格<br>Bare Core<br>Dimension<br>OD X ID X H<br>(mm ) | 成品尺寸<br>Finished Core Dimension |                 |                |                                 |                                            |                    |                                         |
|                |                                                        | OD(mm)<br>(max)                 | ID(mm)<br>(min) | H(mm)<br>(max) | Ae<br>(cm²)                     | Le<br>(cm)                                 | m<br>(g)           | AL<br>(μH)                              |
| CACO-02-0013-f | 7.8x3.8x3.8                                            | 8.5                             | 3.4             | 4.4            | 0.064                           | 1.82                                       | 0.89               | 0.65                                    |
| CACO-02-0017-f | 22x17x6.6                                              | 22.5                            | 16.3            | 7.4            | 0.138                           | 6.12                                       | 6.43               | 0.42                                    |
| CACO-02-0016-f | 24.5x15.5x7                                            | 25                              | 14.8            | 7.8            | 0.297                           | 6.12                                       | 13.85              | 0.80                                    |
| CACO-02-0015-f | 25x20x6.5                                              | 26.5                            | 19.3            | 7.3            | 0.138                           | 7.06                                       | 7.42               | 0.36                                    |
| CACO-02-0019-f | 25.5x19x9                                              | 27                              | 18.3            | 9.8            | 0.248                           | 6.98                                       | 13.21              | 0.65                                    |
| CACO-02-0018-f | 30.4x22.4x8                                            | 32                              | 22.7            | 8.8            | 0.272                           | 8.29                                       | 17.14              | 0.6                                     |
| CACO-02-0014-f | 40x30x1.5                                              | 41.5                            | 29.3            | 2.3            | 0.064                           | 10.99                                      | 5.33               | 0.1                                     |

性能曲线 Performance Curve

